

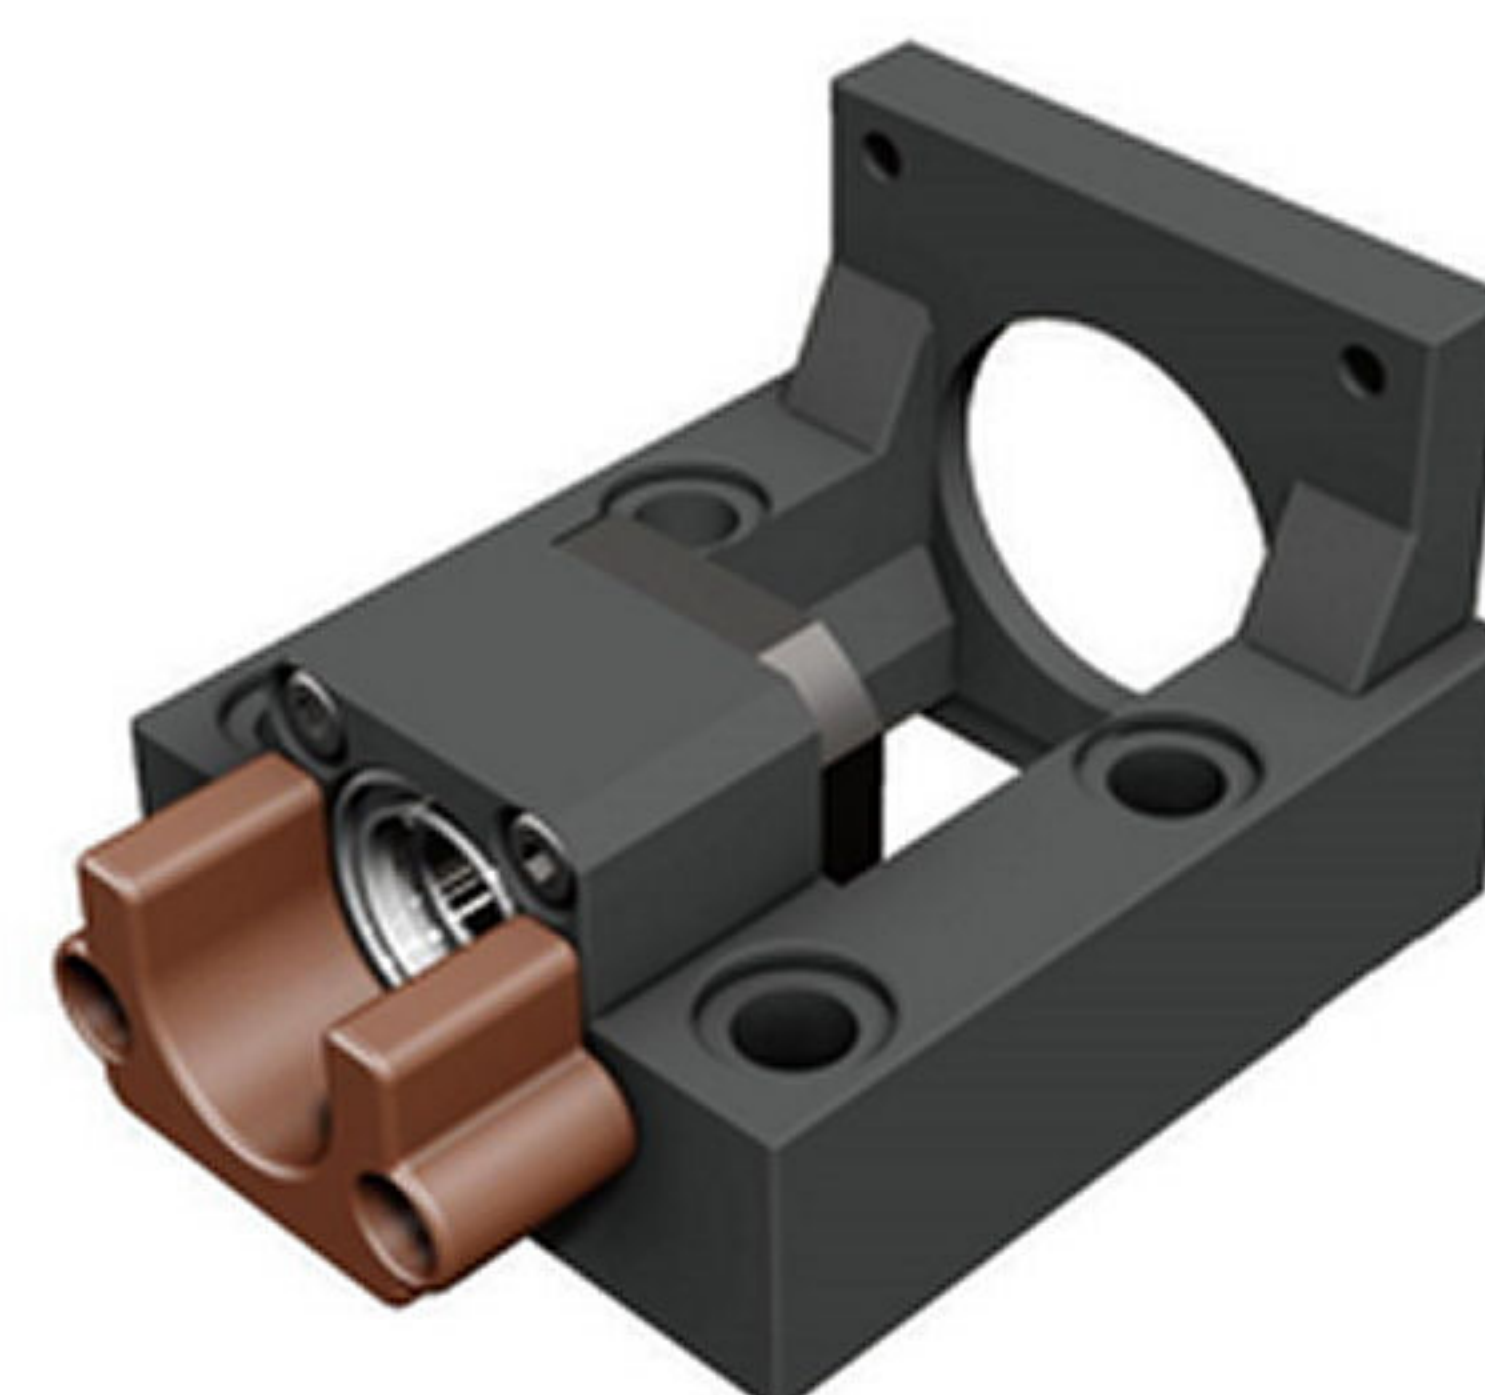
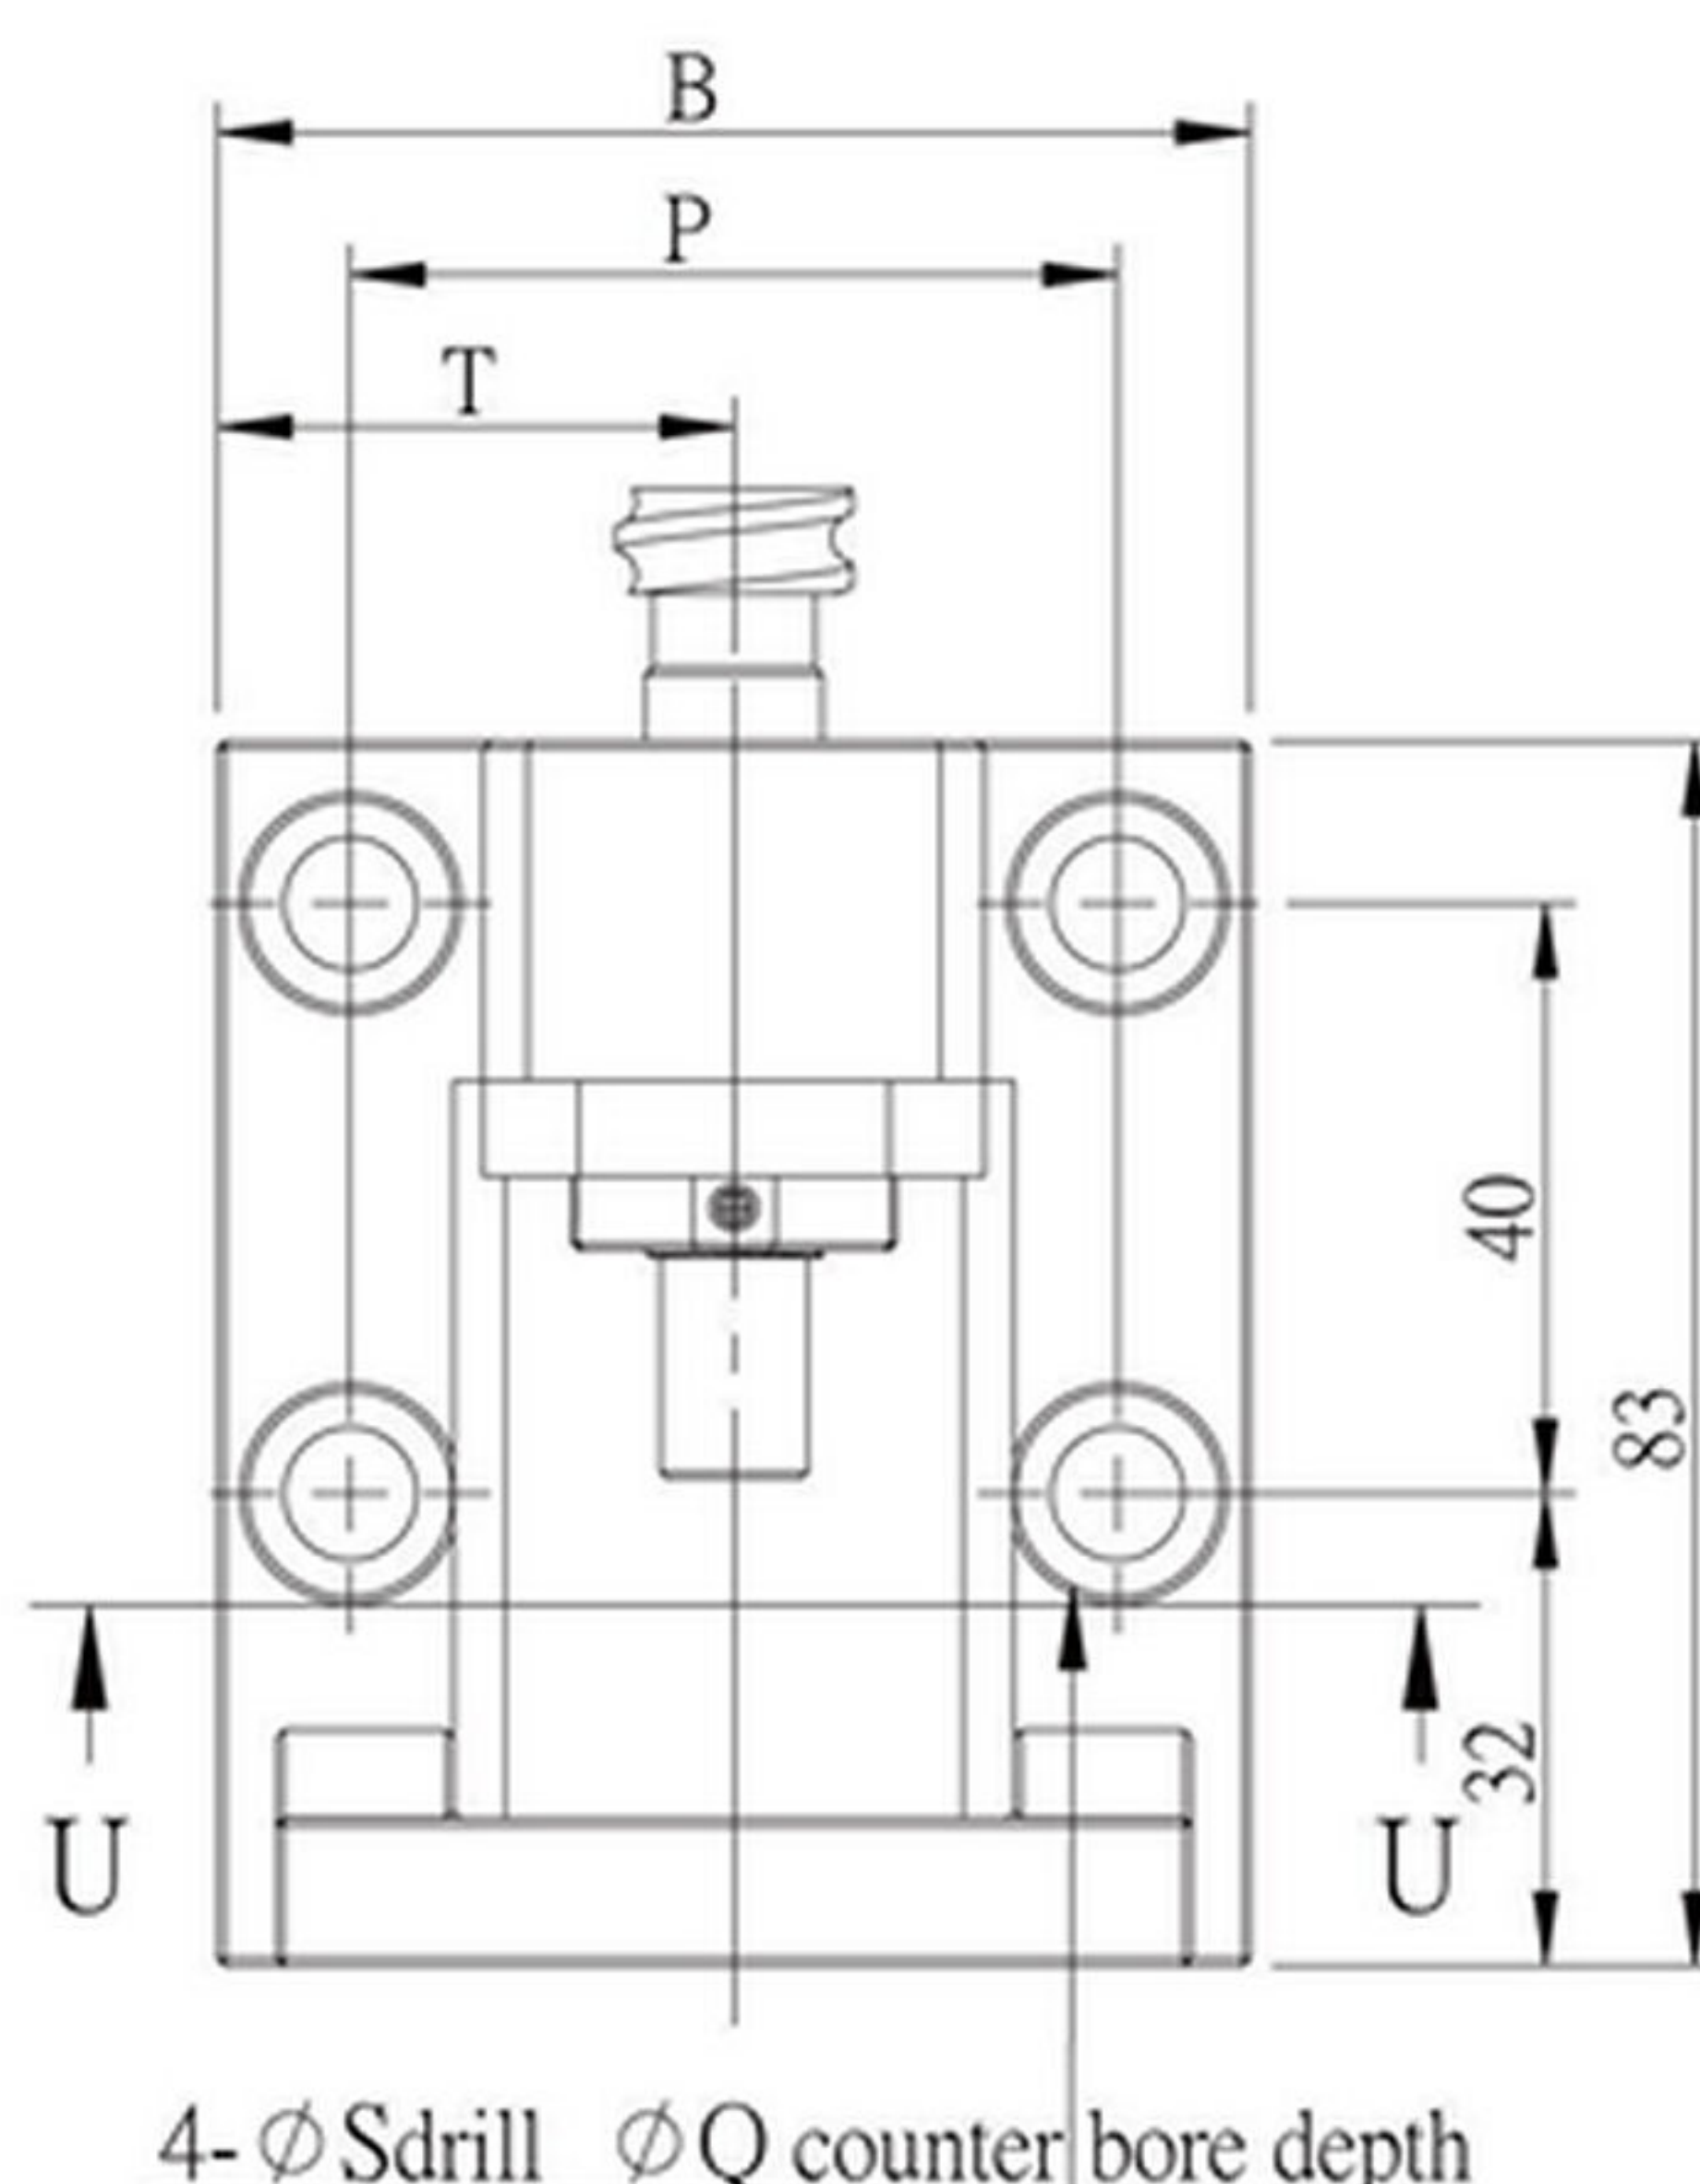
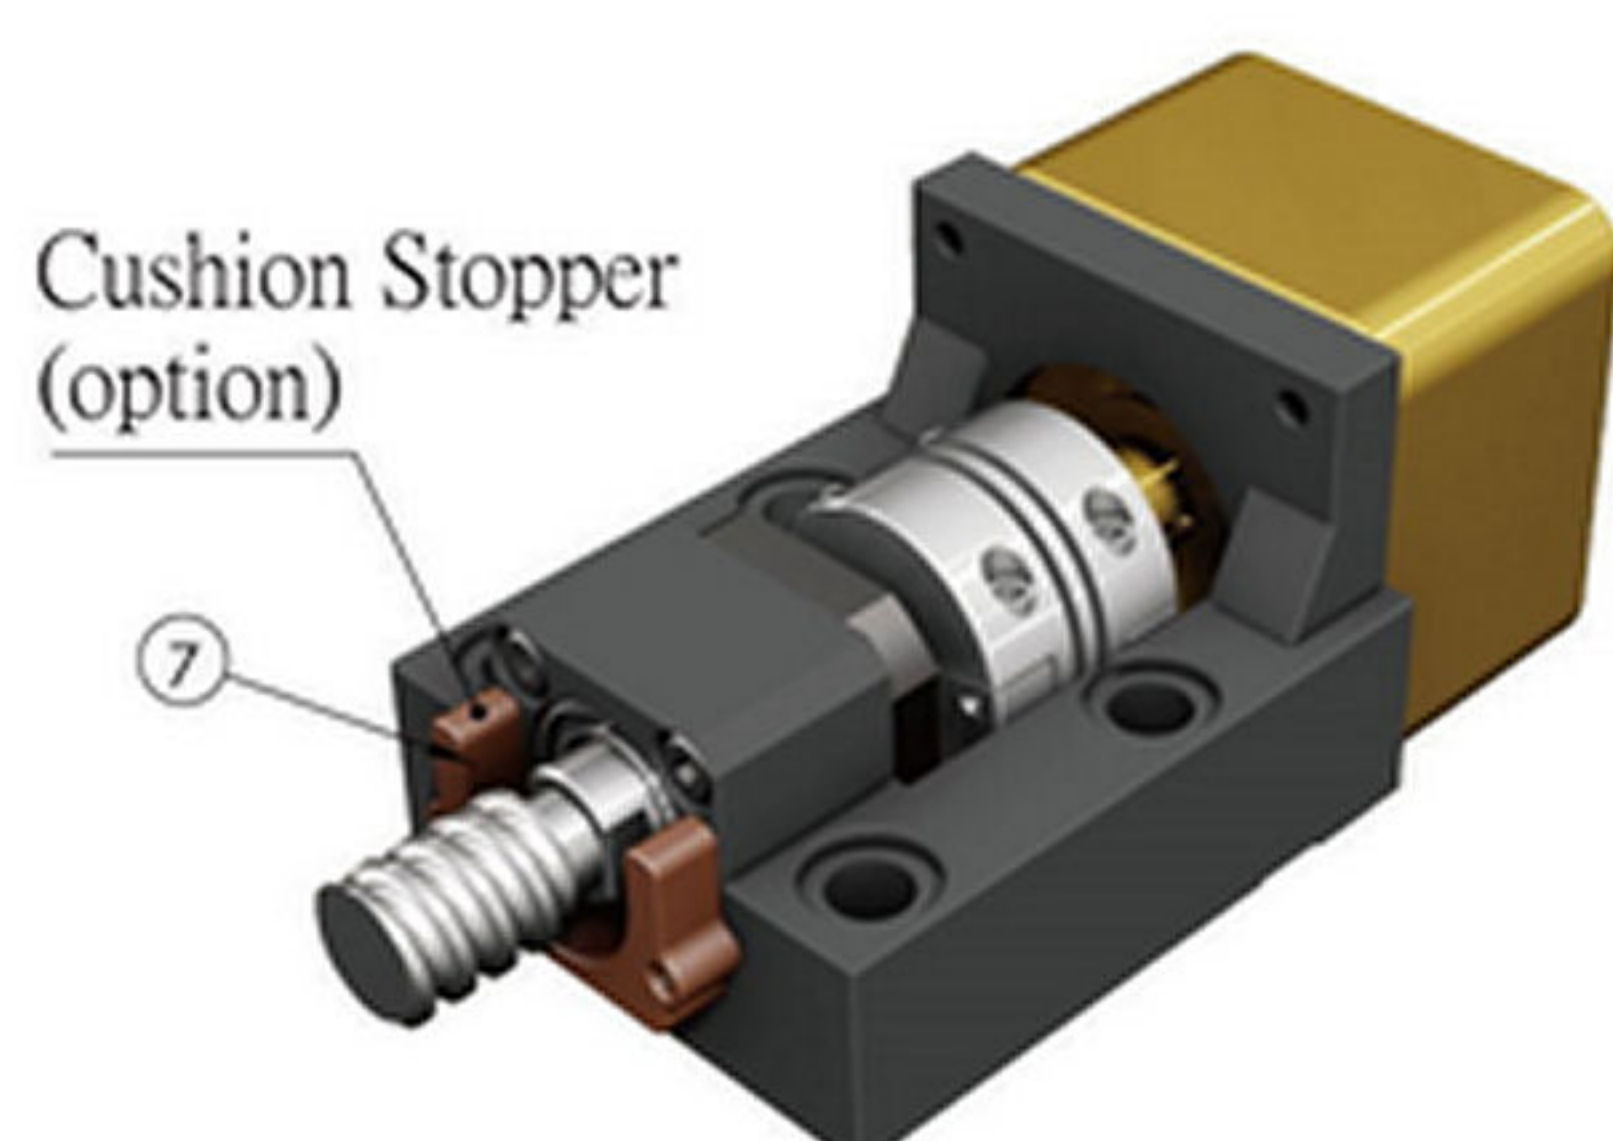
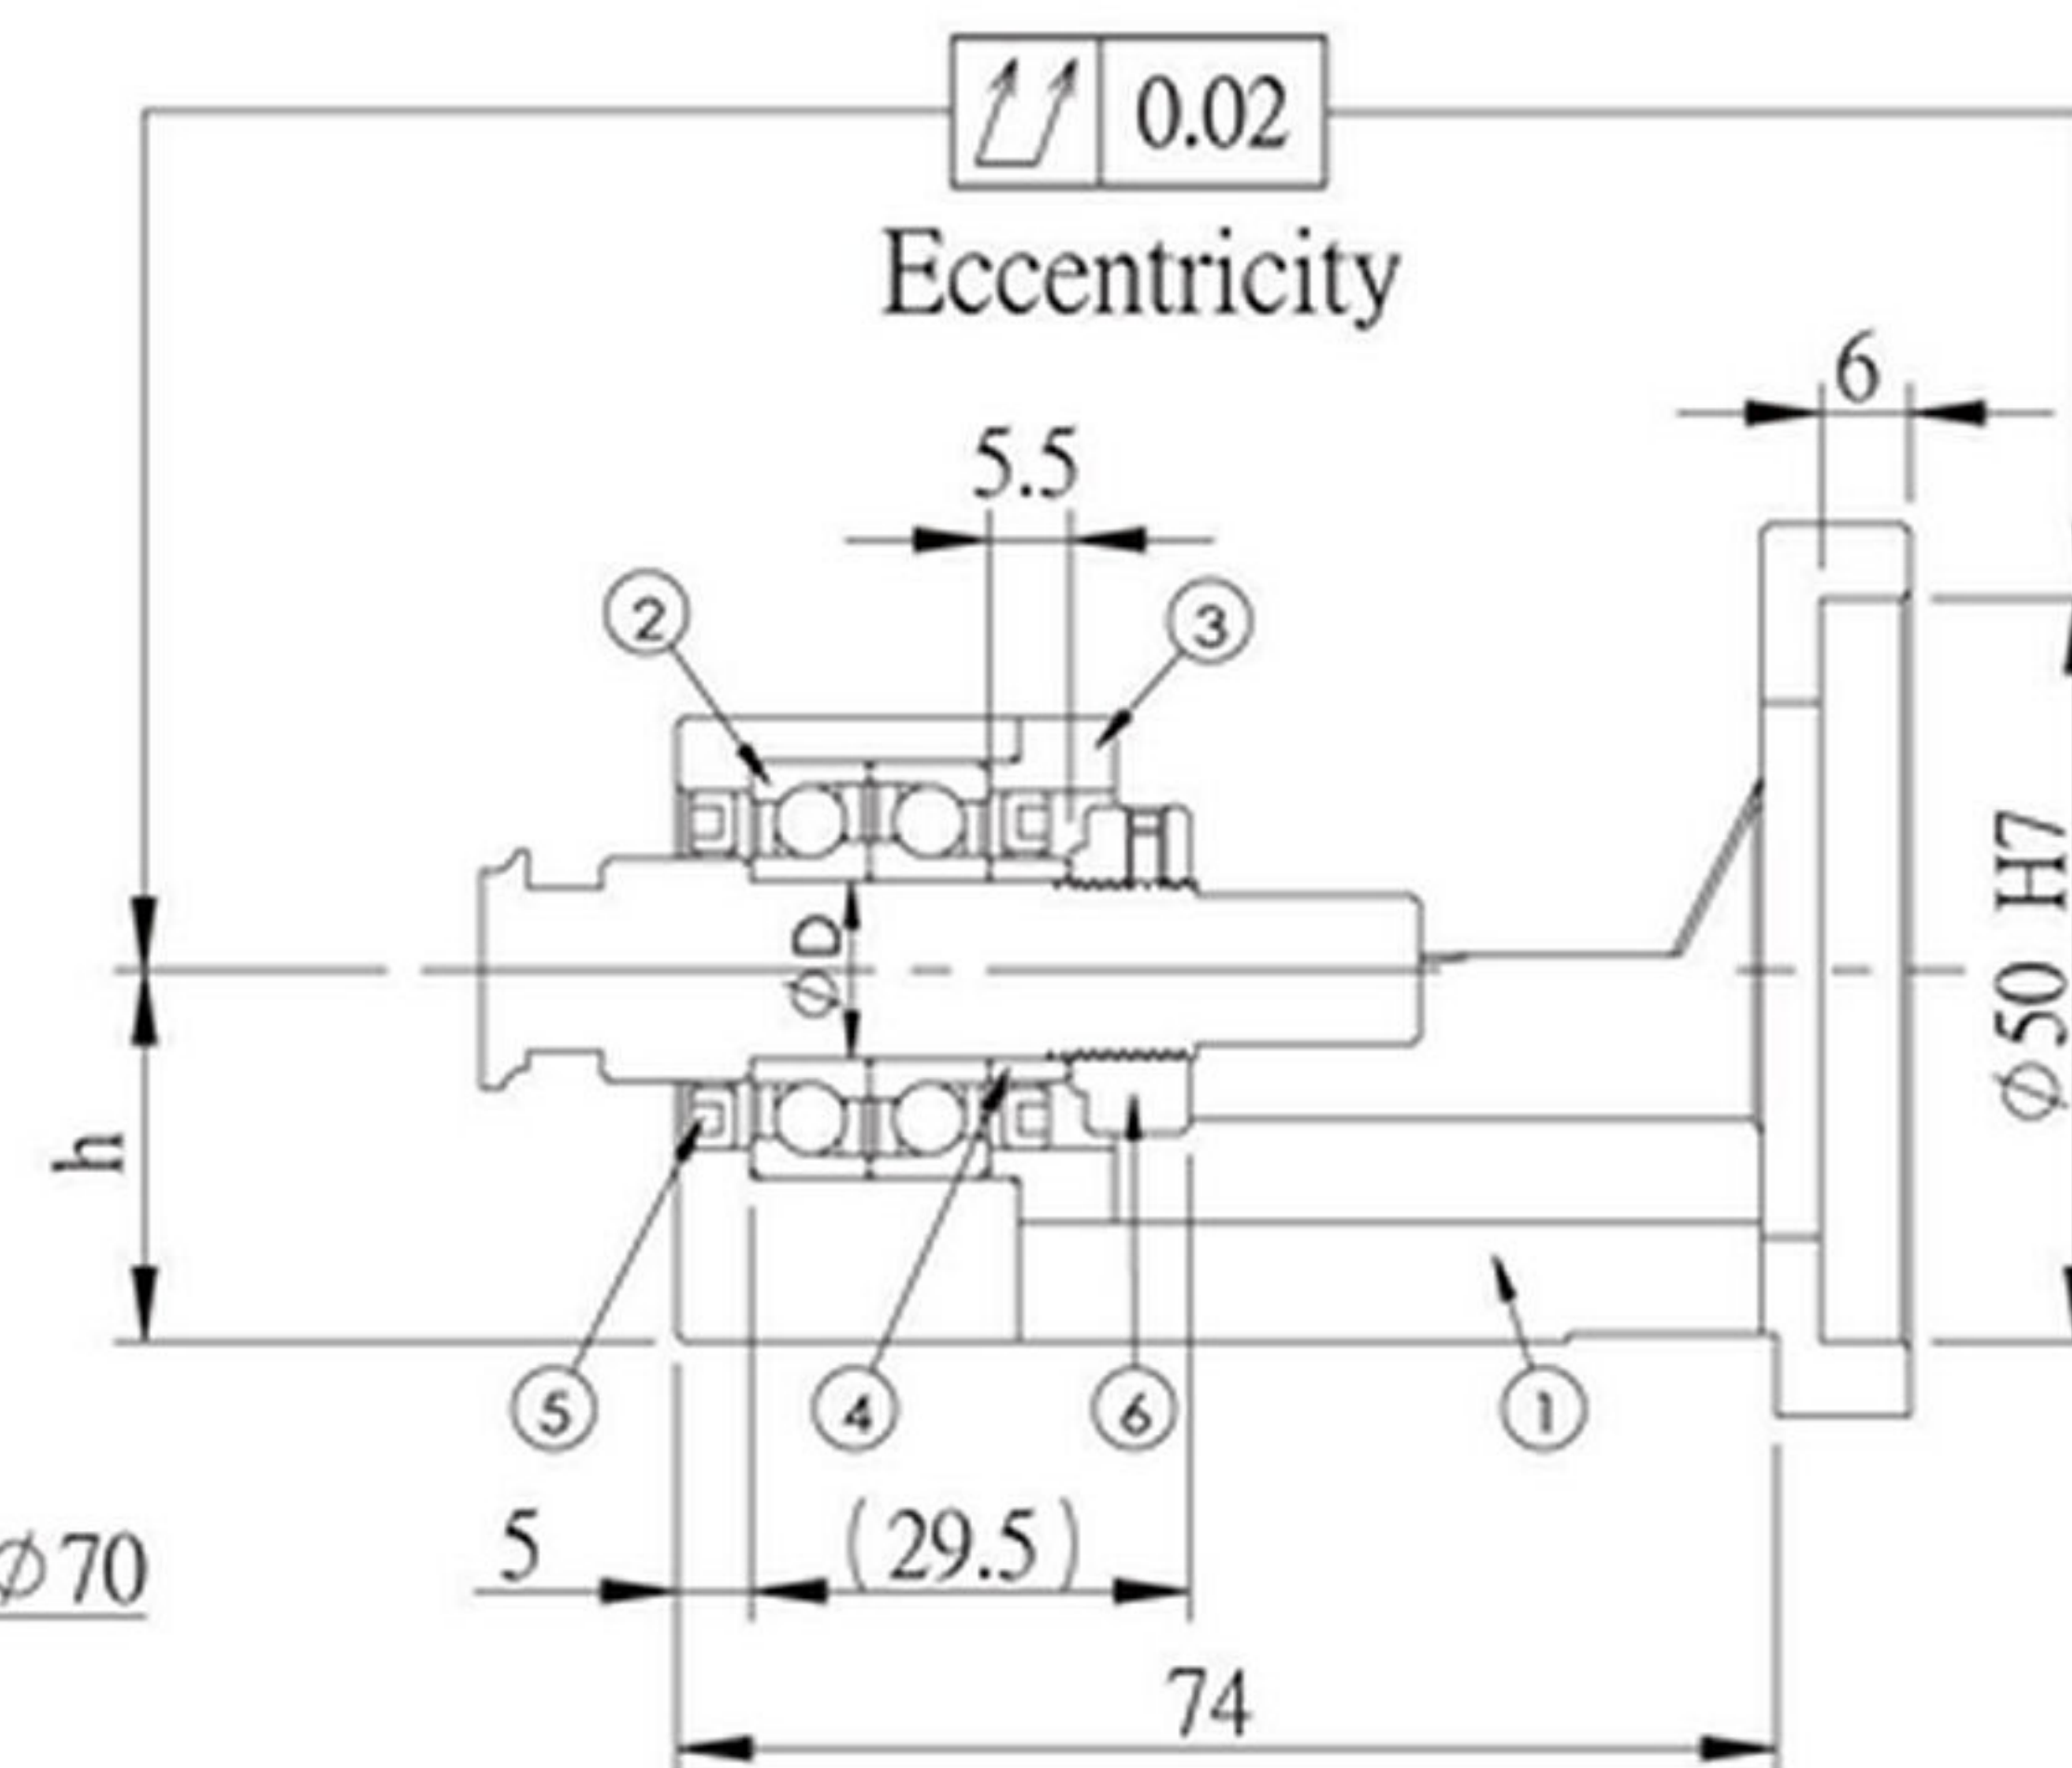


MBCF10

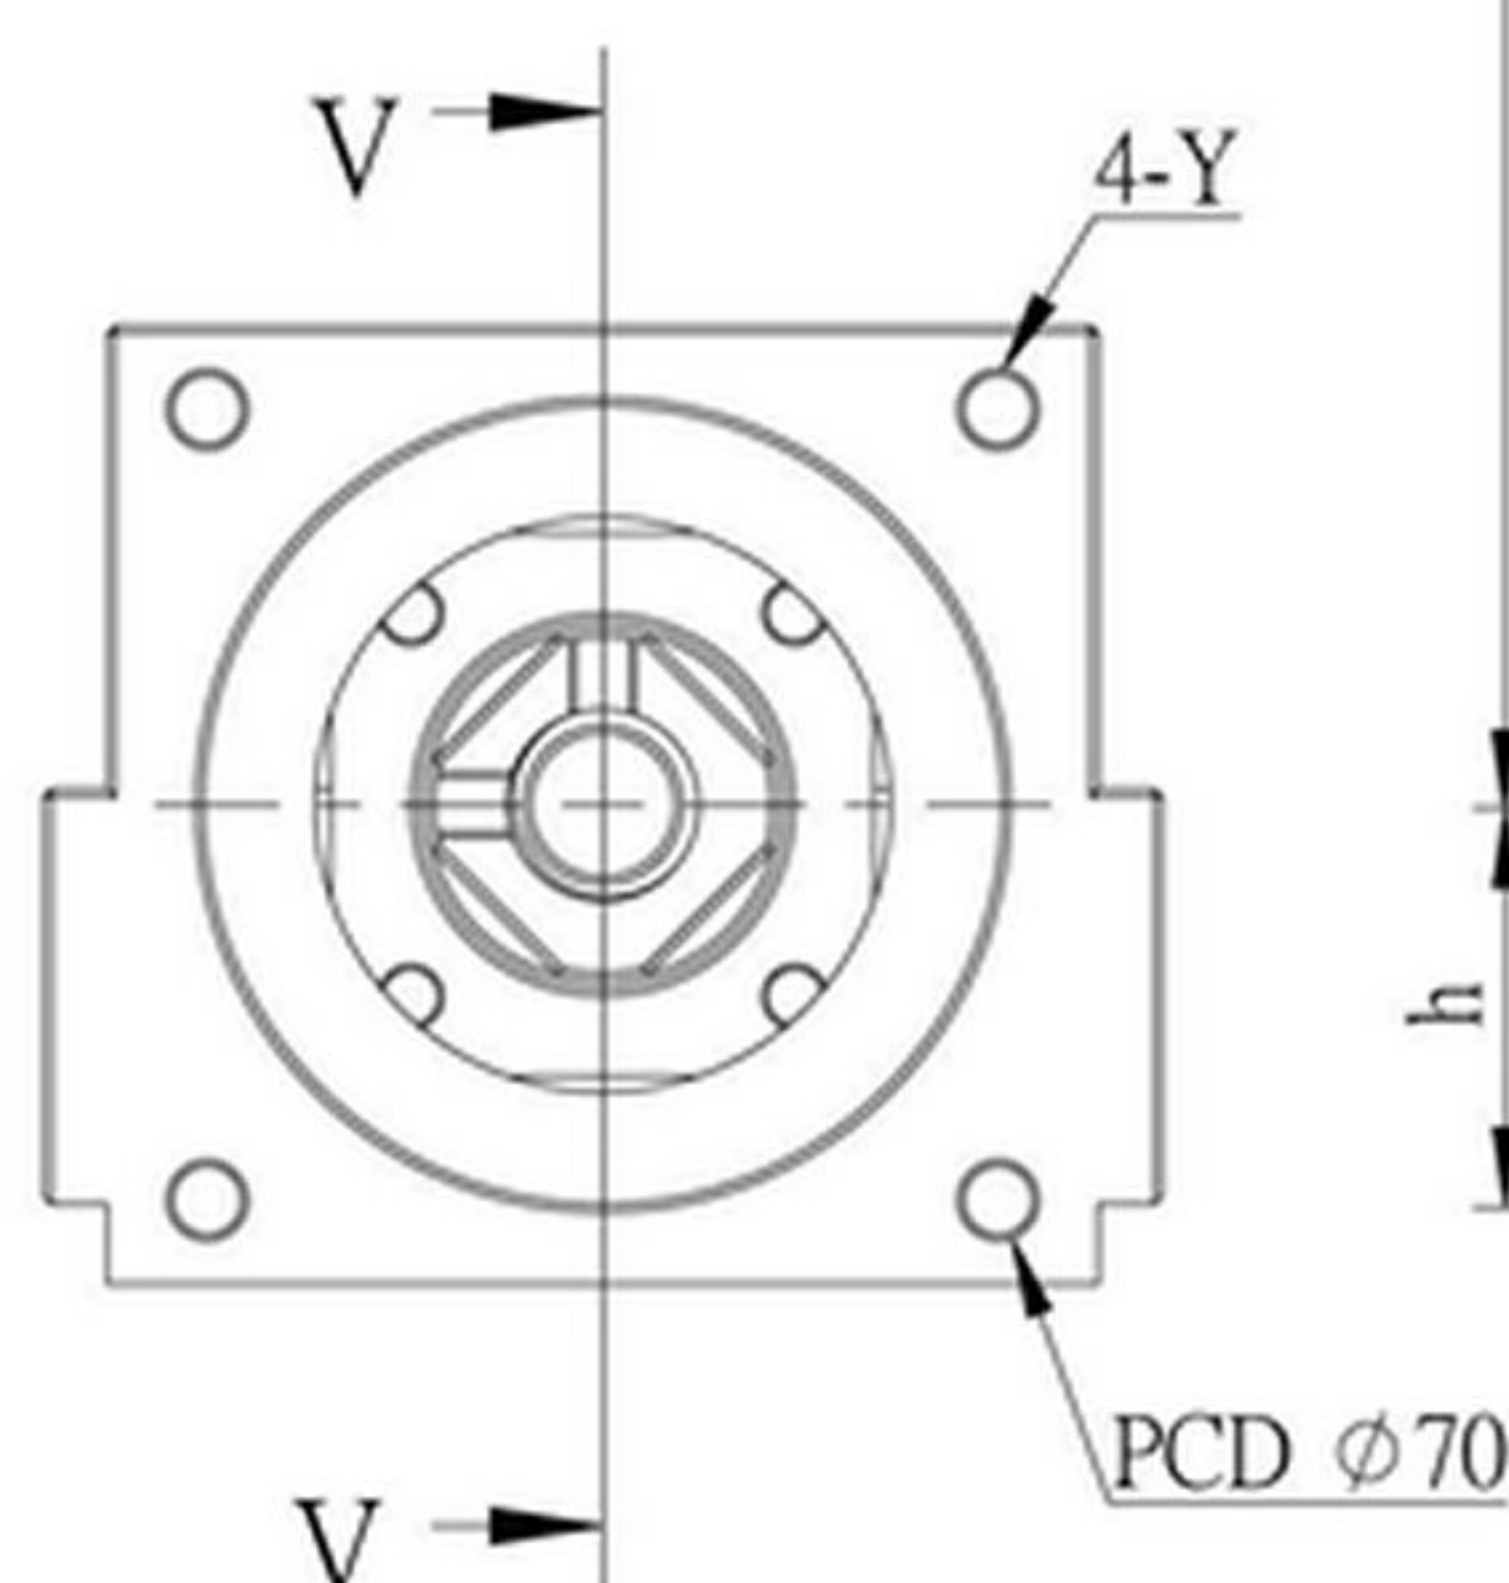

Surface treatment:
Black Oxide
/
Electroless Nickel Plating

No.	Part name	Qty
1	Housing	1
2	Bearing MBC*10 with bearings 7000	1 set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

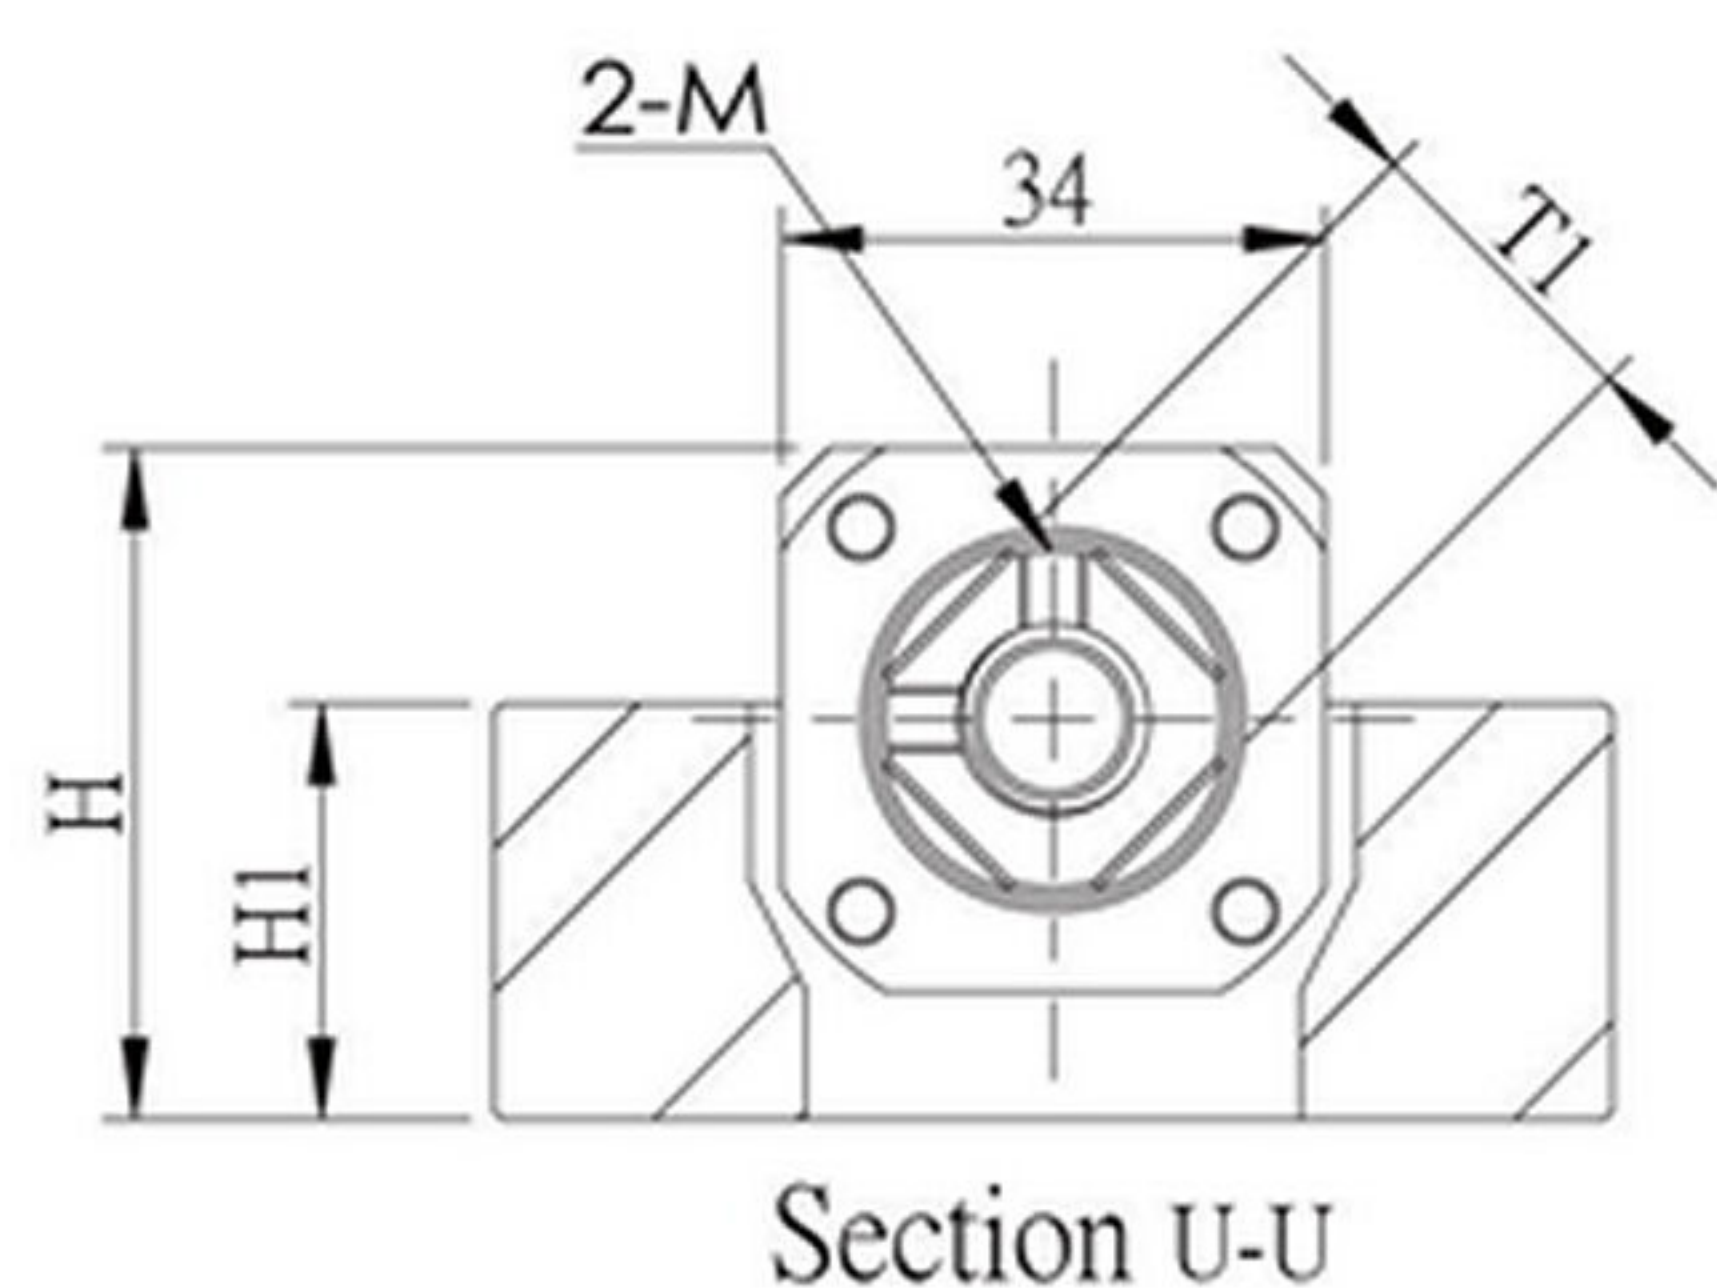

Unit : mm

Model No.	B	P	T	H	H1	h ± 0.02	ϕD	T1	M	Y	S	Q	Weight (Kgs)	Support unit Supported-side	Suggest Coupling
MBCF10-D	63	50	31.5	37	21	20	10	□16	M3	M5	6.6	11	-	LF12	SGS 34C
MBCF10-DP										M4			-	LFA 15	

Note :

1. The matched bearing in the support unit has already done the preload.
2. The matched P5 bearings are assembled in DF way, which is the most suitable for ball screw use.