


Lineární vedení

Typ Q1

2. QEW-CC / QEW-SC

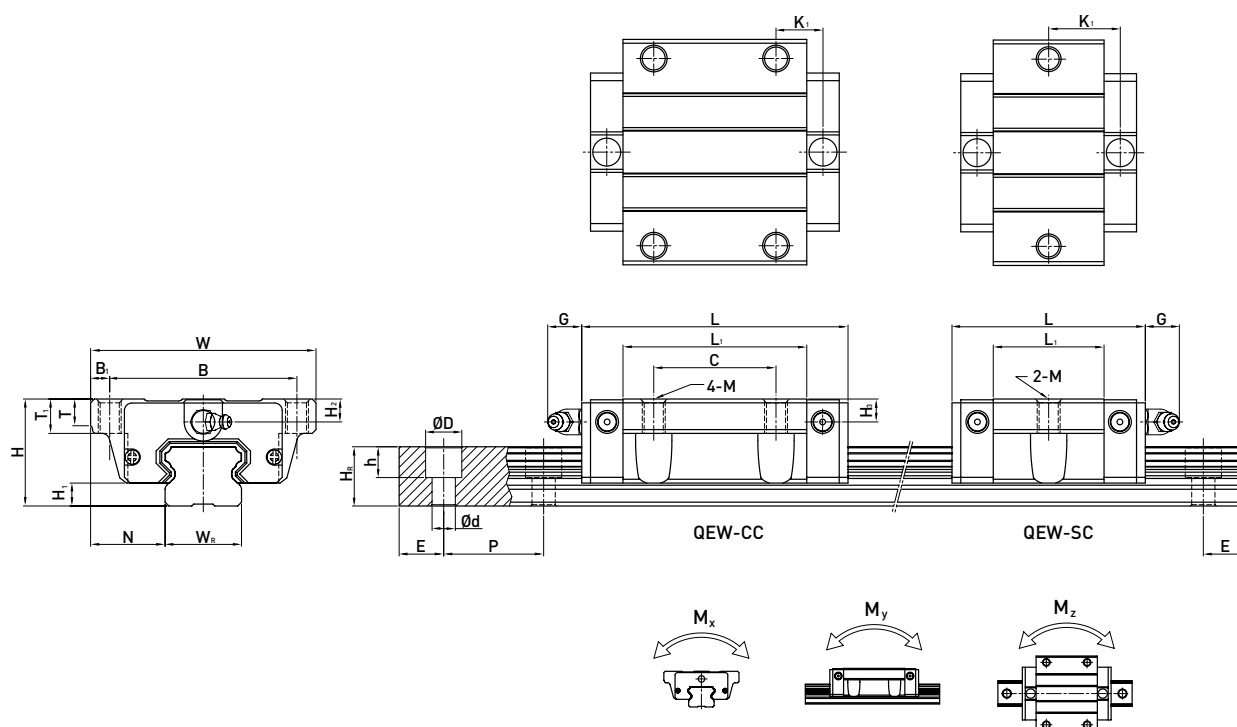

Typ	Montážní rozměry (mm)			Rozměry vozíku (mm)														Rozměry kolejnic (mm)										Šrouby pro kolejnici [mm]	Dynamická únosnost C _{dyn} [N]	Statická únosnost C ₀ [N]	Statický moment			Hmotnost	
				H	H ₁	N	W	B	B ₁	C	L ₁	L	K1	G	M×L	T	T ₂	H ₂	H ₃	W _R	H _R	D	h	d	P	E	M _x [Nm]				M _y [Nm]	M _z [Nm]	Vozík [kg]	Kolejnice [kg/m]	
QEW15SC	24	4,0	18,5	52	41	5,5	—	23,1	40,1	14,80	5,7	M5	5,0	7	5,5	6,0	15	12,5	6,0	4,5	3,5	60	*	M3×16	8560	8790	70	30	30	0,12	1,25				
QEW15CC							26	39,8	56,8	10,15															—	—	—	—	—	—		—	—	—	—
QEW20SC	28	6,0	19,5	59	49	5,0	—	29,0	50,0	18,75	12,0	M6	7,0	9	6,0	6,5	20	15,5	9,5	8,5	6,0	60	*	M5×16	11570	12180	130	50	50	0,19	2,08				
QEW20CC							32	48,1	69,1	12,30															—	—	—	—	—	—		—	—	—	—
QEW25SC	33	6,2	25,0	73	60	6,5	—	35,5	60,1	21,90	12,0	M8	7,5	10	8,0	8,0	23	18,0	11,0	9,0	7,0	60	*	M6×20	18240	18900	220	100	100	0,34	2,67				
QEW25CC							35	59,0	83,6	16,15															—	—	—	—	—	—		—	—	—	—
QEW30SC	42	10,0	31,0	90	72	9,0	—	41,5	67,5	25,75	12,0	M10	7,0	10	8,0	9,0	28	23,0	11,0	9,0	7,0	80	*	M6×25	26270	27820	400	180	180	0,61	4,35				
QEW30CC							40	70,1	96,1	20,05															—	—	—	—	—	—		—	—	—	—

* Pokud zákazník neurčí jinak, oba konce E₁ a E₂ jsou symetrické v rozmezí E_{1/2} min. a E_{1/2} max. - viz tab. 2.19.