

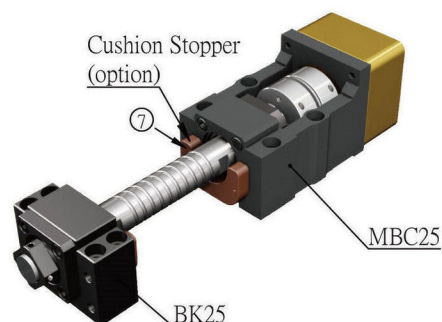


MBC25


Fig→Fixed+Fixed

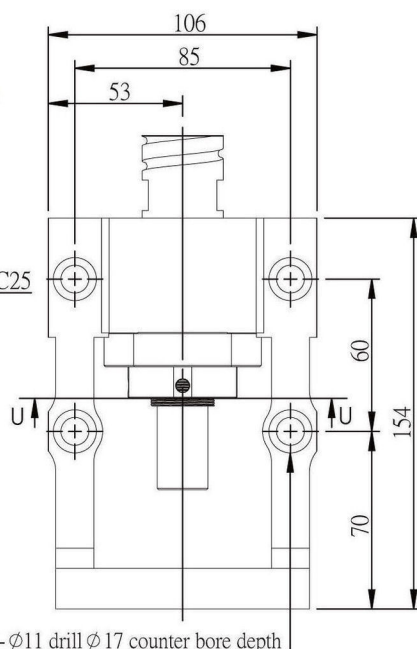



Fig→Fixed+Supported

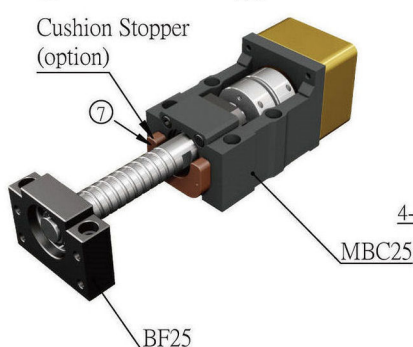

Surface treatment: Black Oxide

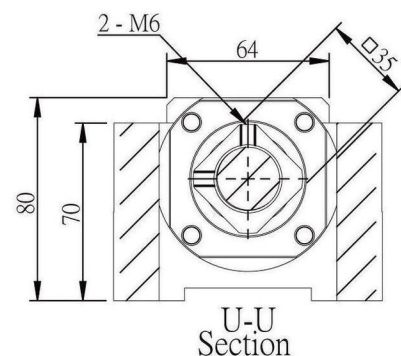

No.	Part name	Qty
1	Housing	1
2	Bearing Bearing 7205	1 set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

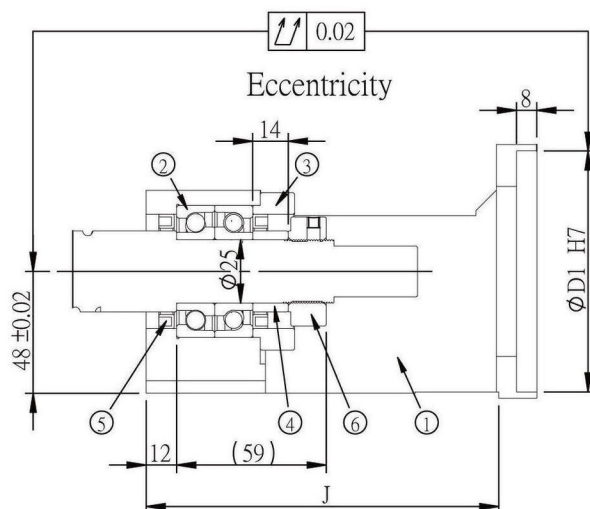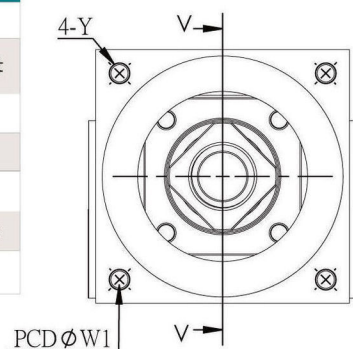

Unit : mm

Model No.	D1	W1	Y	J	Weight (Kgs)	Support unit	Suggest Coupling
						Supported-side	
MBC25-X	80	100	M6	flat	-	BK25 BF25	SGS 57C SGS 65C
MBC25-Y	95	115	M8	139			
MBC25-YP			M6				

Note :

1.Bearings made preload , and axial clearance is 0 mm.

2.DF type, P5 grade preloaded duplex angular contact ball bearing suitable for ballscrew use.