


Kuličkové šrouby Příslušenství

3.3.2 Pevné uložení radioaxiálním ložiskem, typ FK


Pevné uložení obsahuje:

- Ložiskový domeček z oceli včetně kuličkového ložiska s kosoúhlým stykem
- 2 ks distančních kroužků
- Radiální pojistná matice

FK08

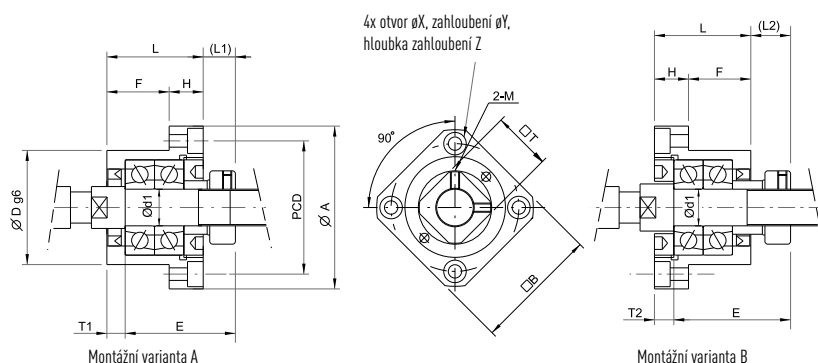

FK10 - FK30

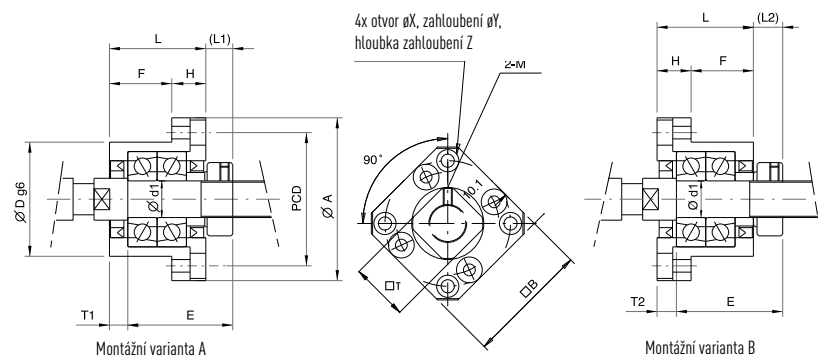

Typ	d1	L	H	F	E	Dg6	A	PCD	B	L1	T1	L2	T2	X	Y	Z	M	T	Opraco- vání	Ložís- ko
FK 08	8	23	9	14	26,0	28	43	35	35	7,0	4	10	7	3,4	6,5	4	M3	14	E2 - 08	708
FK 10	10	27	10	17	29,5	34	52	42	42	7,5	5	8,5	6	4,5	8,0	4	M4	16	E2 - 10	7000 A
FK 12	12	27	10	17	29,5	36	54	44	44	7,5	5	8,5	6	4,5	8,0	4	M4	19	E2 - 12	7001 A
FK 15	15	32	15	17	36,0	40	63	50	52	10,0	6	12	8	5,5	9,5	6	M4	22	E2 - 15	7002 A
FK 17	17	45	22	23	47,0	50	77	62	61	11,0	9	14	12	6,6	11,0	10	M4	24	E2 - 17	7203 A
FK 20	20	52	22	30	50,0	57	85	70	68	8,0	10	12	14	6,6	11,0	10	M4	30	E2 - 20	7204 A
FK 25	25	57	27	30	60,0	63	98	80	79	13,0	10	20	17	9,0	15,0	13	M5	35	E2 - 25	7205 A
FK 30	30	62	30	32	61,0	75	117	95	93	11,0	12	17	18	11,0	17,5	15	M6	40	E2 - 30	7206 A

Neoznačené rozměry v [mm]