

HIWIN®

Motion Control & Systems



Direct Drive Rotary Tables

Motors, Drives & Accessories

Direct Drive Rotary Tables

HIWIN direct drive rotary tables are ready-to-install rotary axes that can be incorporated directly into the machine concept without the need for any design work. Thanks to the range of encoder interfaces provided, the direct drive rotary tables can be integrated easily into all commercially available machine control systems and thus all existing machine concepts.

Direct Drive Rotary Tables

Contents

Contents

1	Product overview	7
2	General information	8
2.1	Properties of direct drive rotary tables	8
2.2	Design of direct drive rotary tables	8
3	HIWIN RAB tilting axes	9
3.1	Properties of RAB tilting axes	9
3.2	Specifications of RAB tilting axes	9
3.3	Dimensions of RAB tilting axes	10
4	HIWIN RAS tilting axes	12
4.1	Properties of RAS tilting axes	12
4.2	Specifications of RAS tilting axes	12
4.3	Dimensions of RAS tilting axes	13
5	HIWIN RCV rotary tables	16
5.1	Properties of RCV rotary tables	16
5.2	Specifications of RCV rotary tables	16
5.3	Dimensions of RCV rotary tables	17
6	HIWIN RCH rotary tables	19
6.1	Properties of RCH rotary tables	19
6.2	Specifications of RCH rotary tables	19
6.3	Dimensions of RCH rotary tables	20
7	Selection tables for direct drive rotary tables	21
8	Project planning sheet for direct drive rotary tables	22

Direct Drive Rotary Tables

Product overview


1. Product overview



HIWIN RAB tilting axes

[Page 9](#)

- Heavy-duty rotary and tilting axis
- Swivel drive on both sides

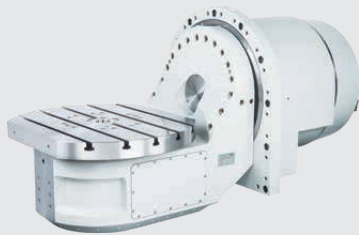

HIWIN RAS tilting axes

[Page 12](#)

- Compact rotary and tilting axis
- Swivel drive on one side



HIWIN RCV rotary tables

[Page 16](#)

- Vertical rotary table



HIWIN RCH rotary tables

[Page 19](#)

- Horizontal rotary table

Direct Drive Rotary Tables

General information

2. General information


2.1 Properties of direct drive rotary tables

HIWIN direct drive rotary tables are ready-to-install rotary axes that can be incorporated directly into the machine concept without the need for any design work. The maintenance-free direct drives they use ensure that the rotary axes deliver high-torque performance with exceptional accuracy. Thanks to the range of encoder interfaces provided, the direct drive rotary tables can be integrated easily into all commercially available machine control systems and thus all existing machine concepts.

Advantages

- Ready to install
- Maintenance-free
- Highly precise
- Extremely durable
- Tilt-resistant design
- Large-diameter turntable

2.2 Design of direct drive rotary tables

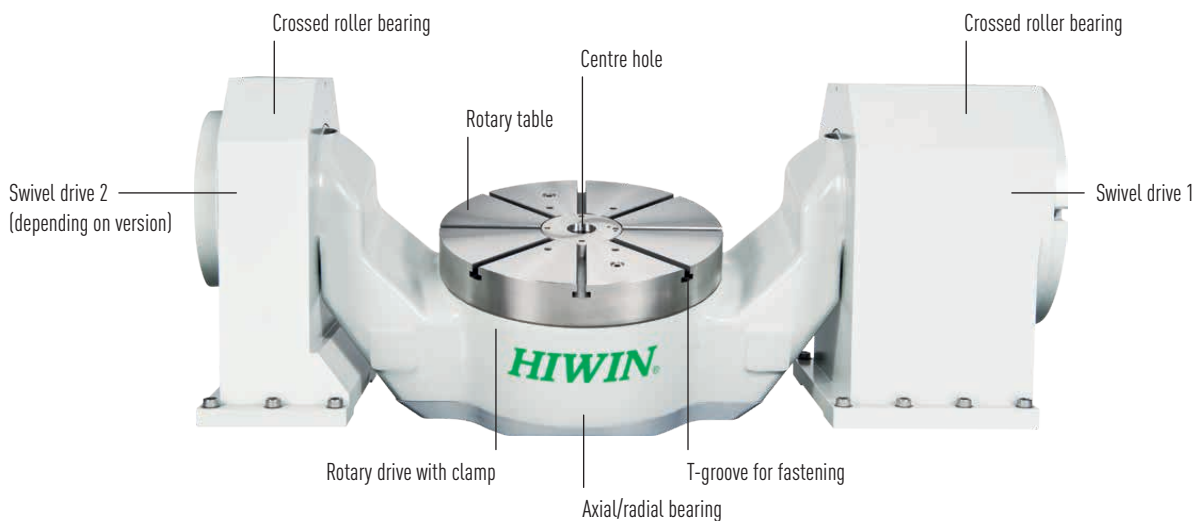

3. HIWIN RAB tilting axes

3.1 Properties of RAB tilting axes

RAB tilting axes are directly driven, maintenance-free precision axes. They use water-cooled torque motors from the TMRW series, guaranteeing high levels of acceleration and torque. Equipped with various high-resolution encoders, the tilting axes achieve accuracies of just a few arc seconds and can be integrated into all standard control concepts. Featuring crossed roller and axial/radial bearings, the tilt-resistant mechanical design is able to accommodate maximum loads.



Key features:



- Plug-and-play tilting axis ready for installation
- Maintenance-free direct drives in all axes
- High acceleration, torque and accuracy
- Tilt-resistant mechanical design with large diameter
- Swivel axis with precision crossed roller bearings
- Rotary axis with extremely rigid axial/radial bearing
- Integrated clamp

Typical applications:

- 5-axis milling machines
- Laser processing machines

3.2 Specifications of RAB tilting axes

Table 3.1 RAB technical data


	Unit	RAB-400		RAB-500		RAB-630		RAB-800	
									
Axis		Rotary axis	Swivel axis ±120°	Rotary axis	Swivel axis ±120°	Rotary axis	Swivel axis ±120°	Rotary axis	Swivel axis ±120°
Drive motor		TMRWA5	TMRWAA	TMRWA7	TMRWAF	TMRWA7	TMRWAF	TMRWDF	TMRWDF
Max. speed	rpm	90	60	100	60	100	60	90	60
Continuous torque	Nm	430	860	600	1,290	600	2,580	2,200	4,400
Peak torque	Nm	810	1,600	1,100	2,400	1,100	4,800	3,900	7,800
Clamp		Pneumatic (6 bar)							
Clamp holding torque	Nm	2,400	3,240	2,400	4,800	2,400	4,800	4,200	8,400
Accuracy	arc sec	2.5/5.0/15.0							
Table diameter	mm	400		500		630		800	
Centre of swivel axis	mm	300		350		250		325	
Table height	mm	300		300		150		225	
T-groove width	mm	14 H8							
Weight	kg	800		1,000		1,200		2,200	
Max. load	kg	350		850		850		1,200	

Direct Drive Rotary Tables


HIWIN RAB tilting axes

3.3 Dimensions of RAB tilting axes


RAB-400 dimensions

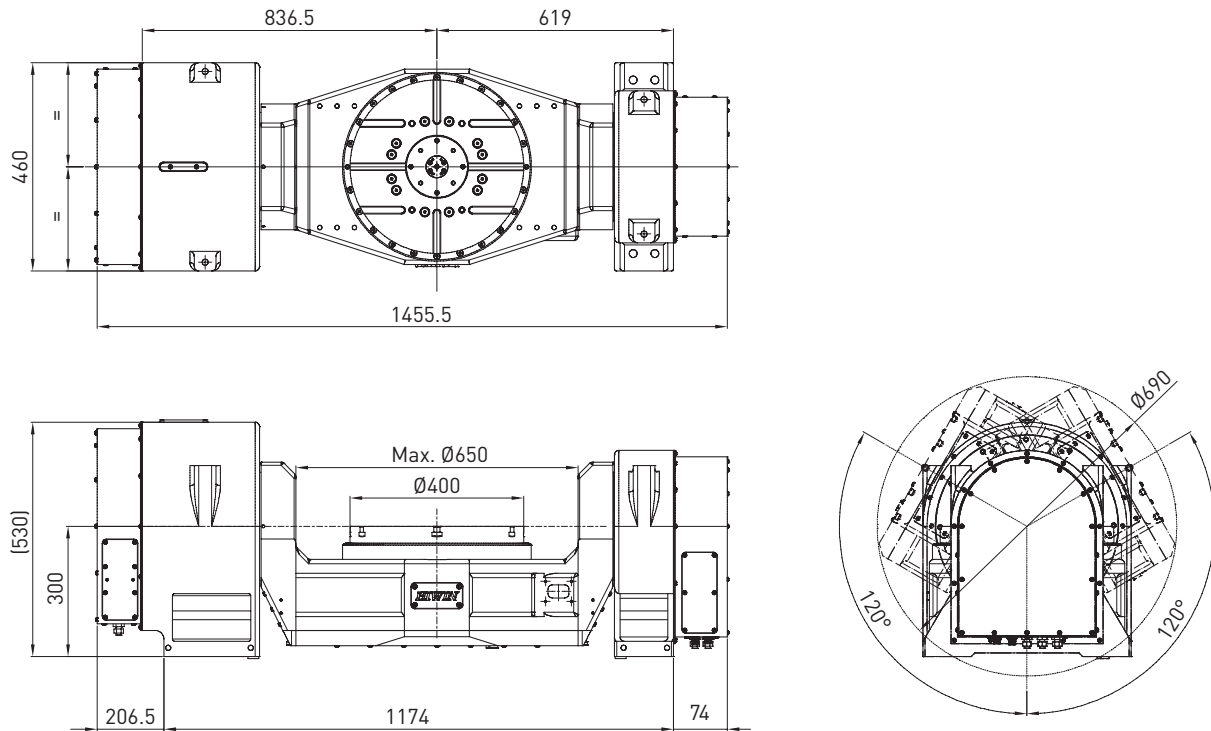


RAB-500 dimensions

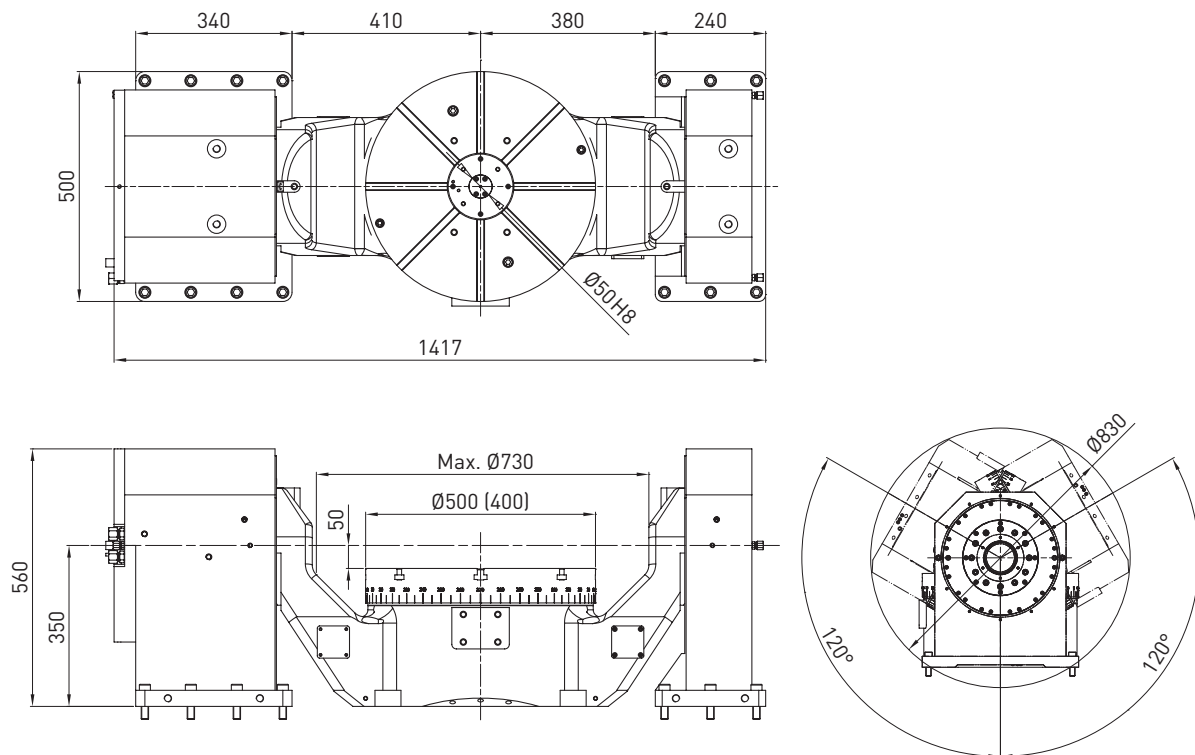

RAB-630 dimensions

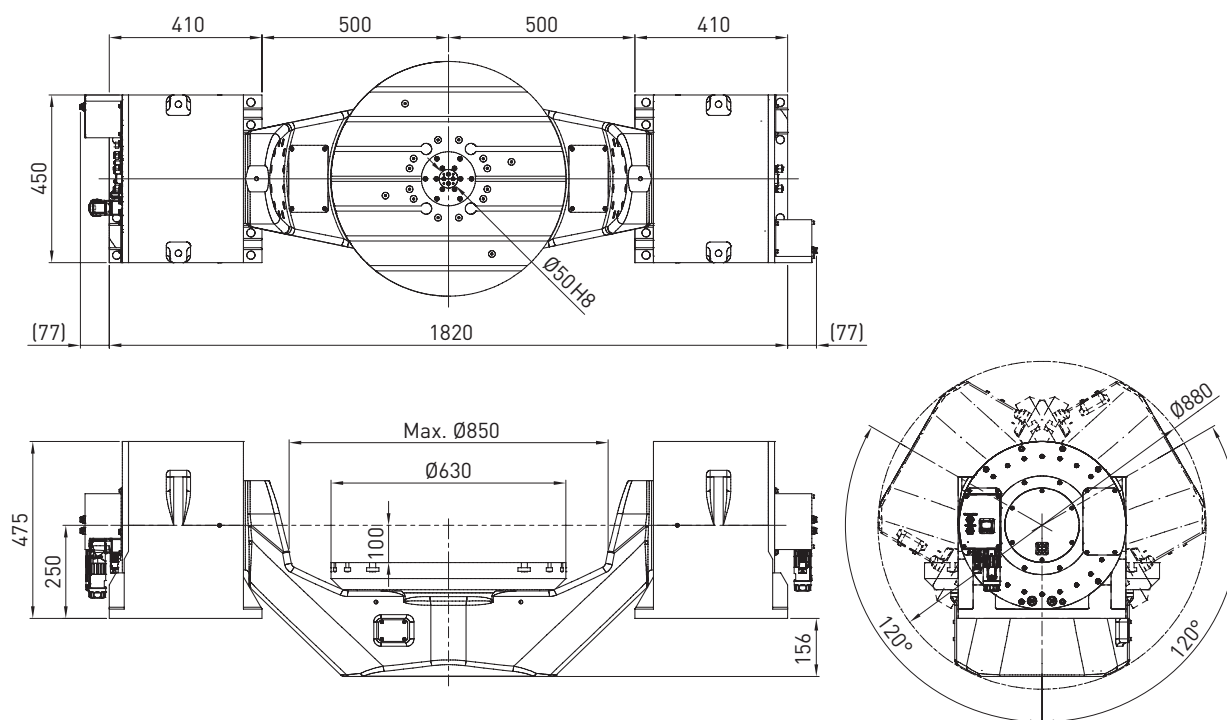

RAB-800 dimensions

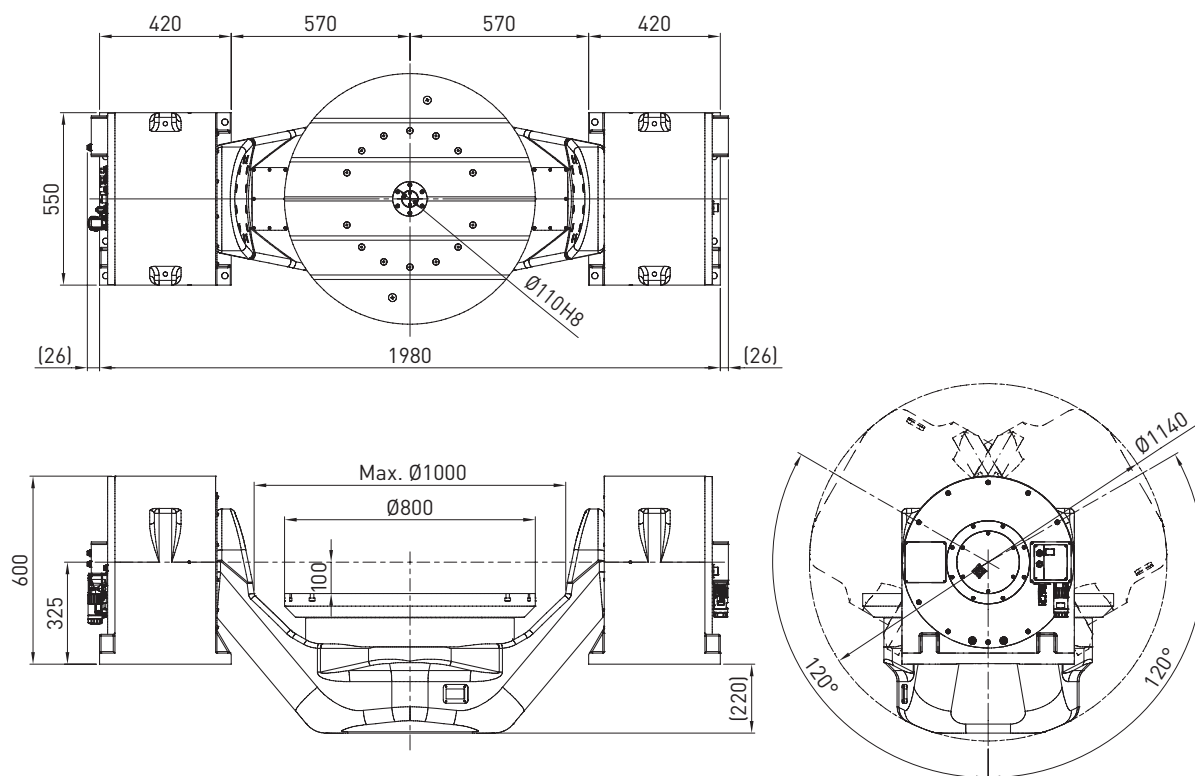

Direct Drive Rotary Tables

HIWIN RAS tilting axes

4. HIWIN RAS tilting axes

4.1 Properties of RAS tilting axes


RAS tilting axes are directly driven, maintenance-free precision axes. They use water-cooled torque motors from the TMRW series, guaranteeing high levels of acceleration and torque. Equipped with various high-resolution encoders, the tilting axes achieve accuracies of just a few arc seconds and can be integrated into all standard control concepts. Featuring crossed roller and axial/radial bearings, the tilt-resistant mechanical design is able to accommodate maximum loads.

Key features:

- Plug-and-play tilting axis ready for installation
- Maintenance-free direct drives in all axes
- High acceleration, torque and accuracy
- Tilt-resistant mechanical design with large diameter
- Swivel axis with precision crossed roller bearings
- Rotary axis with extremely rigid axial/radial bearing
- Integrated clamp



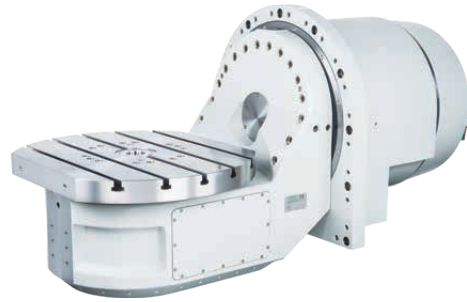

Typical applications:

- 5-axis milling machines
- Laser processing machines




4.2 Specifications of RAS tilting axes

Table 4.1 RAS technical data


	Unit	RAS-170		RAS-200		RAS-200-SP		RAS-250		RAS-320		RAS-650	
													
Axis		Rotary axis	Swivel axis $\pm 120^\circ$	Rotary axis	Swivel axis $\pm 120^\circ$	Rotary axis	Swivel axis $\pm 120^\circ$	Rotary axis	Swivel axis $\pm 120^\circ$	Rotary axis	Swivel axis $\pm 120^\circ$	Rotary axis	Swivel axis $\pm 120^\circ$
Drive motor		TMRW23	TMRW4A	TMRW43	TMRW4A	TMRW43-SB	TMRW4A	TMRW73	TMRW77	TMRW4A	TMRWAL	TMRWA7	TMRWDF
Max. speed	rpm	200	100	200	60	2,000	100	200	80	150	60	100	60
Continuous torque	Nm	35	205	63.5	205	27.9	205	145	335	205	1,900	600	2,000
Peak torque	Nm	66.5	390	120	390	52.7	390	275	640	390	3,360	1,100	3,600
Clamp		Pneumatic (6 bar)											
Clamp holding torque	Nm	250	840	300	840	300	840	600	1,500	840	2,400	2,400	4,200
Accuracy	arc sec	2.5/5.0/15.0											
Table diameter	mm	170		200		200		250		320		650	
Centre of swivel axis	mm	260		280		280		185		235		300	
Table height	mm	280		280		280		185		205		250	
T-groove width	mm	14 H8		12 H8		12 H8		12 H8		14 H8		14 H8	
Weight	kg	250		260		260		300		600		1,300	
Max. load	kg	30		50		50		85		200		300	

4.3 Dimensions of RAS tilting axes

RAS-170 dimensions

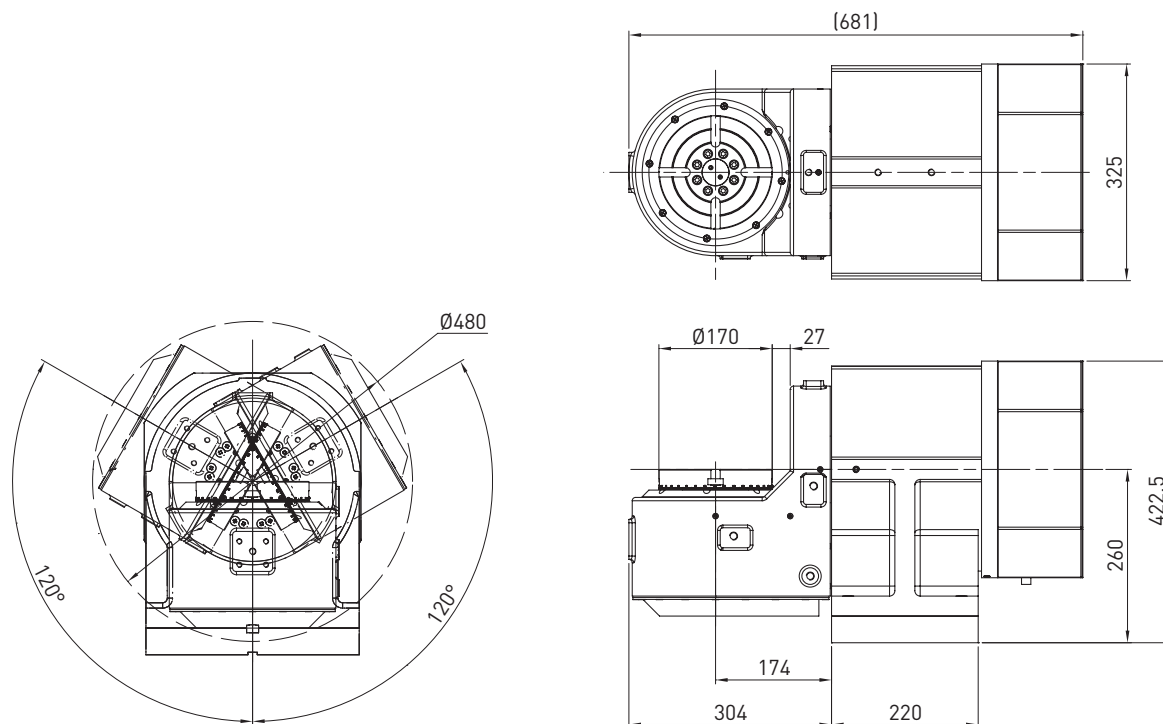


RAS-200/RAS-200-SP dimensions

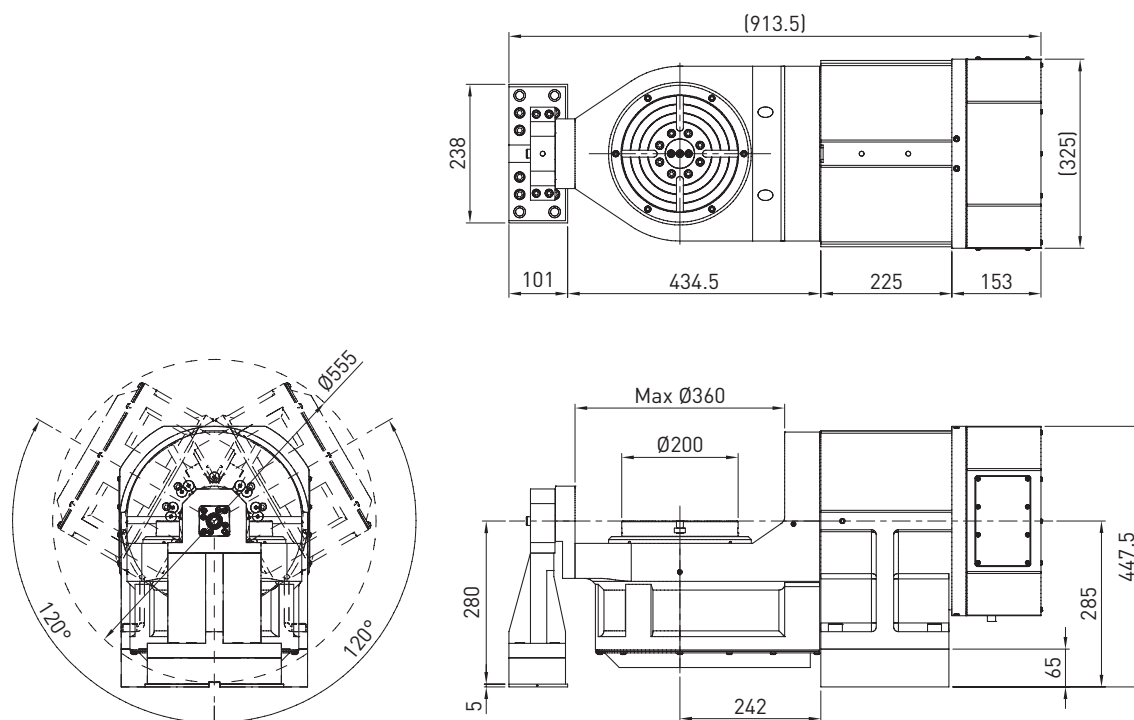


Direct Drive Rotary Tables

HIWIN RAS tilting axes


RAS-250 dimensions

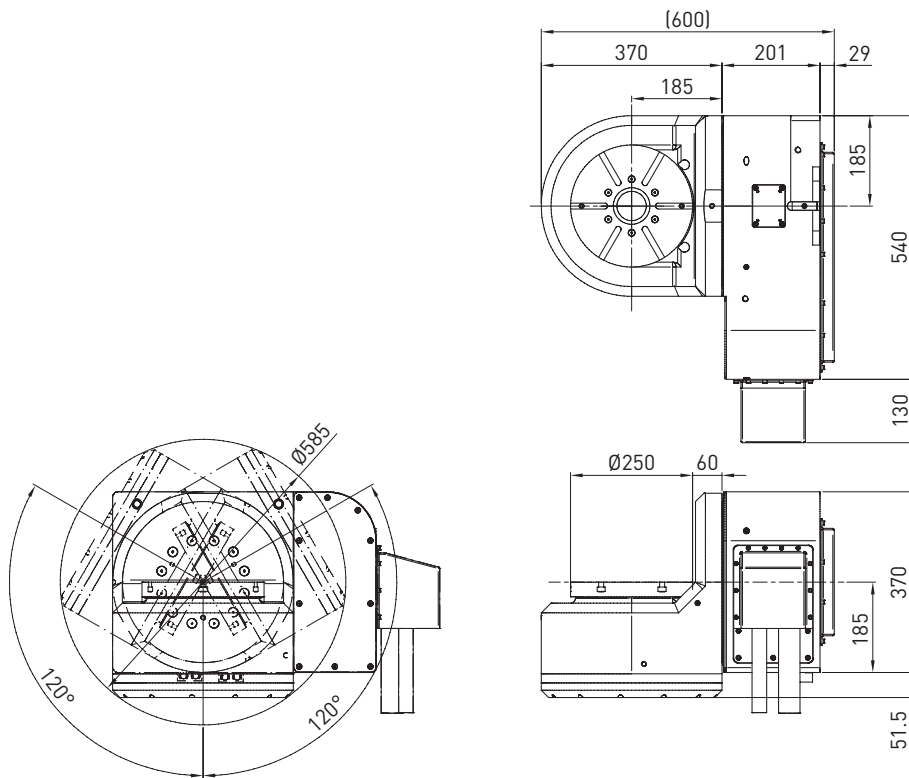

RAS-320 dimensions

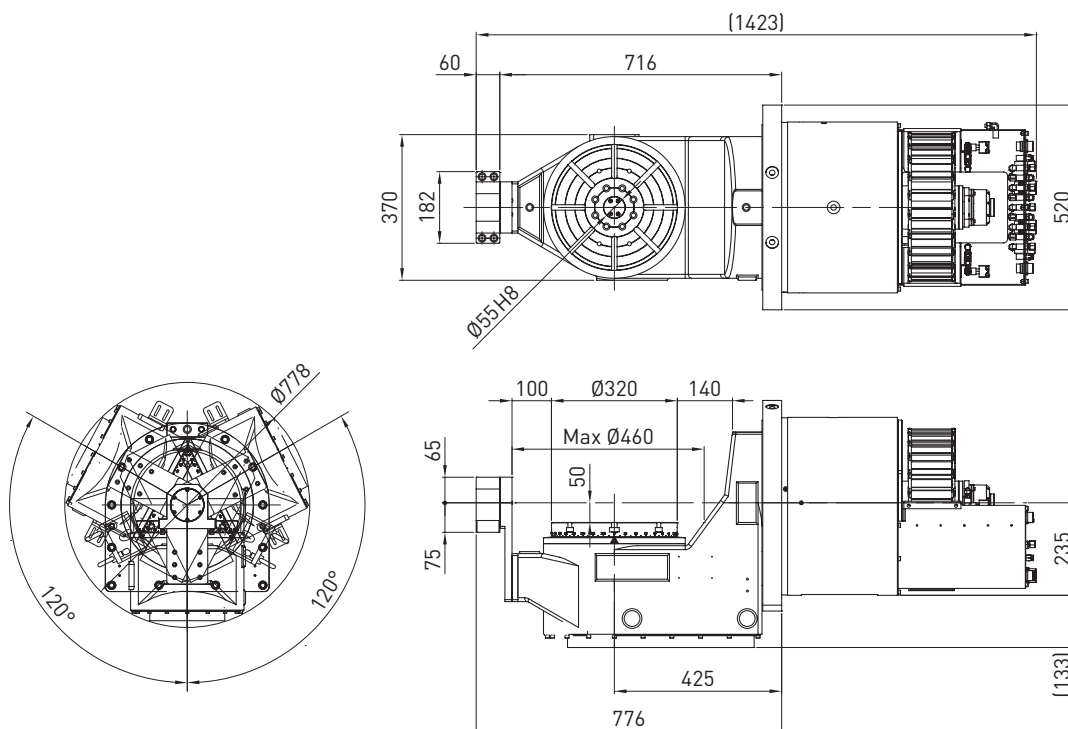

RAS-650 dimensions

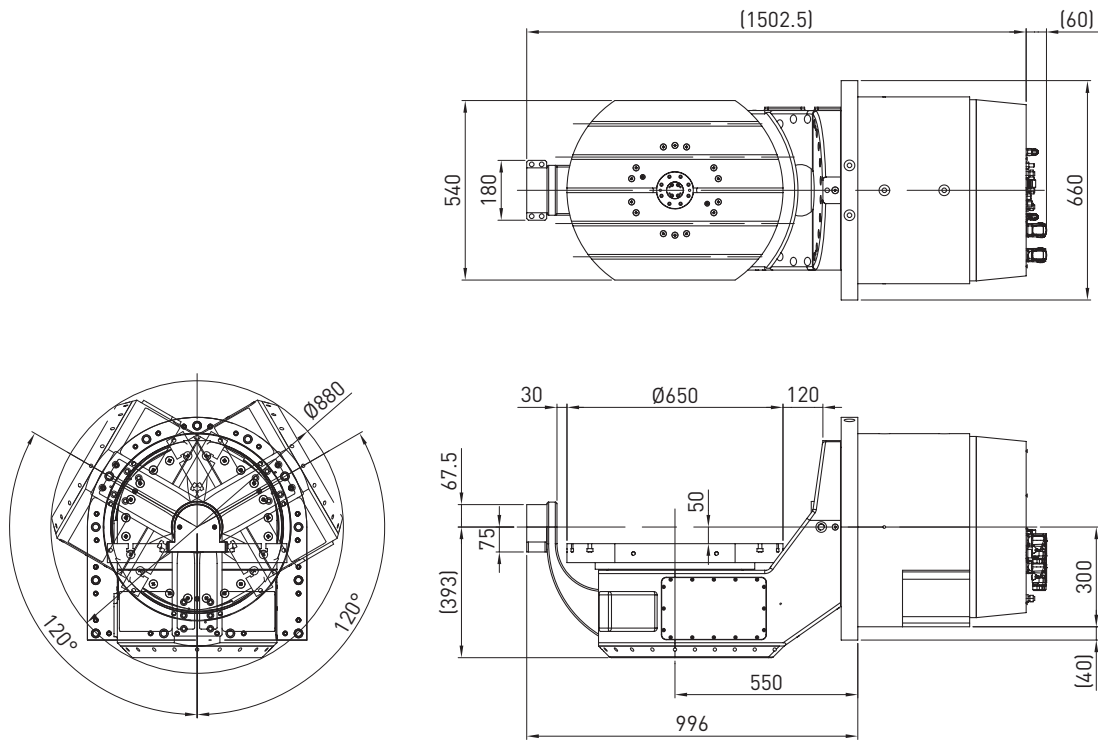

Direct Drive Rotary Tables

HIWIN RCV rotary tables

5. HIWIN RCV rotary tables

5.1 Properties of RCV rotary tables


RCV rotary tables are directly driven, maintenance-free precision axes. They use water-cooled torque motors from the TMRW series, guaranteeing high levels of acceleration and torque. Equipped with various high-resolution encoders, the rotary tables achieve accuracies of just a few arc seconds and can be integrated into all standard control concepts. Featuring crossed roller bearings, the tilt-resistant mechanical design is able to accommodate maximum loads.

Key features:





- Plug-and-play rotary table ready for installation
- Maintenance-free direct drives
- High acceleration, torque and accuracy
- Tilt-resistant mechanical design with large diameter
- Extremely rigid crossed roller bearings
- Integrated clamp
- With option of tailstock as additional support bearing

Typical applications:

- Additional rotary axis in machine tools
- Laser processing machines




5.2 Specifications of RCV rotary tables


Table 5.1 RCV technical data					
	Unit	RCV-125	RCV-170	RCV-250	RCV-320
					
Drive motor		TMRW15	TMRW45	TMRW47	TMRWA5
Max. speed	rpm	400	200	140	90
Continuous torque	Nm	31.3	106	148	430
Peak torque	Nm	59.4	203	280	810
Clamp		Pneumatic (6 bar)			
Clamp holding torque	Nm	100	300	600	900
Accuracy	arc sec	2.5/5.0/15.0			
Table diameter	mm	125	170	250	320
Centre of swivel axis	mm	100	135	160	220
Diameter of hollow shaft	mm	Ø30 × 26L	Ø60	Ø60	Ø60
T-groove width	mm	12 H8	12 H8	12 H8	14 H8
Weight	kg	30	95	150	320
Max. load	kg	20	50	160	250

5.3 Dimensions of RCV rotary tables

RCV-125 dimensions

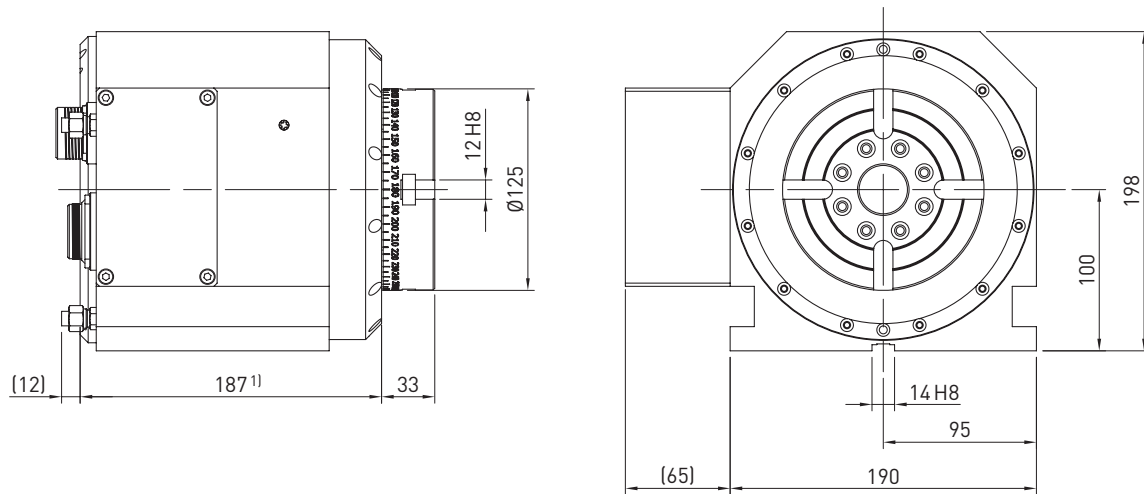

RCV-170 dimensions

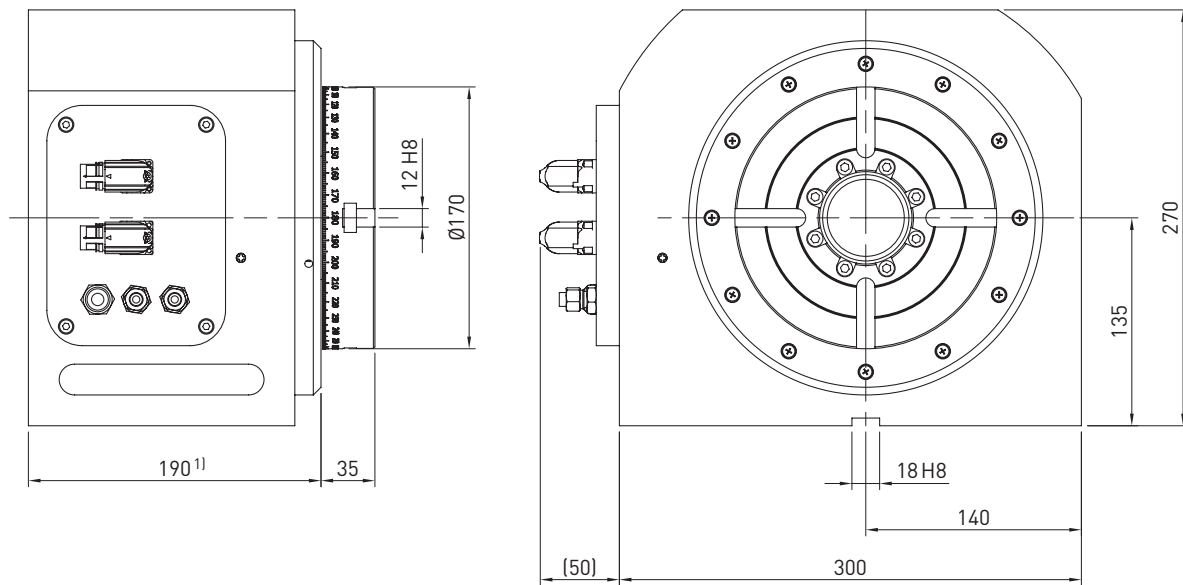


¹⁾ Size varies depending on the choice of distance measuring system


Direct Drive Rotary Tables

HIWIN RCV rotary tables

RCV-250 dimensions

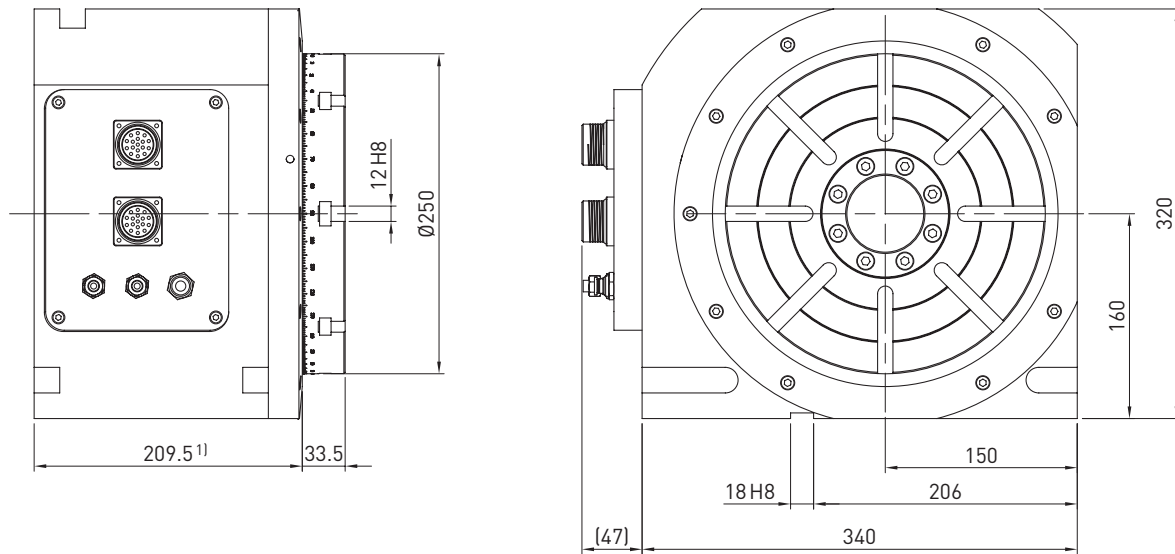

RCV-320 dimensions

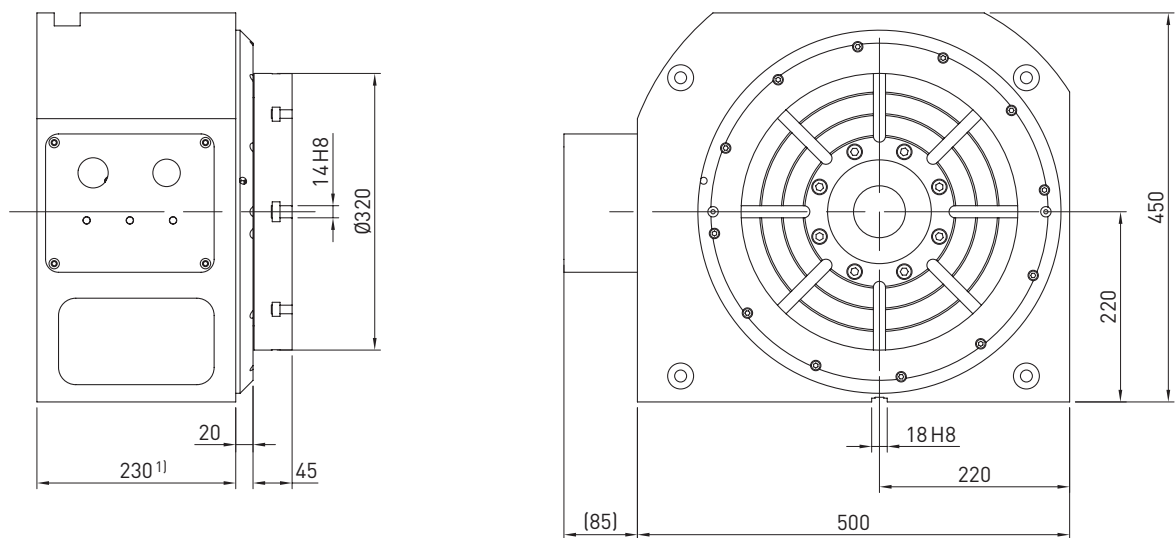

¹⁾ Size varies depending on the choice of distance measuring system

6. HIWIN RCH rotary tables

6.1 Properties of RCH rotary tables

RCH rotary tables are directly driven, maintenance-free precision axes. They use water-cooled torque motors from the TMRW series, guaranteeing high levels of acceleration and torque. Equipped with various high-resolution encoders, the rotary tables achieve accuracies of just a few arc seconds and can be integrated into all standard control concepts. Featuring axial/radial bearings, the tilt-resistant mechanical design is able to accommodate maximum loads.

Key features:

- Plug-and-play rotary table ready for installation
- Maintenance-free direct drives
- High acceleration, torque and accuracy
- Tilt-resistant mechanical design with large diameter
- Extremely rigid axial/radial bearings
- Integrated clamp





Typical applications:

- Horizontal rotary tables in machine tools
- Grinding machines
- Laser processing machines



6.2 Specifications of RCH rotary tables

Table 6.1 RCH technical data


	Unit	RCH-200-SP	RCH-200	RCH-400	RCH-600	RCH-800
						
Drive motor		TMRW43-SB	TMRW43	TMRW7A	TMRWAF	TMRWDF
Max. speed	rpm	2,000	280	115	100	80
Continuous torque	Nm	27.9	63.5	480	1,290	2,000
Peak torque	Nm	52.7	120	910	2,400	3,600
Clamp		Pneumatic (6 bar)		Hydraulic (70 bar)		Pneumatic (6 bar)
Clamp holding torque	Nm	600	600	2,000	3,200	4,200
Accuracy	arc sec	2.5/5.0/15.0				
Table diameter	mm	200	200	400	600	800
Weight	kg	85	85	190	430	750
Max. load	kg	50	100	500	850	1,800

Direct Drive Rotary Tables


HIWIN RCH rotary tables

6.3 Dimensions of RCH rotary tables


RCH-200 dimensions

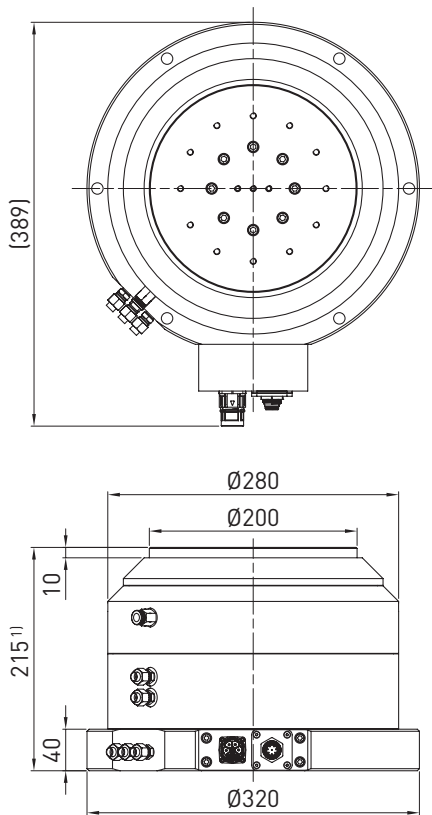


RCH-600 dimensions

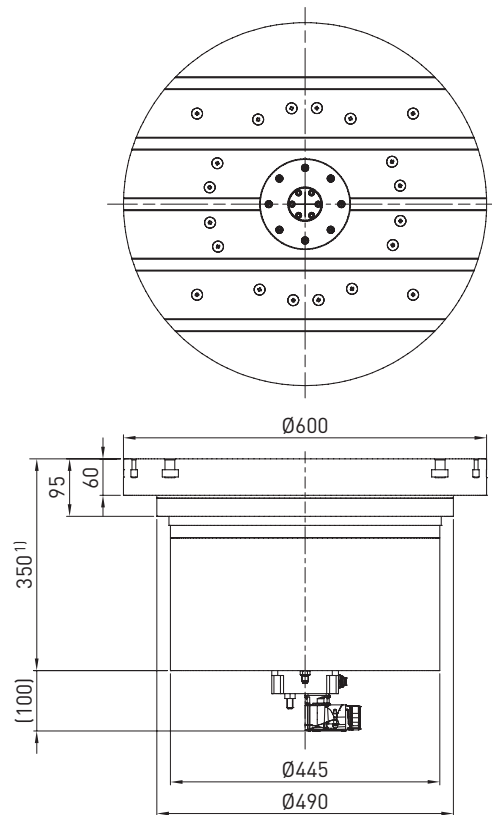

RCH-400 dimensions

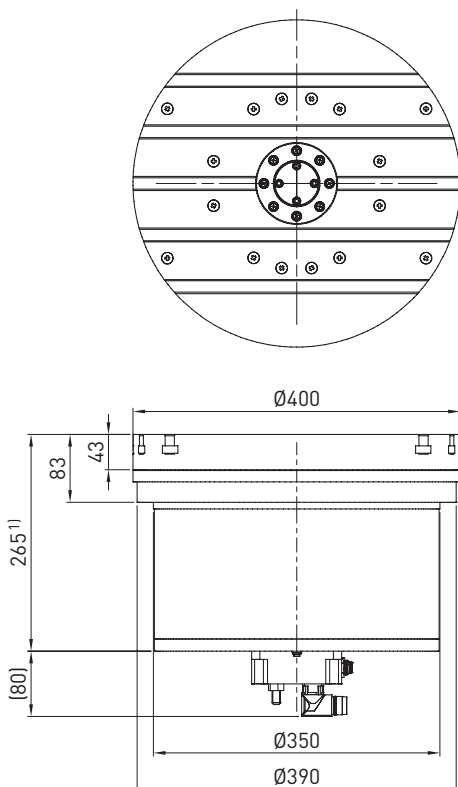

RCH-800 dimensions

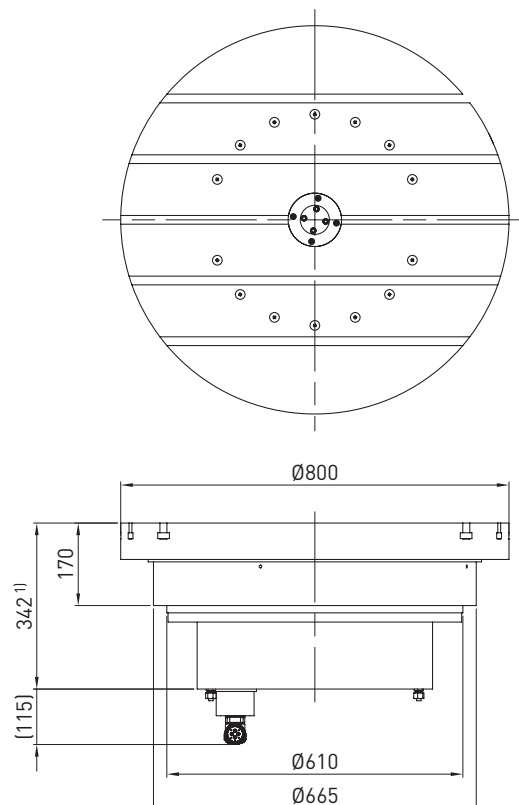

¹⁾ Size varies depending on the choice of distance measuring system

7. Selection tables for direct drive rotary tables

Table 7.1 Control system compatibility with rotary table

		Series			
		RAB	RAS	RCV	RCH
Control system	FANUC	●	●	●	●
	MITSUBISHI	●	●	●	●
	SIEMENS	●	●	●	●
	HEIDENHAIN	●	●	●	●
	NUM	●	●	●	●
	Syntec	●	●	●	●
	Lynuc	●	●	●	●
	Huazhong CNC	●	●	●	●
	GSK	●	●	●	●

● Compatible

Table 7.2 Selecting a distance measuring system for the rotary table

		Series			
		RAB	RAS	RCV	RCH
Distance measuring system	HEIDENHAIN	●	●	●	●
	RENISHAW	—	—	●	●
	NIKON	—	—	●	●

● Available

Direct Drive Rotary Tables

Project planning sheet for direct drive rotary tables

8. Project planning sheet for direct drive rotary tables

Company:	Processed by:
Technical consultant:	Date:
Purchasing consultant:	Project name:

Project plan (current state of project/schedule/aimed price)

Product selection				
Series	<input type="checkbox"/> RCV	<input type="checkbox"/> RCH	<input type="checkbox"/> RAB	<input type="checkbox"/> RAS
Table diameter	<input type="checkbox"/> 125 mm <input type="checkbox"/> 170 mm <input type="checkbox"/> 250 mm <input type="checkbox"/> 320 mm <input type="checkbox"/> _____ mm	<input type="checkbox"/> 200 mm <input type="checkbox"/> 400 mm <input type="checkbox"/> 600 mm <input type="checkbox"/> 800 mm <input type="checkbox"/> _____ mm	<input type="checkbox"/> 400 mm <input type="checkbox"/> 500 mm <input type="checkbox"/> 630 mm <input type="checkbox"/> 800 mm <input type="checkbox"/> _____ mm	<input type="checkbox"/> 170 mm <input type="checkbox"/> 200 mm <input type="checkbox"/> 250 mm <input type="checkbox"/> 320 mm <input type="checkbox"/> 650 mm <input type="checkbox"/> _____ mm
Distance measuring system	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> RENISHAW <input type="checkbox"/> NIKON	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> RENISHAW <input type="checkbox"/> NIKON	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> RENISHAW	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> RENISHAW
Accuracy	<input type="checkbox"/> ±2,5" <input type="checkbox"/> ±5" <input type="checkbox"/> ±15"	<input type="checkbox"/> ±2,5" <input type="checkbox"/> ±5" <input type="checkbox"/> ±15"	<input type="checkbox"/> ±2,5" <input type="checkbox"/> ±5" <input type="checkbox"/> ±15"	<input type="checkbox"/> ±2,5" <input type="checkbox"/> ±5" <input type="checkbox"/> ±15"
Control system	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> SIEMENS <input type="checkbox"/> MITSUBISHI <input type="checkbox"/> FANUC <input type="checkbox"/> _____	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> SIEMENS <input type="checkbox"/> MITSUBISHI <input type="checkbox"/> FANUC <input type="checkbox"/> _____	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> SIEMENS <input type="checkbox"/> MITSUBISHI <input type="checkbox"/> FANUC <input type="checkbox"/> _____	<input type="checkbox"/> HEIDENHAIN <input type="checkbox"/> SIEMENS <input type="checkbox"/> MITSUBISHI <input type="checkbox"/> FANUC <input type="checkbox"/> _____
Options	<input type="checkbox"/> Motor cable _____ m ¹⁾ <input type="checkbox"/> Encoder cable _____ m ¹⁾ <input type="checkbox"/> None	<input type="checkbox"/> Motor cable _____ m ¹⁾ <input type="checkbox"/> Encoder cable _____ m ¹⁾ <input type="checkbox"/> None	<input type="checkbox"/> Motor cable _____ m ¹⁾ <input type="checkbox"/> Encoder cable _____ m ¹⁾ <input type="checkbox"/> None	<input type="checkbox"/> Motor cable _____ m ¹⁾ <input type="checkbox"/> Encoder cable _____ m ¹⁾ <input type="checkbox"/> None
Operating mode	<input type="checkbox"/> Simultaneous machining <input type="checkbox"/> Cyclic operation <input type="checkbox"/> _____	<input type="checkbox"/> Simultaneous machining <input type="checkbox"/> Cyclic operation <input type="checkbox"/> _____	<input type="checkbox"/> Simultaneous machining <input type="checkbox"/> Cyclic operation <input type="checkbox"/> _____	<input type="checkbox"/> Simultaneous machining <input type="checkbox"/> Cyclic operation <input type="checkbox"/> _____
Further requirements	<input type="checkbox"/> Speed _____ <input type="checkbox"/> IP class _____		<input type="checkbox"/> Torque _____ <input type="checkbox"/> Other brands _____	

¹⁾ Available cable lengths: 3 m, 5 m, 7 m, 9 m


We live motion.



Linear Guideways



Ballscrews

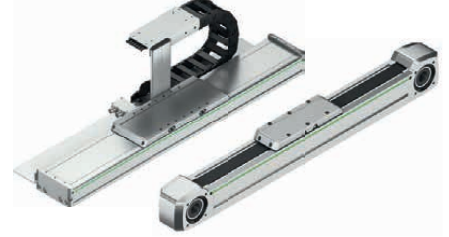

Linear Axes



Linear Axis Systems



Torque Motors



Robots



Linear Motor Components



Rotary Tables



Drives & Servo Motors

Germany

HIWIN GmbH
Brücklesbünd 1
D-77654 Offenburg
Phone +49 (0) 7 81 9 32 78-0
Fax +49 (0) 7 81 9 32 78-90
info@hiwin.de
www.hiwin.de

Taiwan

Headquarters
HIWIN Technologies Corp.
No. 7, Jingke Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2359-4510
Fax +886-4-2359-4420
business@hiwin.tw
www.hiwin.tw

Taiwan

Headquarters
HIWIN Mikrosystem Corp.
No. 6, Jingke Central Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2355-0110
Fax +886-4-2355-0123
business@hiwinmikro.tw
www.hiwinmikro.tw

France

HIWIN GmbH
4, Impasse Joffre
F-67202 Wolfisheim
Phone +33 (0) 3 88 28 84 80
info@hiwin.fr
www.hiwin.fr

Italy

HIWIN Srl
Via Pitagora 4
I-20861 Brugherio (MB)
Phone +39 039 287 61 68
Fax +39 039 287 43 73
info@hiwin.it
www.hiwin.it

Poland

HIWIN GmbH
ul. Puławska 405a
PL-02-801 Warszawa
Phone +48 22 544 07 07
Fax +48 22 544 07 08
info@hiwin.pl
www.hiwin.pl

Switzerland

HIWIN Schweiz GmbH
Eichwiesstrasse 20
CH-8645 Jona
Phone +41 (0) 55 225 00 25
Fax +41 (0) 55 225 00 20
info@hiwin.ch
www.hiwin.ch

Slovakia

HIWIN s.r.o., o.z.z.o.
Mládežnícka 2101
SK-01701 Považská Bystrica
Phone +421 424 43 47 77
Fax +421 424 26 23 06
info@hiwin.sk
www.hiwin.sk

Czech Republic

HIWIN s.r.o.
Medkova 888/11
CZ-62700 Brno
Phone +42 05 48 528 238
Fax +42 05 48 220 223
info@hiwin.cz
www.hiwin.cz

Austria

HIWIN GmbH
info@hiwin.at
www.hiwin.at

Netherlands

HIWIN GmbH
info@hiwin.nl
www.hiwin.nl

Romania

HIWIN GmbH
info@hiwin.ro
www.hiwin.ro

Slovenia

HIWIN GmbH
info@hiwin.si
www.hiwin.si

Hungary

HIWIN GmbH
info@hiwin.hu
www.hiwin.hu

China

HIWIN Corp.
www.hiwin.cn

Japan

HIWIN Corp.
mail@hiwin.co.jp
www.hiwin.co.jp

USA

HIWIN Corp.
info@hiwin.com
www.hiwin.com

Korea

HIWIN Corp.
www.hiwin.kr

Singapore

HIWIN Corp.
www.hiwin.sg