



Torque Motors

Motors, Drives & Accessories

Torque Motors

Alongside complete rotary tables, HIWIN also offers individual torque motor components for the customised design of directly driven rotary axes. The torque motor components each consist of a hollow shaft rotor and a stator with coils.

Torque Motors

Contents

Contents

1	Product overview	7
2	General information	8
2.1	Typical features of the torque motors	8
2.2	General structure of the torque motors	8
2.3	Typical application examples for torque motors	9
2.4	Glossary	10
3	HIWIN torque motors DMR	11
3.1	Special characteristics of the torque motors DMR	11
3.2	Order code for torque motors DMR	11
3.3	DMR torques	11
3.4	Torque motor DMR specifications	12
3.4.1	DMR0 specifications	12
3.4.2	DMR1 specifications	14
3.4.3	DMR3 specifications	16
3.4.4	DMR7 specifications	18
4	HIWIN torque motors TMRW.....	20
4.1	Special characteristics of the torque motors TMRW	20
4.2	Order code for torque motors TMRW	20
4.3	TMRW torques	21
4.4	Torque motor TMRW specifications	23
4.4.1	TMRW1 specifications	23
4.4.2	TMRW2 specifications	26
4.4.3	TMRW4 specifications	29
4.4.4	TMRW7 specifications	32
4.4.5	TMRWA specifications	35
4.4.6	TMRWD specifications	38
4.4.7	TMRWG specifications	41
5	HIWIN torque motors TM-2	44
5.1	Special characteristics of the torque motors TM-2	44
5.2	Order code for torque motors TM-2	44
5.3	TM-2 torques	45
5.4	Torque motor TM-2 specifications	46
5.4.1	TM-2-1 specifications	46
5.4.2	TM-2-2 specifications	49
5.4.3	TM-2-4 specifications	52
5.4.4	TM-2-7 specifications	55
5.4.5	TM-2-A specifications	58
5.4.6	TM-2-D specifications	61
5.4.7	TM-2-G specifications	64
6	HIWIN torque motors IM-2	67
6.1	Special characteristics of the torque motors IM-2	67
6.2	Order code for torque motors IM-2	67
6.3	IM-2 torques	68
6.4	Torque motor IM-2 specifications	69
6.4.1	IM-2-2 specifications	69
6.4.2	IM-2-4 specifications	72
6.4.3	IM-2-7 specifications	75
6.4.4	IM-2-A specifications	78
6.4.5	IM-2-G specifications	82
7	Options and accessories	85
7.1	Closed cooling jacket	85
7.2	Cable outlet orientations of the torque motors	86

Torque Motors

Product overview

1. Product overview



HIWIN torque motors DMR

[Page 11](#)

- Torques up to 450 Nm
- Typical field of application: automation technology



HIWIN torque motors TMRW

[Page 20](#)

- Torques up to 5,020 Nm
- Water cooling
- Typical field of application: machine tool



HIWIN torque motors TM-2

[Page 44](#)

- New generation of TMRW series
- Torques up to 6,000 Nm
- Water cooling
- Typical field of application: machine tool



HIWIN torque motors IM-2

[Page 67](#)

- High speed motor with highest speed spectrum
- Torques up to 5,700 Nm
- Water cooling
- Typical field of application: machine tool, specially combined turning/milling axes



Options and accessories

[Page 85](#)

Torque Motors

General information

2. General information

2.1 Typical features of the torque motors

HIWIN torque motors are high-pole synchronous servomotors. Due to the high-pole structure, no downstream transmission is required for speed reduction and torque increase. HIWIN torque motors are typically used as direct drives in high-precision rotary and tilting axes.

The power transmission between the input and output sides is contactless. Mechanical components in the drivetrain, as they are present in classic engine/gearbox combinations, are not required.

The result is a wear- and maintenance-free drive with maximum efficiency. Due to the very rigid load coupling, HIWIN torque motors are predestined for highly dynamic applications with rapid load changes that push classic motor/gearbox combinations to their limits. In order to avoid introducing additional process heat, especially in the machine tool sector, the torque motors are equipped with cooling channels for liquid cooling.

- Wear-free and maintenance-free direct drive
- High constant torque independent of speed
- Highly dynamic and silent
- Play-free and highly precise
- Fast speed changes and maximum rigidity
- High efficiency
- Compact design with hollow shaft
- Made ready for liquid cooling



2.2 General structure of the torque motors

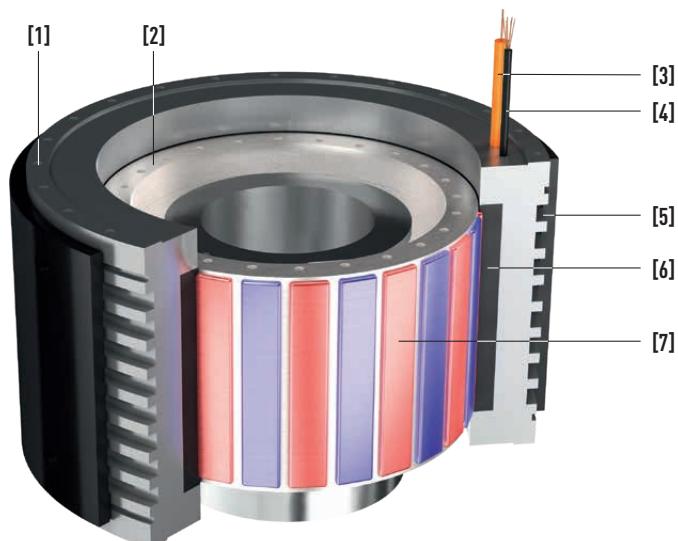




Table 2.1 Main components of the torque motors

Pos.	Component	Pos.	Component
1	Stator	5	Cooling channels for liquid cooling
2	Rotor with permanent magnets and hollow shaft	6	Winding package encapsulated in epoxy resin
3	Motor cable	7	Permanent magnets
4	Temperature sensor cable		

2.3 Typical application examples for torque motors

Table 2.2 Typical application examples for torque motors

Machine tools	Automation technology
	Rotary and tilting axes (A, B, C axes) 
	Combined axes for turning and milling operations 
	Tool changer (turret) 
	Infeed axes of pin chasing grinding machines (non-circular grinding) 
	Brake motors for roll-off drives Electronic rotary indexing tables Servo presses Laser processing (B and C axes)

Torque Motors

General information

2.4 Glossary

Continuous current I_c / I_{c_wc} (A)

The continuous current or rated current I_c , or I_{c_wc} in the case of water cooling, is the current which in continuous operation heats the motor to the permissible motor temperature T_{max} at an ambient temperature of 25 °C.

Continuous torque T_c / T_{c_wc} (Nm)

The motor generates the continuous torque or rated torque in continuous operation (duty cycle = 100 %).

Stall current I_s / I_{s_wc} (A)

The stall current is the current that generates the maximum stall torque T_s or T_{s_wc} at a motor temperature of 25 °C.

Stall torque T_s / T_{s_wc} (Nm)

If the motor is operated with a frequency of 0 – 1 Hz, the motor torque must be reduced to the maximum stall torque T_s or T_{s_wc} in continuous operation.

Peak current I_p (A)

The peak current is applied briefly to generate the peak torque. The maximum permissible duration of the peak current is one second. The motor must then cool down to the nominal temperature before the peak current can be applied again.


Peak torque T_p (Nm)

The peak torque is the maximum torque that the motor can generate for about one second. For HIWIN products, it is at the end of the linear modulation range at the peak current I_p and is particularly important during acceleration and braking.

Torque-speed curve

The torque-speed curve describes the available torque T as a function of the speed n and the input voltage U_{DC} .

Torque

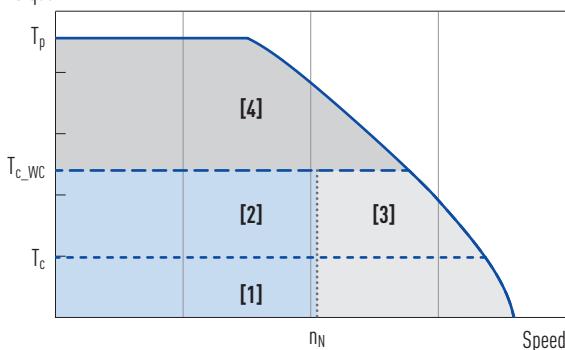

Range [1]

Continuous operation without water cooling: When operating without water cooling, the motor can be operated continuously up to the maximum motor torque T_c and the maximum speed n_N .

Ranges [1] + [2]

Continuous operation with water cooling: When operating with water cooling, the motor can be operated in continuous operation up to the maximum motor torque T_{c_wc} and the maximum speed n_N .

Range [3]

Intermittent operation: When operating at a speed greater than n_N , the load cycle must be reduced to avoid thermal overload of the motor.

Range [4]

Intermittent operation: When operating with a torque greater than T_c (without water cooling) or T_{c_wc} (with water cooling), the load cycle must be reduced to avoid thermal overload of the motor.

Back emf constant K_u ($V_{eff}/(rad/s)$)

The back EMF constant K_u is the ratio of the back EMF voltage (V_{eff}) to the motor speed (rad/s). The back EMF is an electromagnetic force generated by the movement of the coils in the magnetic field of the permanent magnets and acts contrary to the motor force.

Winding temperature T_{max} (°C)

Permissible winding temperature. The actual motor temperature depends on the installation conditions, the cooling conditions and the operating conditions and can therefore only be determined in the specific case and only inadequately calculated.

Winding resistance R_{25} (Ω)

Winding-specific parameter that specifies the winding resistance line to line at 25 °C winding temperature.

Winding inductance L_{25} (mH)

Winding-specific parameter indicating the inductance line to line at 25 °C winding temperature.

Motor constant K_m (Nm/VW)

Ratio of generated power to power loss, i. e. a measure of the efficiency of a motor.

Number of poles $2p$

The number of poles $2p$ indicates the number of single poles of the motor, P the number of pole pairs.

Thermal resistance R_{th} (°C/W)

Thermal resistance is defined as the resistance below which the motor winding dissipates heat to the environment. Considered is the natural convection at an ambient temperature of 25 °C, and for the water-cooled versions at a water temperature of 25 °C.

Torque constant K_t (Nm/A)

Winding-specific parameter from which the resulting torque at 25 °C motor temperature is calculated by multiplication with the input current.

$$T = I \times K_t$$

Maximum speed n_{max} (min⁻¹)

The maximum speed is defined as the speed at which a specific torque is still achieved. 3 maximum speeds are specified, n_{max} at T_c , n_{max} at T_{c_wc} and n_{max} at T_p .

Rated speed n_N (min⁻¹)

The rated speed is defined as the speed at which the rotor does not heat up above 80 °C in continuous operation. At higher speeds, either the duty cycle must be reduced or suitable measures must be taken for rotor cooling.

Maximum input voltage U_{max} (VDC)

Maximum DC bus voltage of the drive amplifier, or the resulting maximum input voltage at the motor.

3. HIWIN torque motors DMR

3.1 Special characteristics of the torque motors DMR

DMR series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for the field of automation technology. The rotor is designed as a ring element. Due to their high continuous and peak torques, they enable high accelerations and thus short cycle times.




Key features of the torque motors DMR:

- Wear- and maintenance-free direct drive
- Play-free and highly precise
- UL-certified (DMR3, DMR7)


Typical fields of application for the torque motors DMR:

- Automation technology
- Rotary indexing tables

3.2 Order code for torque motors DMR

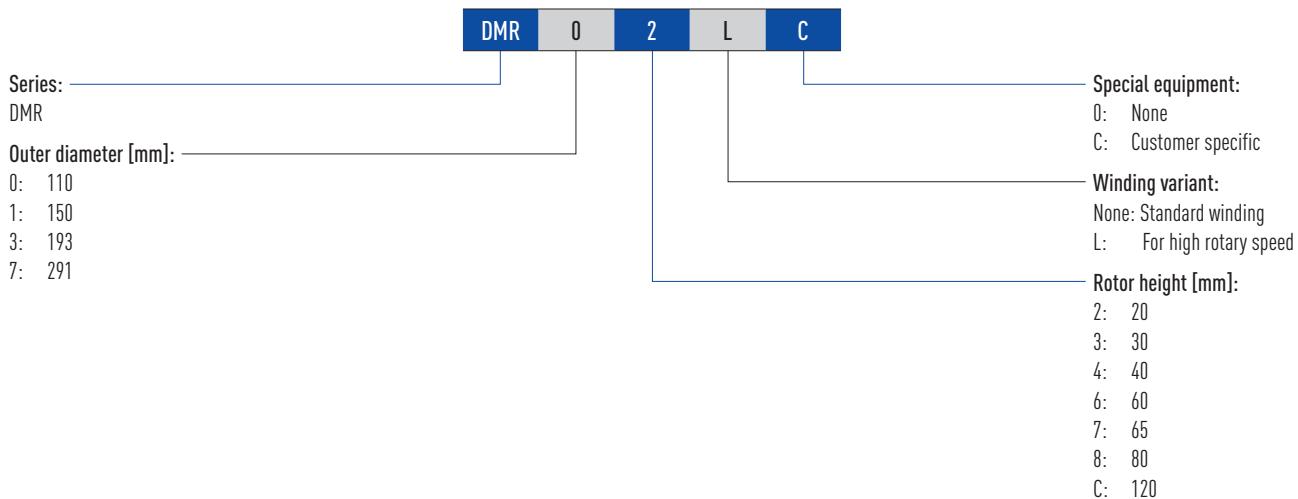

3.3 DMR torques

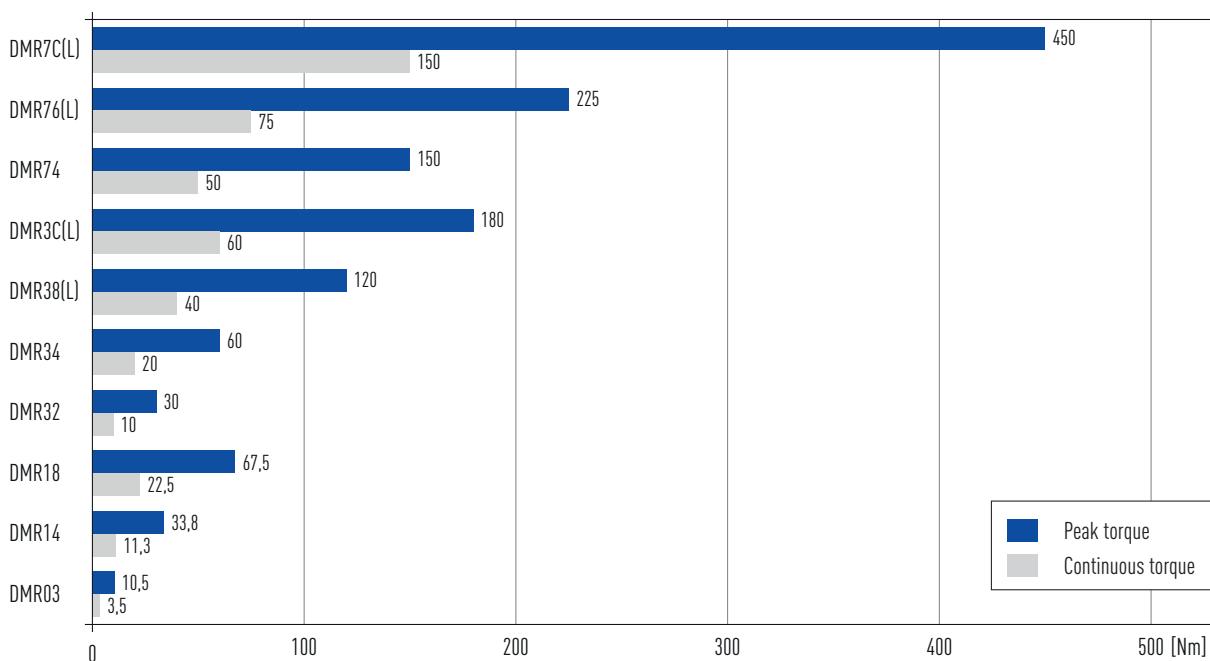

Torque Motors

HIWIN torque motors DMR

3.4 Torque motor DMR specifications

3.4.1 DMR0 specifications

Torque-speed curve (DC bus voltage: 600 VDC)

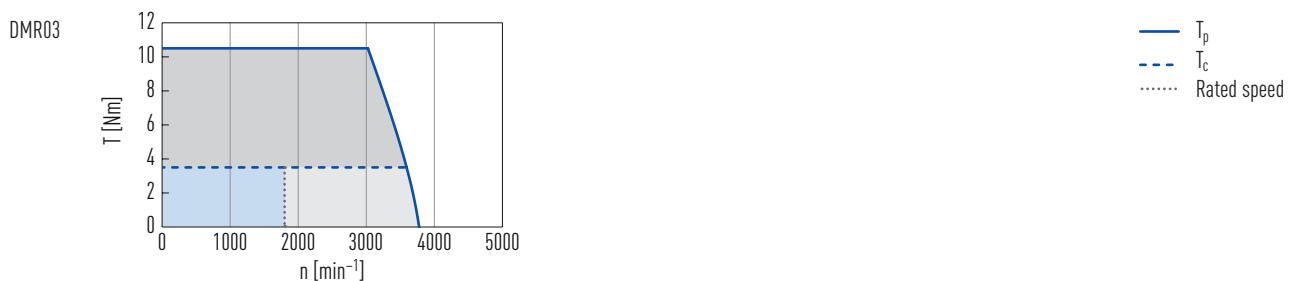


Table 3.1 Technical data for DMR0



	Symbol	Unit	DMR03
Torques and electrical parameters			
Peak torque (for 1 sec.)	T_p	Nm	10.5
Continuous torque ¹⁾	T_c	Nm	3.5
Stall torque	T_s	Nm	2.5
Peak current (for 1 sec.)	I_p	A	6.8
Continuous current ¹⁾	I_c	A	2.3
Stall current	I_s	A	1.6
Resistance ²⁾	R_{25}	Ω	7.1
Inductance ²⁾	L_{25}	mH	15.2
Motor constant	K_m	Nm/ \sqrt{W}	0.5
Electrical time constant	K_e	ms	2.1
Torque constant	K_t	Nm/A	1.55
Back emf constant	K_u	$V_{eff}/(rad/s)$	0.82
Inertia of rotor	J	kgm^2	0.00018
Thermal resistance	R_{th}	$^{\circ}C/W$	1.76
Thermal time constant	T_{th}	s	1,930
Max. DC bus voltage	U_{max}	VDC	600
Rated speed	n_N	min^{-1}	1,800
Mechanical parameters			
Number of poles	$2p$		10
Thermal sensor			PTC SNM 120
Stator height	H_S	mm	68.5
Rotor height	H_R	mm	32.5
Mass of motor	M_m	kg	2.6

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature

¹⁾ Coil temperature: $120^{\circ}C$

²⁾ Line to line

Dimensions DMR0

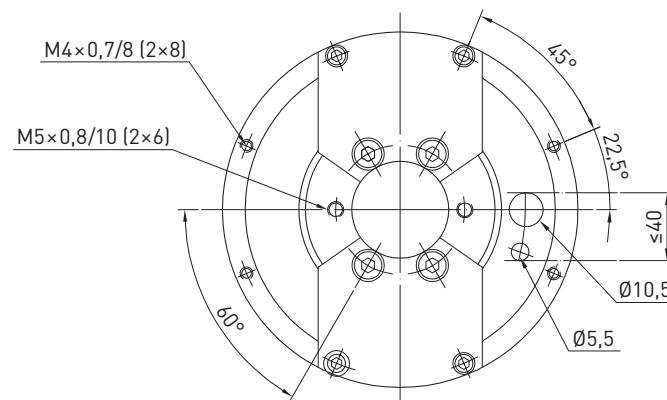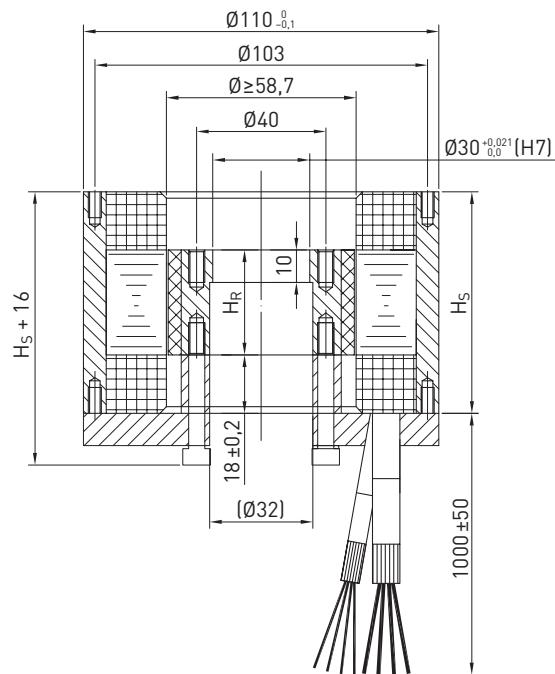

Torque Motors

HIWIN torque motors DMR

3.4.2 DMR1 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

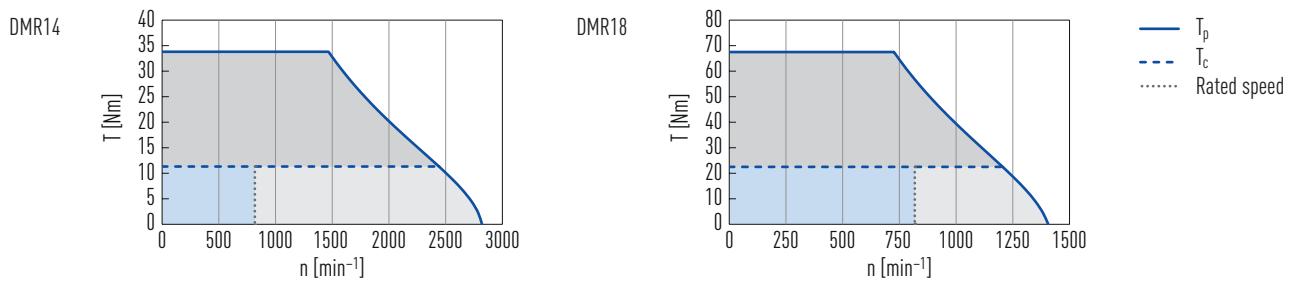


Table 3.2 Technical data for DMR1



	Symbol	Unit	DMR14	DMR18
Torques and electrical parameters				
Peak torque (for 1 sec.)	T_p	Nm	33.8	67.5
Continuous torque ¹⁾	T_c	Nm	11.3	22.5
Stall torque	T_s	Nm	7.9	15.8
Peak current (for 1 sec.)	I_p	A	13.5	13.5
Continuous current ¹⁾	I_c	A	4.5	4.5
Stall current	I_s	A	3.2	3.2
Resistance ²⁾	R_{25}	Ω	3.9	6.5
Inductance ²⁾	L_{25}	mH	14	26
Motor constant	K_m	Nm/ \sqrt{W}	1.0	1.6
Electrical time constant	K_e	ms	3.6	4.0
Torque constant	K_t	Nm/A	2.50	5.0
Back emf constant	K_u	$V_{eff}/(rad/s)$	1.2	2.4
Inertia of rotor	J	kgm^2	0.00088	0.00175
Thermal resistance	R_{th}	$^{\circ}C/W$	0.80	0.48
Thermal time constant	T_{th}	s	2,290	2,520
Max. DC bus voltage	U_{max}	VDC	600	
Rated speed	n_N	min^{-1}	818	818
Mechanical parameters				
Number of poles	$2p$		22	
Thermal sensor			PTC SNM 120	
Stator height	H_s	mm	70	110
Rotor height	H_R	mm	40	80
Mass of motor	M_m	kg	4.8	8.3

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature

¹⁾ Coil temperature: $120^{\circ}C$

²⁾ Line to line

Dimensions DMR1

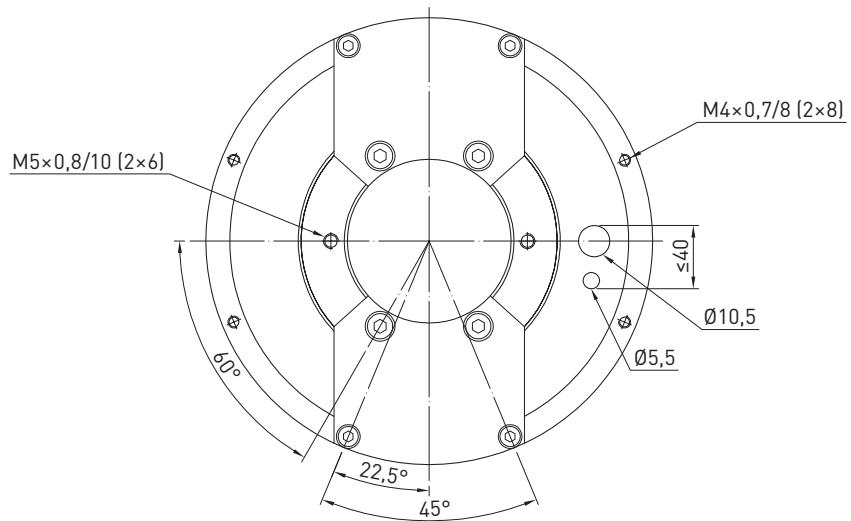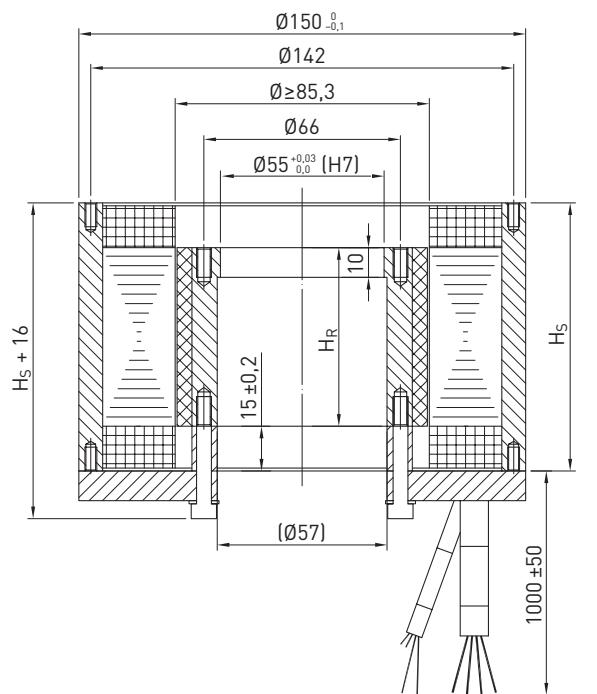

Torque Motors

HIWIN torque motors DMR

3.4.3 DMR3 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

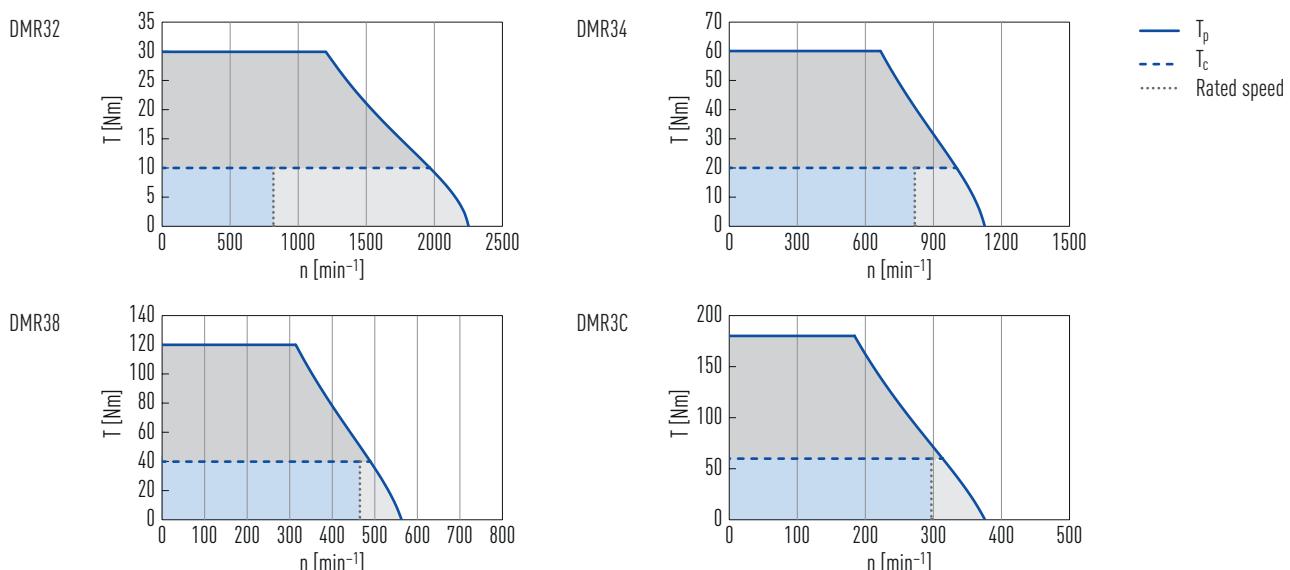


Table 3.3 Technical data for DMR3



	Symbol	Unit	DMR32	DMR34	DMR38	DMR3C
Torques and electrical parameters						
Peak torque (for 1 sec.)	T_p	Nm	30	60	120	180
Continuous torque ¹⁾	T_c	Nm	10	20	40	60
Stall torque	T_s	Nm	7	14	28	42
Peak current (for 1 sec.)	I_p	A	10.2	10.2	10.2	10.2
Continuous current ¹⁾	I_c	A	3.4	3.4	3.4	3.4
Stall current	I_s	A	2.4	2.4	2.4	2.4
Resistance ²⁾	R_{25}	Ω	5.0	7.5	12.0	17.1
Inductance ²⁾	L_{25}	mH	20.6	34.6	53.6	84.4
Motor constant	K_m	Nm/ \sqrt{W}	1.1	1.8	2.8	3.6
Electrical time constant	K_e	ms	4.1	4.6	4.5	4.9
Torque constant	K_t	Nm/A	3	6	12	18
Back emf constant	K_u	$V_{eff}/(rad/s)$	1.5	3.0	6.0	9.0
Inertia of rotor	J	kgm^2	0.002	0.005	0.009	0.014
Thermal resistance	R_{th}	$^{\circ}C/W$	1.1	0.73	0.46	0.32
Thermal time constant	T_{th}	s	1,980	2,020	2,130	2,170
Max. DC bus voltage	U_{max}	VDC	600			
Rated speed	n_N	min^{-1}	818	818	465	297
Mechanical parameters						
Number of poles	$2p$		22			
Thermal sensor			PTC SNM 120			
Stator height	H_S	mm	60	80	120	160
Rotor height	H_R	mm	20	40	80	120
Mass of motor	M_m	kg	5.7	8.2	13.2	18.1

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature

¹⁾ Coil temperature: $120^{\circ}C$

²⁾ Line to line

Dimensions DMR3

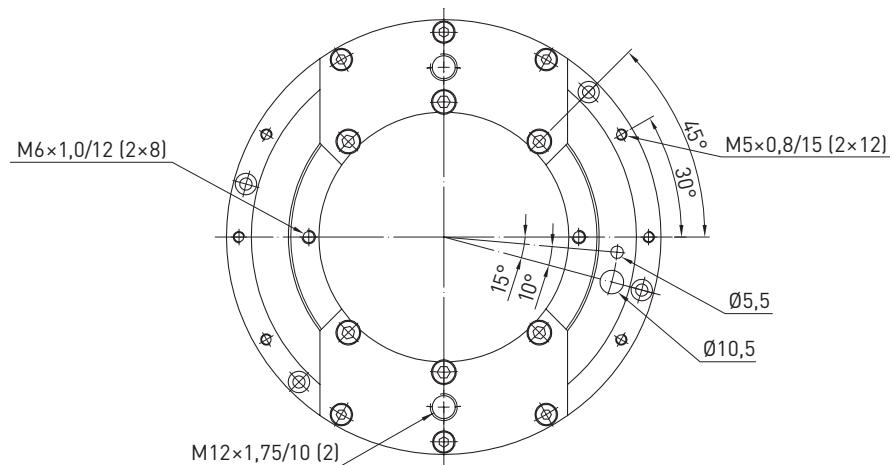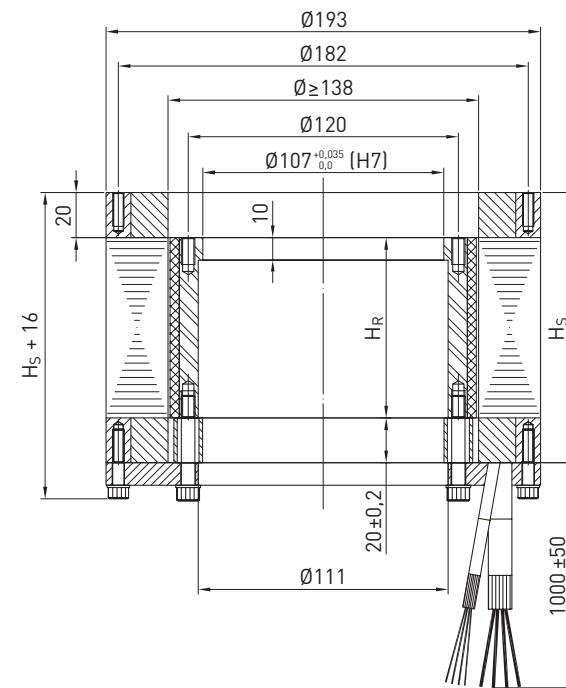

Torque Motors

HIWIN torque motors DMR

3.4.4 DMR7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

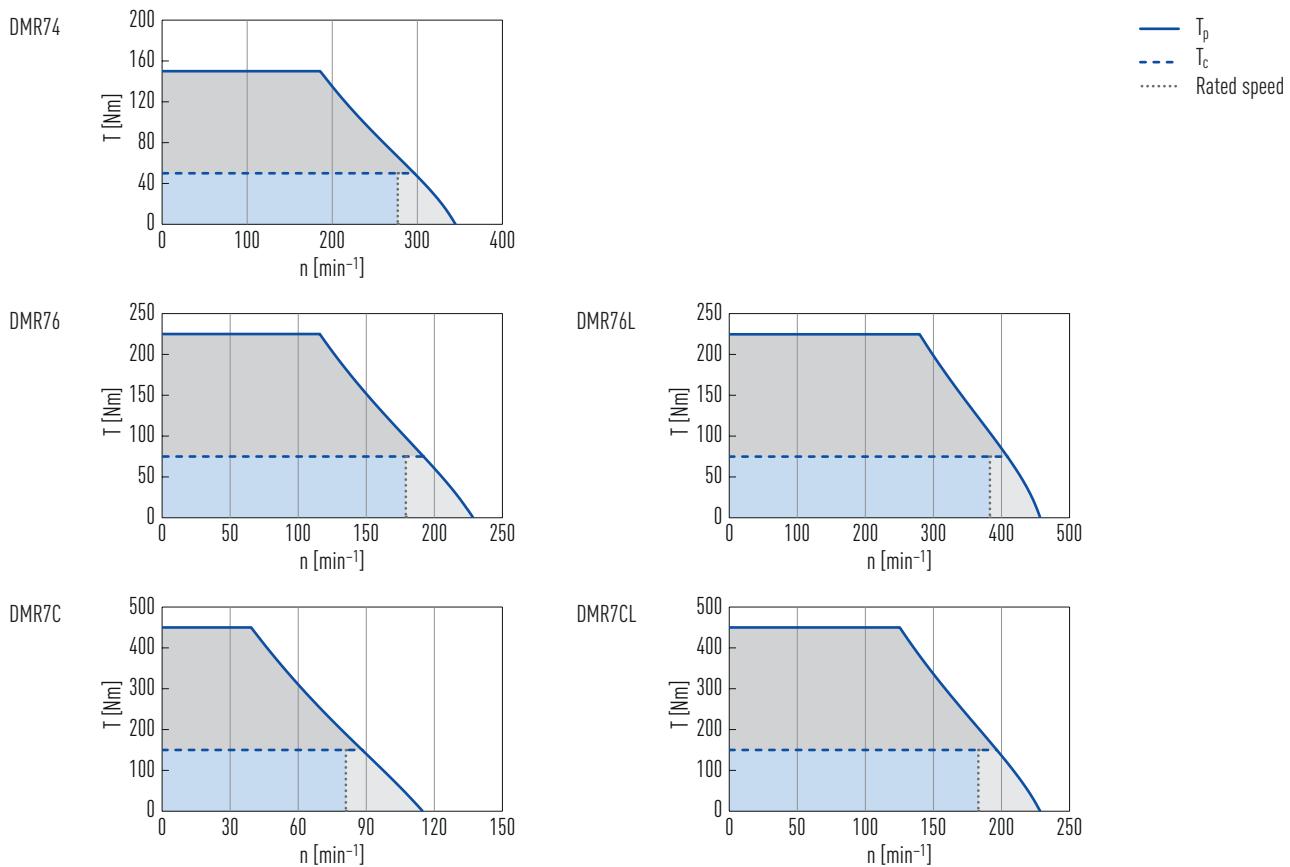


Table 3.4 Technical data for DMR7

	Symbol	Unit	DMR74	DMR76	DMR76L	DMR7C	DMR7CL
Torques and electrical parameters							
Peak torque (for 1 sec.)	T_p	Nm	150	225		450	
Continuous torque¹⁾	T_c	Nm	50	75		150	
Stall torque	T_s	Nm	35.0	52.5		105.0	
Peak current (for 1 sec.)	I_p	A	10.2	10.2	20.4	10.2	20.4
Continuous current¹⁾	I_c	A	3.4	3.4	6.8	3.4	6.8
Stall current	I_s	A	2.4	2.4	4.8	2.4	4.8
Resistance²⁾	R_{25}	Ω	12.9	17.0	4.3	29.0	7.3
Inductance²⁾	L_{25}	mH	55.0	76.0	19.0	145.0	36.3
Motor constant	K_m	Nm/ $\sqrt{\text{W}}$	3.9	5.1	5.0	7.7	7.7
Electrical time constant	K_e	ms	4.3	4.5	4.4	5.0	5.0
Torque constant	K_t	Nm/A	17.0	25.6	12.8	51.1	25.5
Back emf constant	K_u	V _{eff} /(rad/s)	9.8	14.8	7.4	29.5	14.8
Inertia of rotor	J	kgm^2	0.044	0.061		0.11	
Thermal resistance	R_{th}	$^\circ\text{C}/\text{W}$	0.42	0.32		0.19	
Thermal time constant	T_{th}	s	2,230	2,330		2,350	
Max. DC bus voltage	U_{max}	VDC	600				
Rated speed	n_R	min^{-1}	277	179	383	81	183

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25°C ambient temperature

¹⁾ Coil temperature: 120°C

²⁾ Line to line

Table 3.4 Technical data for DMR7



	Symbol	Unit	DMR74	DMR76	DMR76L	DMR7C	DMR7CL
Mechanical parameters							
Number of poles	2p		44				
Thermal sensor			PTC SNM 120				
Stator height	H _S	mm	80	100		160	
Rotor height	H _R	mm	40	60		120	
Mass of motor	M _m	kg	15.9	20.4		33.7	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 °C ambient temperature

1) Coil temperature: 120 °C

2) Line to line

Dimensions DMR7

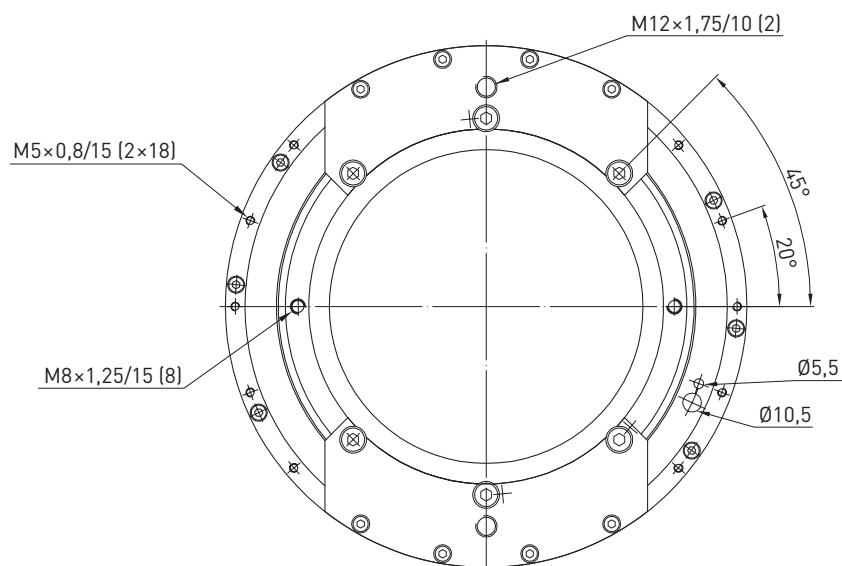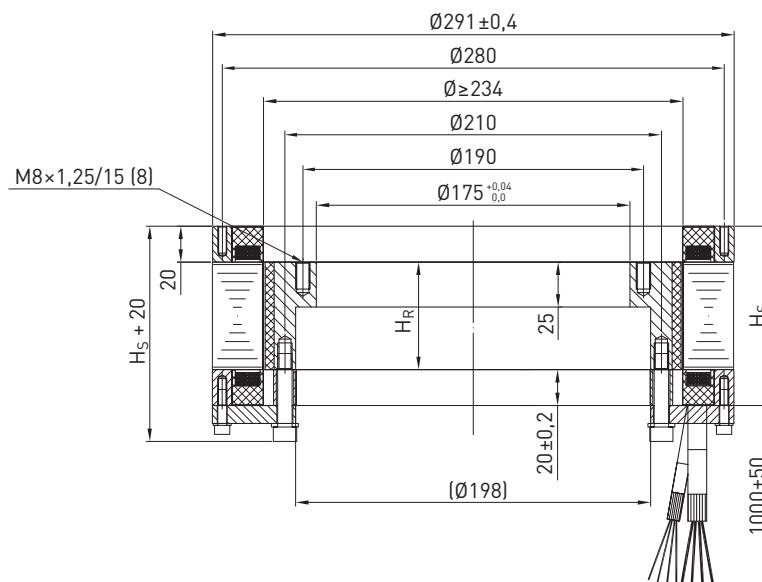

Torque Motors

HIWIN torque motors TMRW

4. HIWIN torque motors TMRW

4.1 Special characteristics of the torque motors TMRW

TMRW series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for applications in machine tools.

Due to the integrated cooling channels, the torque motor can be operated with liquid cooling. No additional process heat is then introduced into the machine and higher continuous torques can be achieved.




Key features of the torque motors TMRW:

- Wear- and maintenance-free direct drive
- Play-free and highly precise
- Prepared for liquid cooling
- UL-certified


Typical fields of application for the torque motors TMRW:

- Machine tools
- Servo presses
- Laser processing

4.2 Order code for torque motors TMRW

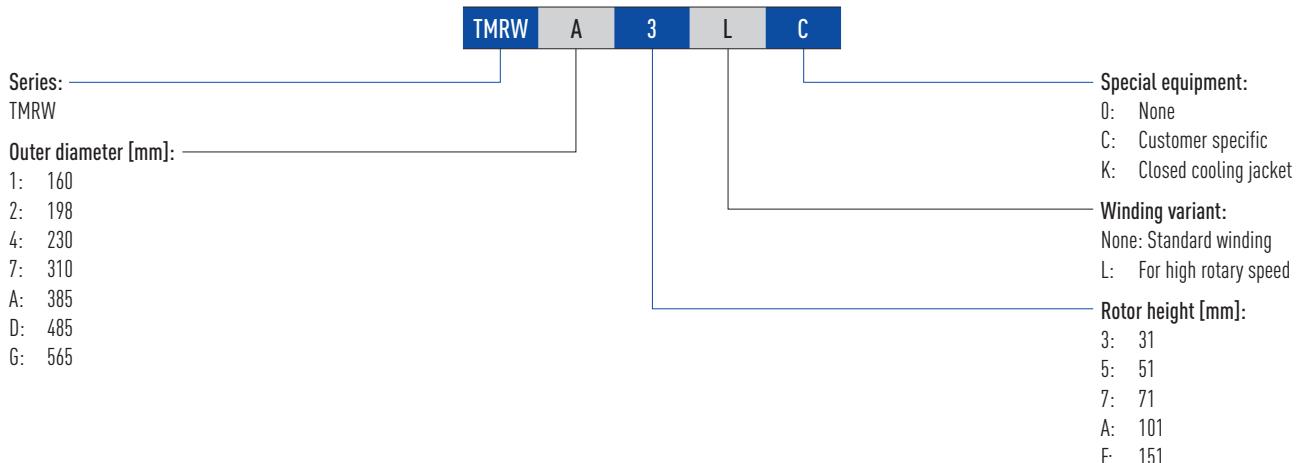


4.3 TMRW torques

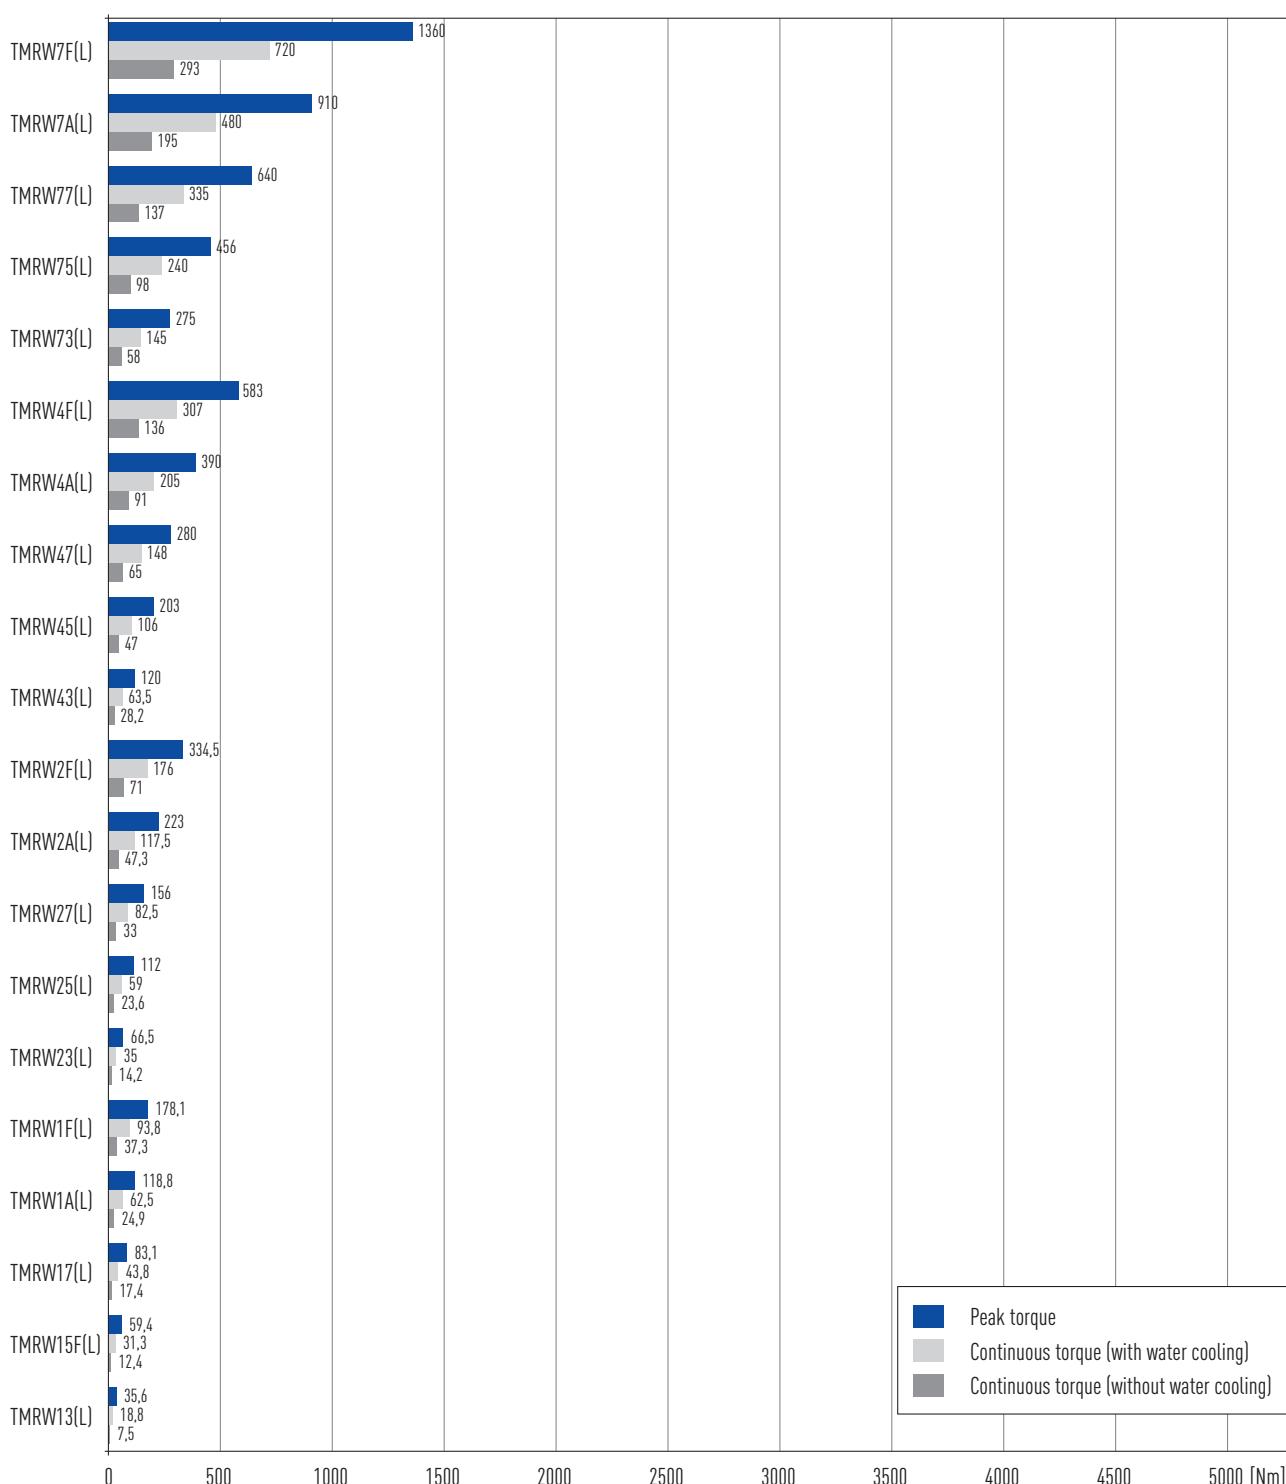

Torque Motors


HIWIN torque motors TMRW

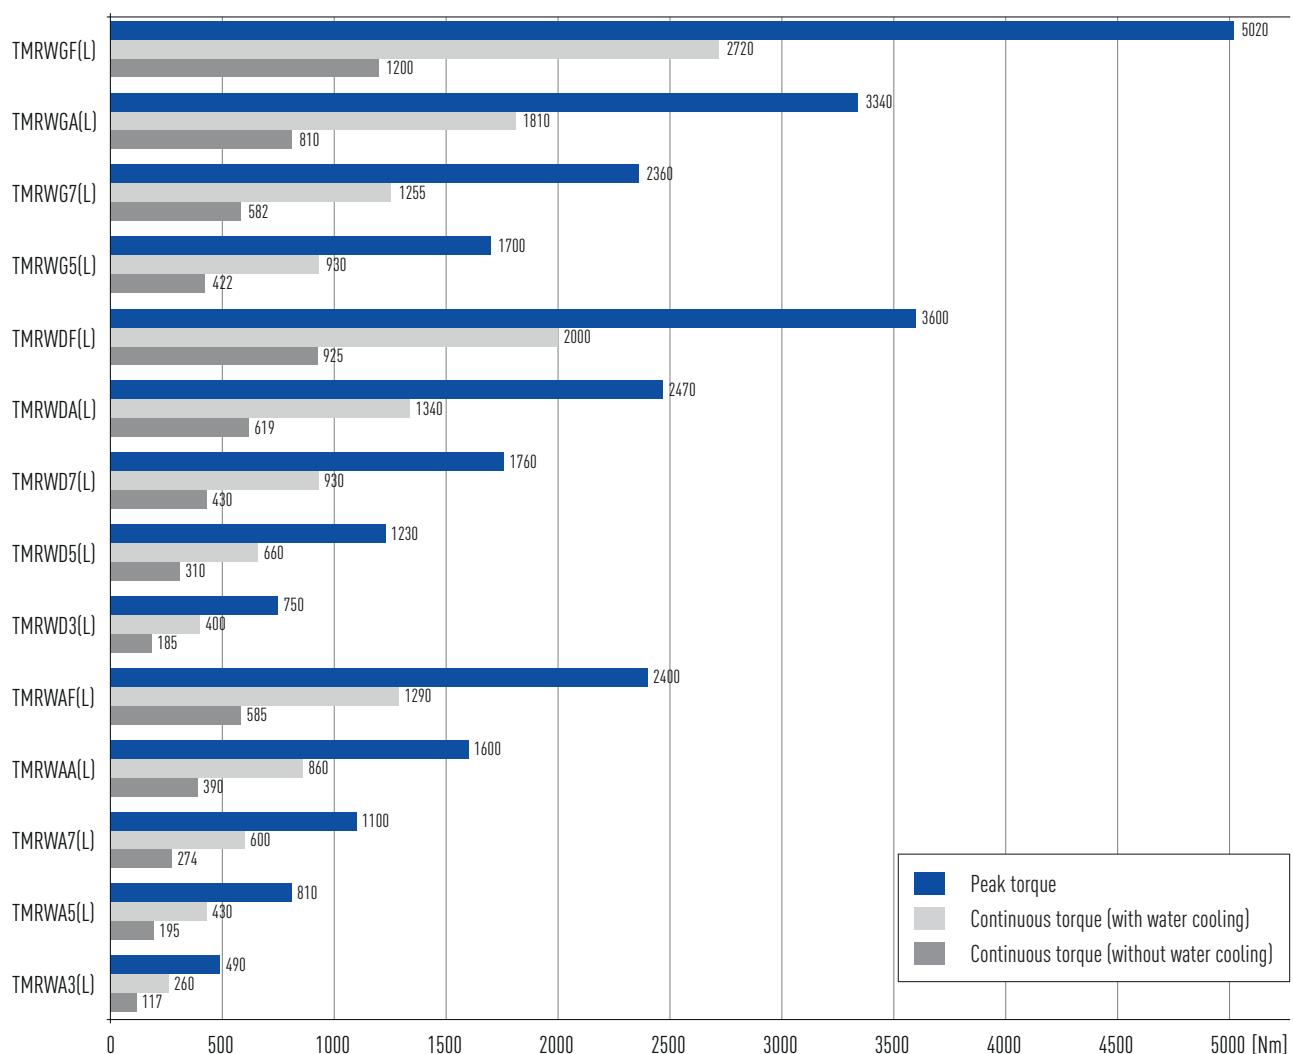

4.4 Torque motor TMRW specifications

4.4.1 TMRW1 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

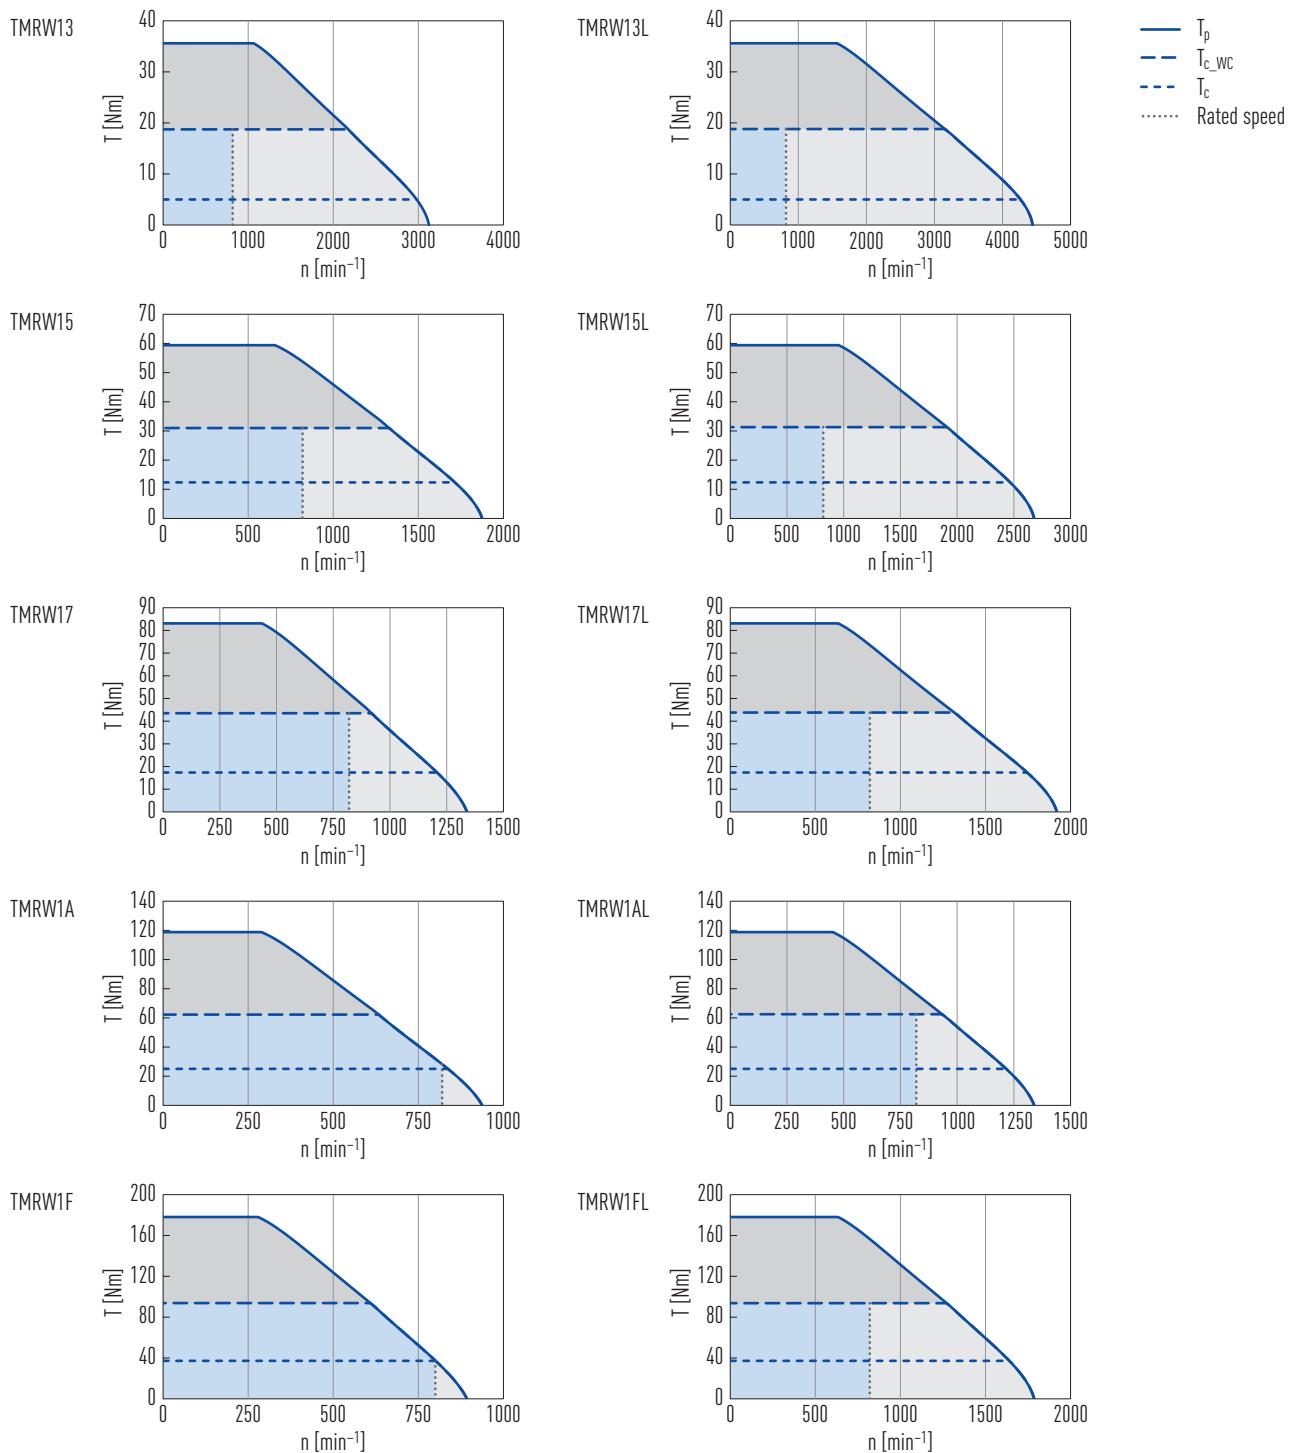

Torque Motors

HIWIN torque motors TMRW

Table 4.1 Technical data for TMRW1




	Symbol	Unit	TMRW13	TMRW13L	TMRW15	TMRW15L	TMRW17	TMRW17L	TMRW1A	TMRW1AL	TMRW1F	TMRW1FL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	35.6		59.4		83.1		118.8		178.1	
Continuous torque¹⁾	T_c	Nm	7.5		12.4		17.4		24.9		37.3	
Continuous torque (WC)	T_{c_WC}	Nm	18.8		31.3		43.8		62.5		93.8	
Stall torque	T_s	Nm	5		9		12		17		26	
Stall torque (WC)	T_{s_WC}	Nm	13		22		31		44		66	
Peak current (for 1 sec.)	I_p	A	27.0	38.9	27.0	38.9	27.0	38.9	27.0	38.9	38.9	77.8
Continuous current¹⁾	I_c	A	4.0	5.7	4.0	5.7	4.0	5.7	4.0	5.7	5.7	11.4
Continuous current (WC)	I_{c_WC}	A	10.0	14.4	10.0	14.4	10.0	14.4	10.0	14.4	14.4	28.8
Stall current	I_s	A	2.8	4.0	2.8	4.0	2.8	4.0	2.8	4.0	4.0	8.0
Stall current (WC)	I_{s_WC}	A	7.0	10.1	7.0	10.1	7.0	10.1	7.0	10.1	10.1	20.2
Resistance²⁾	R_{25}	Ω	3.30	1.60	4.50	2.36	6.20	2.90	7.70	3.80	5.50	1.37
Inductance²⁾	L_{25}	mH	10.5	5.1	16.0	8.0	22.5	11.9	31.0	15.5	21.7	5.9
Motor constant	K_m	Nm/ \sqrt{W}	0.84	0.85	1.19	1.16	1.43	1.46	1.83	1.83	2.28	2.28
Electrical time constant	K_e	ms	3.2	3.2	3.6	3.4	3.6	4.1	4.0	4.1	3.9	4.3
Torque constant	K_t	Nm/A	1.87	1.32	3.10	2.18	4.36	3.06	6.23	4.36	6.55	3.27
Back emf constant	K_u	$V_{eff}/(rad/s)$	1.08	0.76	1.80	1.26	2.52	1.76	3.60	2.52	3.78	1.89
Inertia of rotor	J	kgm^2	0.0010		0.0016		0.0023		0.0033		0.0049	
Thermal resistance	R_{th}	$^{\circ}C/W$	1.20	1.22	0.88	0.83	0.64	0.67	0.51	0.51	0.35	0.36
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.192	0.191	0.141	0.129	0.102	0.105	0.082	0.080	0.056	0.056
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_c	n	min^{-1}	2,800	4,000	1,600	2,400	1,150	1,700	800	1,170	760	1,600
Max. speed at T_{c_WC}	n	min^{-1}	2,200	3,200	1,200	1,750	830	1,300	580	870	540	1,200
Max. speed at T_p	n	min^{-1}	1,000	1,600	600	830	400	610	230	390	210	560
Rated speed	n_N	min^{-1}	820									
Mechanical parameters												
Number of poles	$2p$		22									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H_S	mm	70		90		110		140		190	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15							
Rotor mass	M_r	kg	0.6		1.0		1.4		2.0		3.0	
Stator mass	M_s	kg	3.7		5.1		6.2		8.6		12.2	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature

WC: with water cooling

¹⁾ Coil temperature: $120^{\circ}C$

²⁾ Line to line

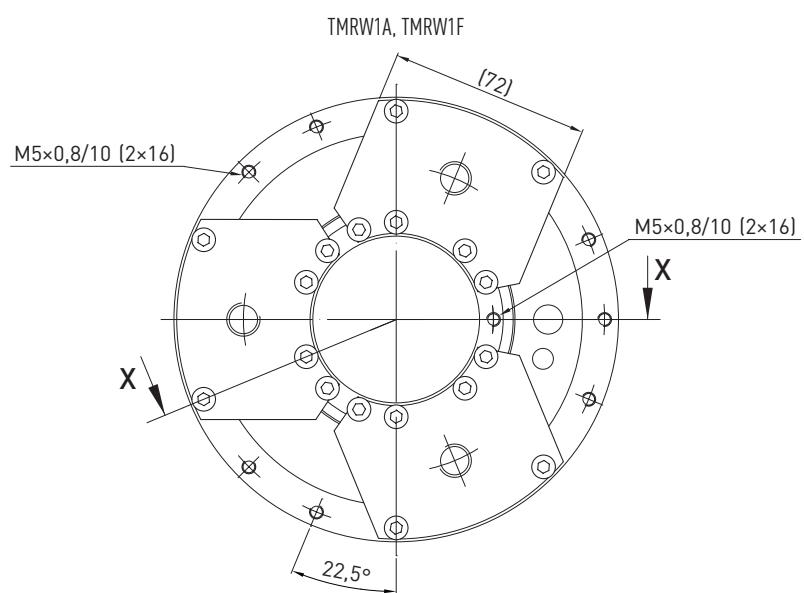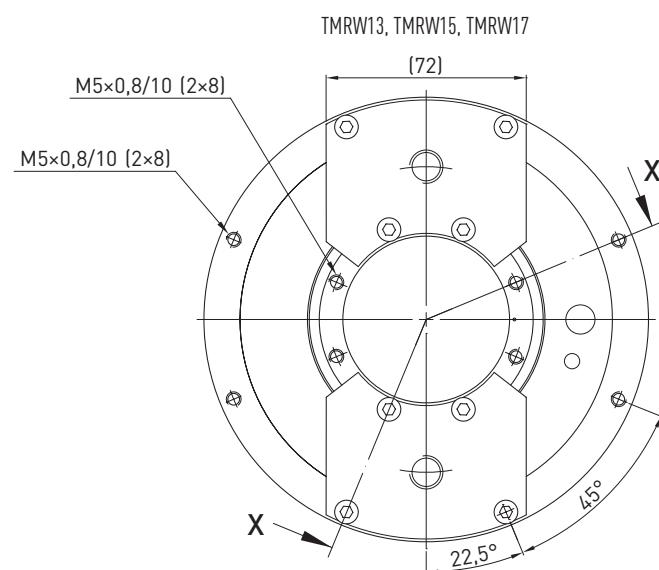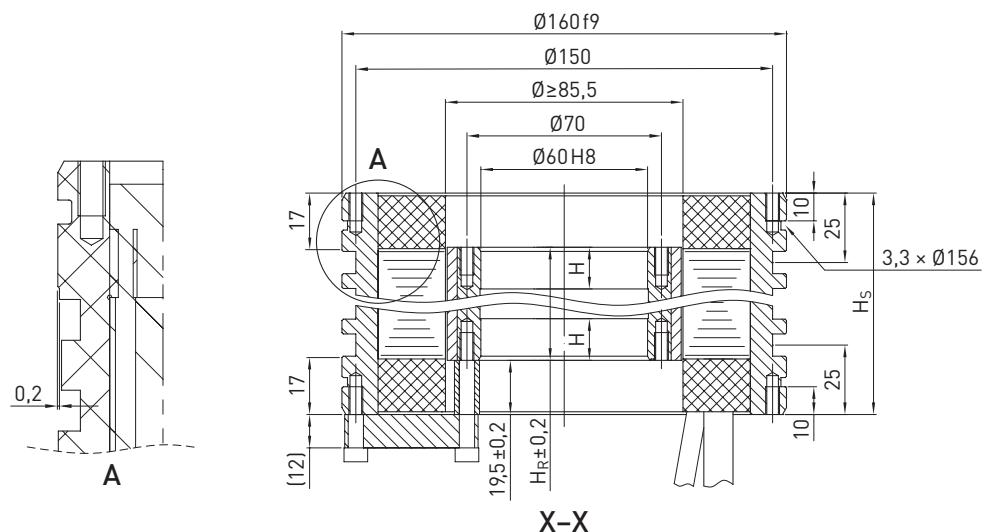Dimensions TMRW1


Torque Motors

HIWIN torque motors TMRW

4.4.2 TMRW2 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

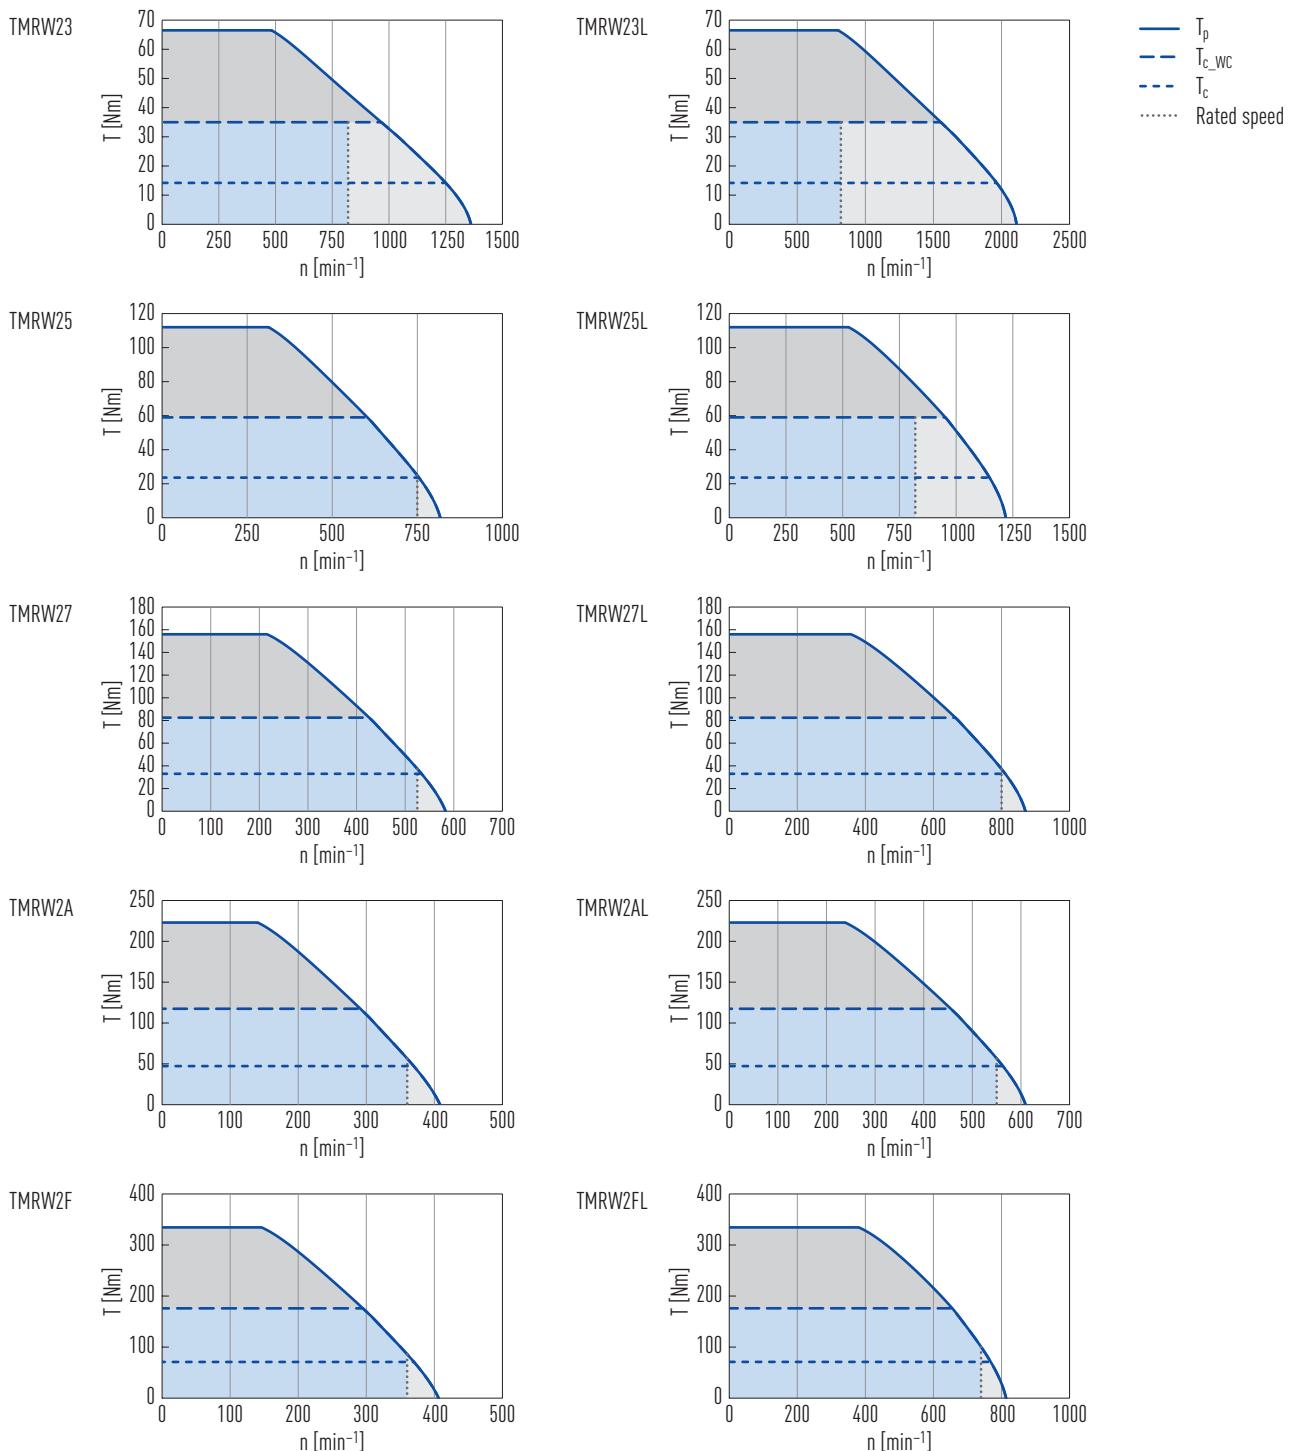


Table 4.2 Technical data for TMRW2

	Symbol	Unit	TMRW23	TMRW23L	TMRW25	TMRW25L	TMRW27	TMRW27L	TMRW2A	TMRW2AL	TMRW2F	TMRW2FL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	66.5		112.0		156.0		223.0		334.5	
Continuous torque¹⁾	T _c	Nm	14.2		23.6		33.0		47.3		71.0	
Continuous torque (WC)	T _{c_WC}	Nm	35.0		59.0		82.5		117.5		176.0	
Stall torque	T _s	Nm	10		17		23		33		50	
Stall torque (WC)	T _{s_WC}	Nm	25		41		58		82		123	
Peak current (for 1 sec.)	I _p	A	22.3	33.2	22.3	33.2	22.3	33.2	22.3	33.2	33.2	66.4
Continuous current¹⁾	I _c	A	3.3	4.9	3.3	4.9	3.3	4.9	3.3	4.9	4.9	9.9
Continuous current (WC)	I _{c_WC}	A	8.3	12.3	8.3	12.3	8.3	12.3	8.3	12.3	12.3	24.6
Stall current	I _s	A	2.3	3.4	2.3	3.4	2.3	3.4	2.3	3.4	3.4	6.9
Stall current (WC)	I _{s_WC}	A	5.8	8.6	5.8	8.6	5.8	8.6	5.8	8.6	8.6	17.2
Resistance²⁾	R ₂₅	Ω	4.3	1.9	5.7	2.5	7.8	3.5	9.6	4.4	6.0	1.5
Inductance²⁾	L ₂₅	mH	27.50	11.50	39.00	16.23	50.70	22.72	70.80	32.46	47.00	10.40
Motor constant	K _m	Nm/√W	1.68	1.72	2.45	2.49	2.92	2.94	3.78	3.76	4.83	4.78
Electrical time constant	K _e	ms	6.4	6.1	6.8	6.5	6.5	6.5	7.4	7.4	7.8	6.9
Torque constant	K _t	Nm/A	4.29	2.80	7.16	4.80	10.03	6.72	14.32	9.60	14.39	7.20
Back emf constant	K _u	V _{eff} /(rad/s)	2.48	1.60	4.13	2.77	5.79	3.88	8.27	5.54	8.31	4.15
Inertia of rotor	J	kgm ²	0.0027		0.0045		0.0063		0.0090		0.0130	
Thermal resistance	R _{th}	°C/W	1.35	1.39	1.02	1.06	0.75	0.75	0.61	0.53	0.44	0.43
Thermal resistance (WC)	R _{th_WC}	°C/W	0.214	0.220	0.161	0.167	0.118	0.120	0.096	0.095	0.07	0.07
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_c	n	min ⁻¹	1,260	1,900	750	1,130	525	800	360	550	360	740
Max. speed at T_{c_WC}	n	min ⁻¹	1,060	1,600	610	950	420	660	280	440	275	610
Max. speed at T_p	n	min ⁻¹	590	900	330	525	210	360	125	225	120	330
Rated speed	n _N	min ⁻¹	820	820	750	820	530	810	360	560	370	760
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H _S	mm	80		100		120		150		200	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	0.95		1.60		2.20		3.20		4.80	
Stator mass	M _s	kg	6.1		8.4		10.2		14.2		20.1	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

WC: with water cooling


¹⁾ Coil temperature: 120 °C

²⁾ Line to line


Torque Motors

HIWIN torque motors TMRW


Dimensions TMRW2

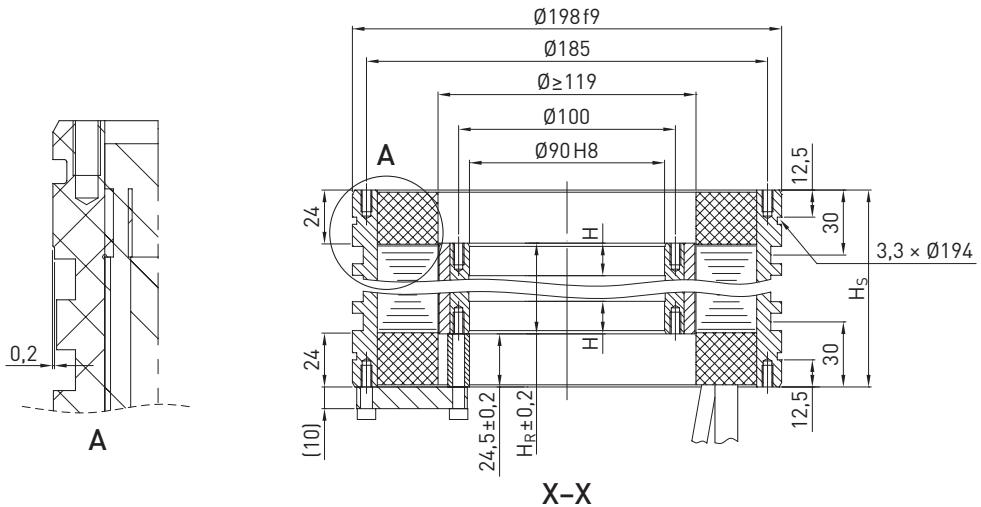

TMRW23, TMRW25, TMRW27

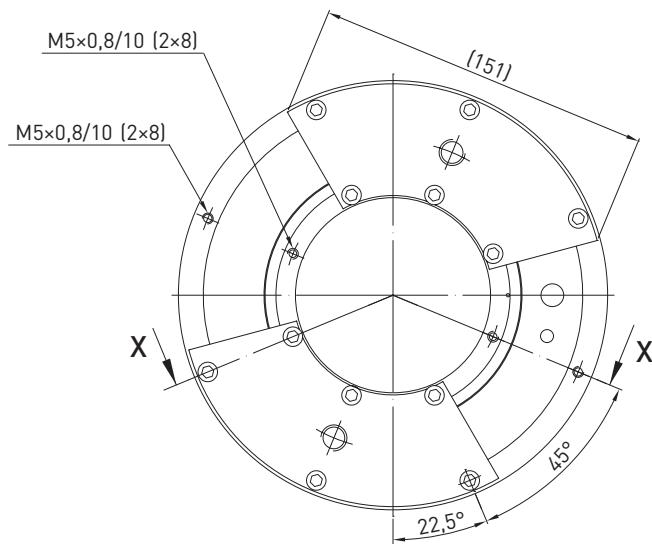


TMRW2A, TMRW2F

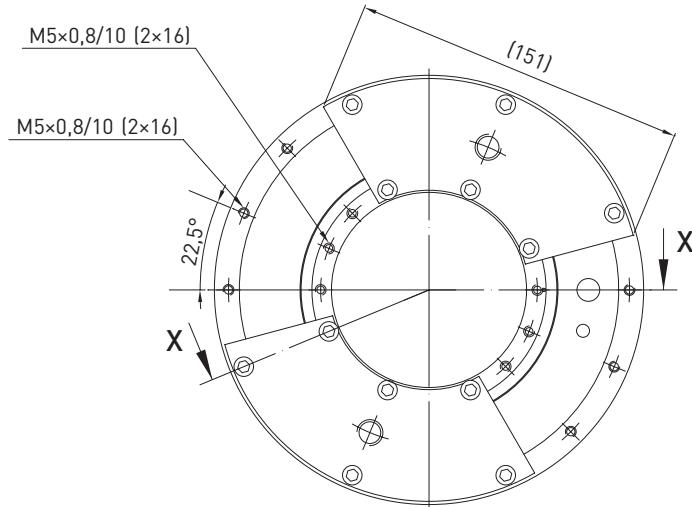

4.4.3 TMRW4 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

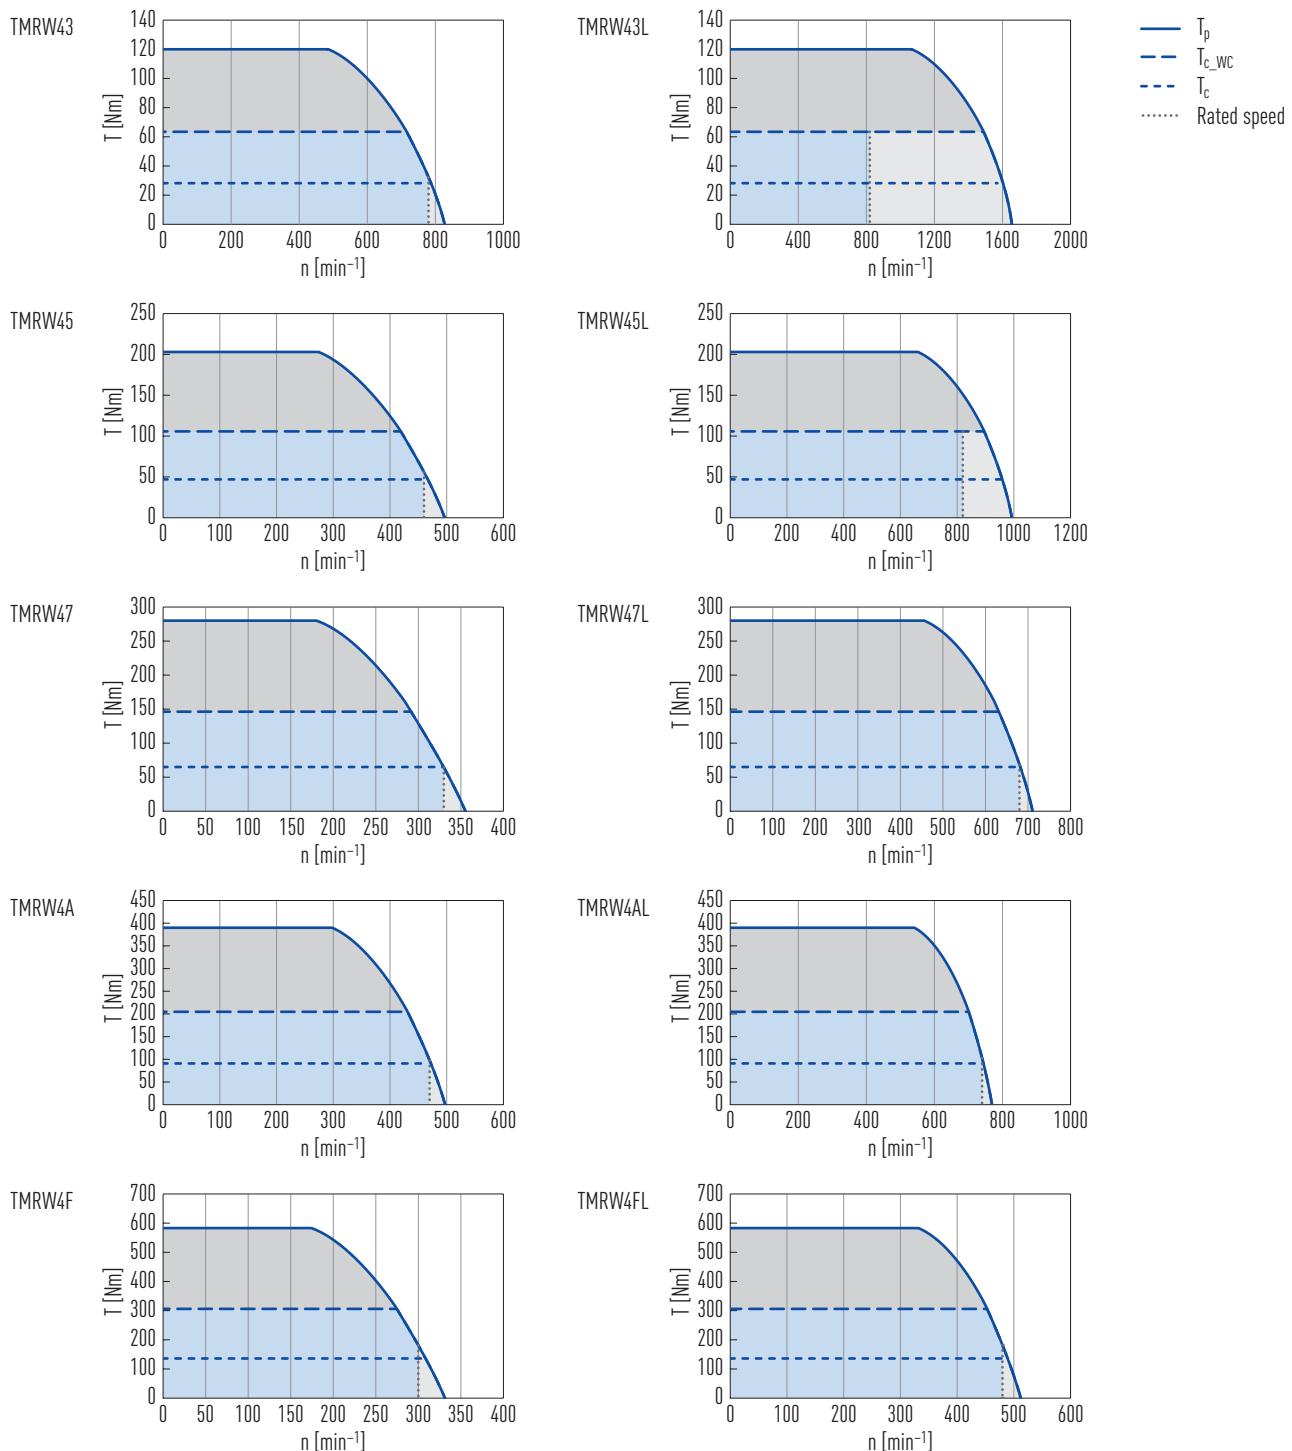

Torque Motors

HIWIN torque motors TMRW

Table 4.3 Technical data for TMRW4

	Symbol	Unit	TMRW43	TMRW43L	TMRW45	TMRW45L	TMRW47	TMRW47L	TMRW4A	TMRW4AL	TMRW4F	TMRW4FL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	120		203		280		390		583	
Continuous torque¹⁾	T_c	Nm	28.2		47.0		65.0		91.0		136.0	
Continuous torque (WC)	T_{c_WC}	Nm	63.5		106.0		148.0		205.0		307.0	
Stall torque	T_s	Nm	20		33		46		64		95	
Stall torque (WC)	T_{s_WC}	Nm	44		74		104		144		215	
Peak current (for 1 sec.)	I_p	A	24.3	48.6	24.3	48.6	24.3	48.6	48.6	72.9	48.6	72.9
Continuous current¹⁾	I_c	A	4	8	4	8	4	8	8	12	8	12
Continuous current (WC)	I_{c_WC}	A	9	18	9	18	9	18	18	27	18	27
Stall current	I_s	A	2.8	5.6	2.8	5.6	2.8	5.6	5.6	8.4	5.6	8.4
Stall current (WC)	I_{s_WC}	A	6.3	12.6	6.3	12.6	6.3	12.6	12.6	18.9	12.6	18.9
Resistance²⁾	R_{25}	Ω	4.38	1.10	6.01	1.50	7.63	1.90	2.50	1.06	3.66	1.58
Inductance²⁾	L_{25}	mH	17.90	4.50	28.00	6.38	37.60	8.93	13.00	4.57	19.13	6.90
Motor constant	K_m	Nm/ \sqrt{W}	2.75	2.74	3.91	3.92	4.80	4.81	5.87	6.01	7.26	7.36
Electrical time constant	K_e	ms	4.1	4.1	4.7	4.3	4.9	4.7	5.2	4.3	5.2	4.4
Torque constant	K_t	Nm/A	7.06	3.53	11.76	5.88	16.47	8.23	11.76	7.61	17.65	11.42
Back emf constant	K_u	$V_{eff}/(rad/s)$	4.08	2.04	6.80	3.40	9.50	4.75	6.79	4.39	10.19	6.59
Inertia of rotor	J	kgm^2	0.0085		0.0140		0.0220		0.0290		0.0450	
Thermal resistance	R_{th}	$^{\circ}C/W$	0.90	0.90	0.66	0.66	0.52	0.52	0.40	0.41	0.27	0.28
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.179	0.178	0.130	0.130	0.102	0.103	0.078	0.082	0.053	0.055
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_c	n	min^{-1}	770	1,600	450	950	320	670	460	730	300	470
Max. speed at T_{c_WC}	n	min^{-1}	710	1,500	410	890	290	620	420	680	260	440
Max. speed at T_p	n	min^{-1}	500	1,100	270	660	180	450	300	500	160	300
Rated speed	n_N	min^{-1}	780	820	460	820	330	680	470	740	300	480
Mechanical parameters												
Number of poles	$2p$		22									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H_S	mm	70		90		110		140		190	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	1.4		2.4		3.3		4.7		7.1	
Stator mass	M_s	kg	5.8		7.8		9.6		12.7		18.7	


All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature

WC: with water cooling


¹⁾ Coil temperature: $120^{\circ}C$

²⁾ Line to line


Dimensions TMRW4

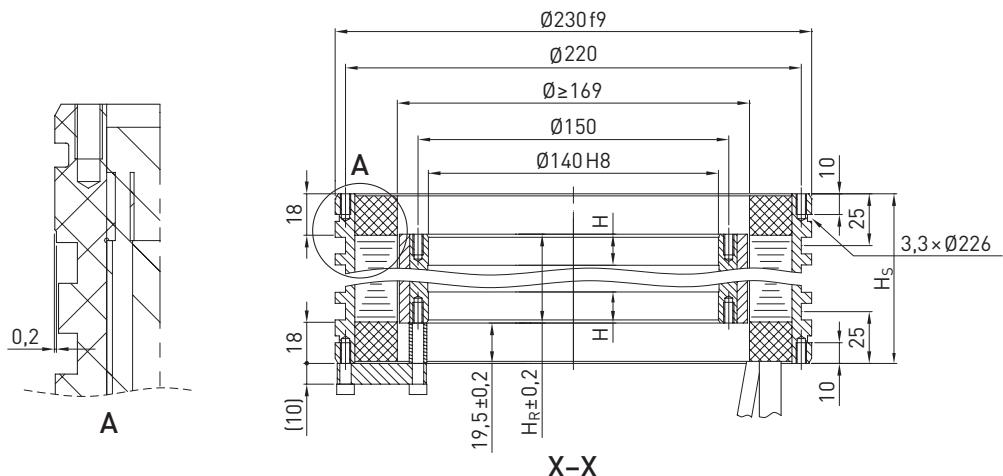

TMRW43, TMRW45

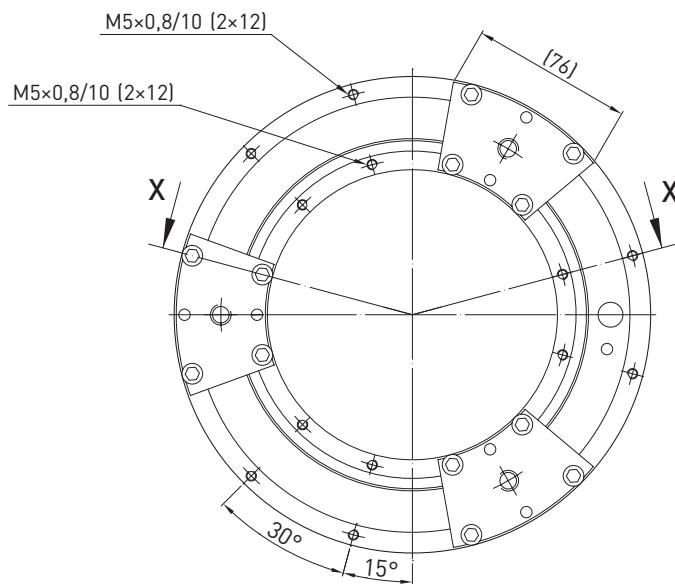

TMRW47, TMRW4A, TMRW4F

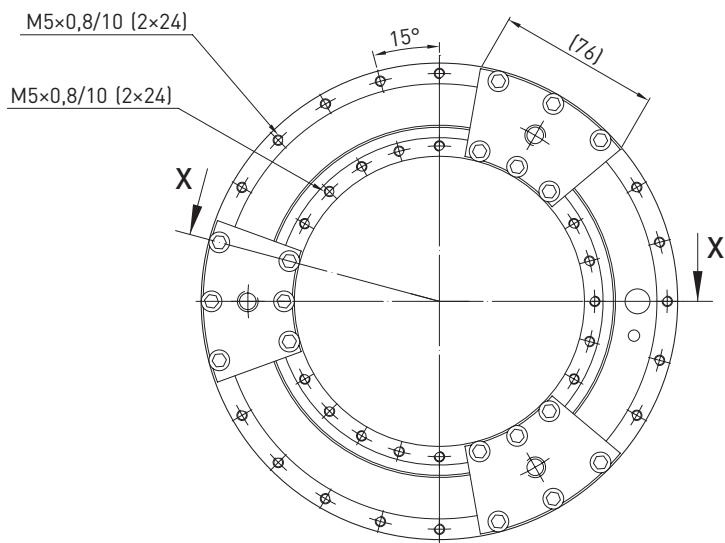

Torque Motors

HIWIN torque motors TMRW

4.4.4 TMRW7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

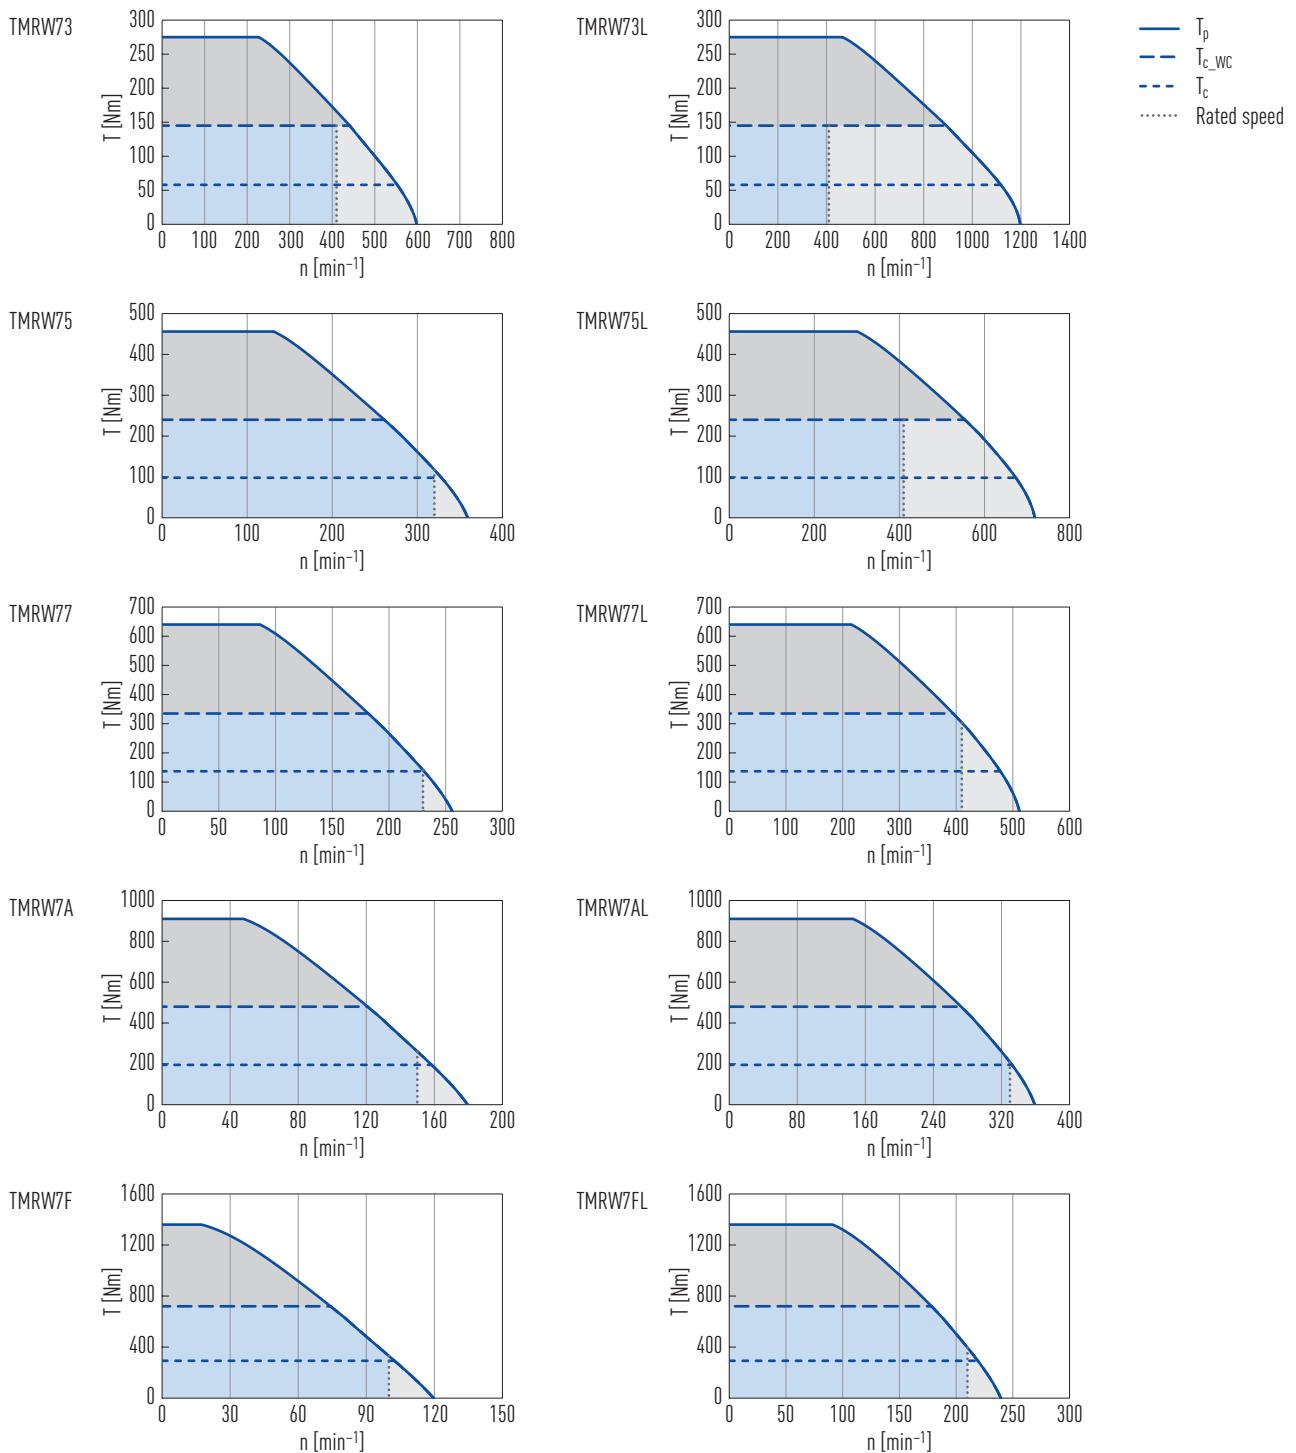


Table 4.4 Technical data for TMRW7

	Symbol	Unit	TMRW73	TMRW73L	TMRW75	TMRW75L	TMRW77	TMRW77L	TMRW7A	TMRW7AL	TMRW7F	TMRW7FL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	275		456		640		910		1,360	
Continuous torque¹⁾	T_c	Nm	58		98		137		195		293	
Continuous torque (WC)	T_{c_WC}	Nm	145		240		335		480		720	
Stall torque	T_s	Nm	41		69		96		137		205	
Stall torque (WC)	T_{s_WC}	Nm	102		168		235		336		504	
Peak current (for 1 sec.)	I_p	A	40.5	81.0	40.5	81.0	40.5	81.0	40.5	81.0	40.5	81.0
Continuous current¹⁾	I_c	A	6	12	6	12	6	12	6	12	6	12
Continuous current (WC)	I_{c_WC}	A	15	30	15	30	15	30	15	30	15	30
Stall current	I_s	A	4.2	8.4	4.2	8.4	4.2	8.4	4.2	8.4	4.2	8.4
Stall current (WC)	I_{s_WC}	A	10.5	21.0	10.5	21.0	10.5	21.0	10.5	21.0	10.5	21.0
Resistance²⁾	R_{25}	Ω	3.00	0.81	4.19	1.05	5.52	1.38	7.52	1.88	10.00	2.50
Inductance²⁾	L_{25}	mH	15.00	4.00	23.45	5.86	30.90	7.73	42.07	10.52	60.00	14.60
Motor constant	K_m	Nm/ \sqrt{W}	4.56	4.38	6.52	6.51	7.92	7.94	9.68	9.68	12.61	12.61
Electrical time constant	K_e	ms	5.0	4.9	5.6	5.6	5.6	5.6	5.6	5.6	6.0	5.8
Torque constant	K_t	Nm/A	9.77	4.89	16.3	8.15	22.8	11.4	32.56	16.28	48.85	24.45
Back emf constant	K_u	$V_{eff}/(rad/s)$	5.64	2.82	9.40	4.70	13.20	6.60	18.80	9.40	28.20	14.10
Inertia of rotor	J	kgm^2	0.023		0.039		0.059		0.079		0.110	
Thermal resistance	R_{th}	$^{\circ}C/W$	0.59	0.54	0.42	0.42	0.32	0.32	0.23	0.23	0.18	0.18
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.094	0.087	0.067	0.067	0.051	0.051	0.037	0.037	0.028	0.028
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_c	n	min^{-1}	560	1,110	325	675	225	475	160	325	100	210
Max. speed at T_{c_WC}	n	min^{-1}	470	890	270	580	180	400	115	275	72	170
Max. speed at T_p	n	min^{-1}	270	460	150	340	90	230	50	150	13	85
Rated speed	n_N	min^{-1}	410	410	320	410	230	410	150	330	100	210
Mechanical parameters												
Number of poles	$2p$		44									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H_S	mm	80		100		120		150		200	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	2.5		4.1		5.7		8.1		12.1	
Stator mass	M_s	kg	14.2		18.9		23.7		30.9		43.6	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25°C ambient temperature

WC: with water cooling


¹⁾ Coil temperature: 120°C

²⁾ Line to line


Torque Motors

HIWIN torque motors TMRW


Dimensions TMRW7

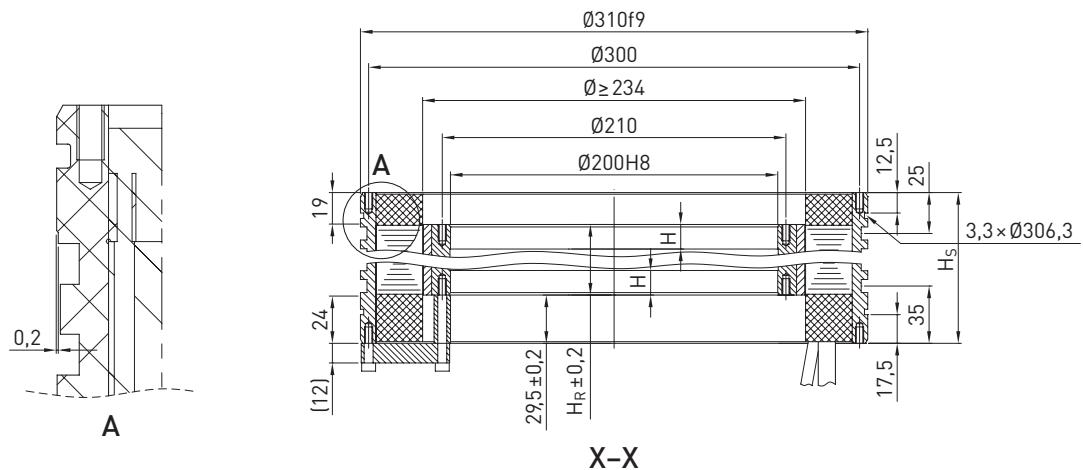

TMRW73, TMRW75, TMRW77

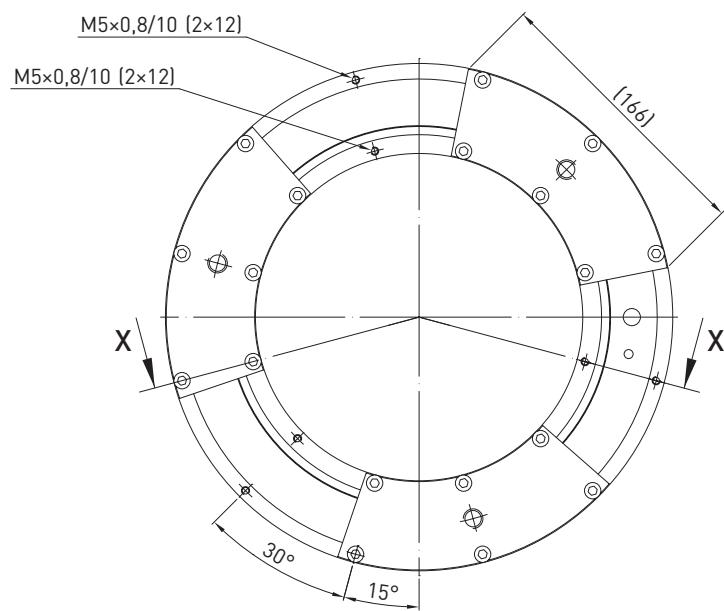


TMRW7A, TMRW7F

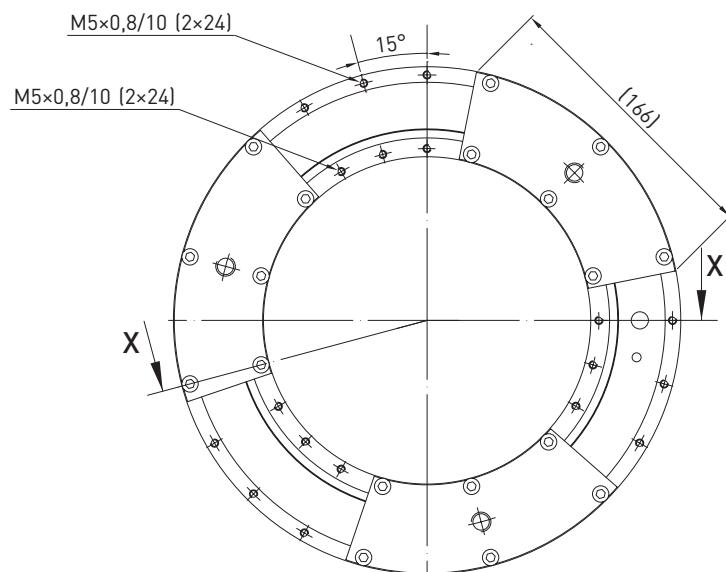

4.4.5 TMRWA specifications

Torque-speed curves (DC bus voltage: 600 VDC)

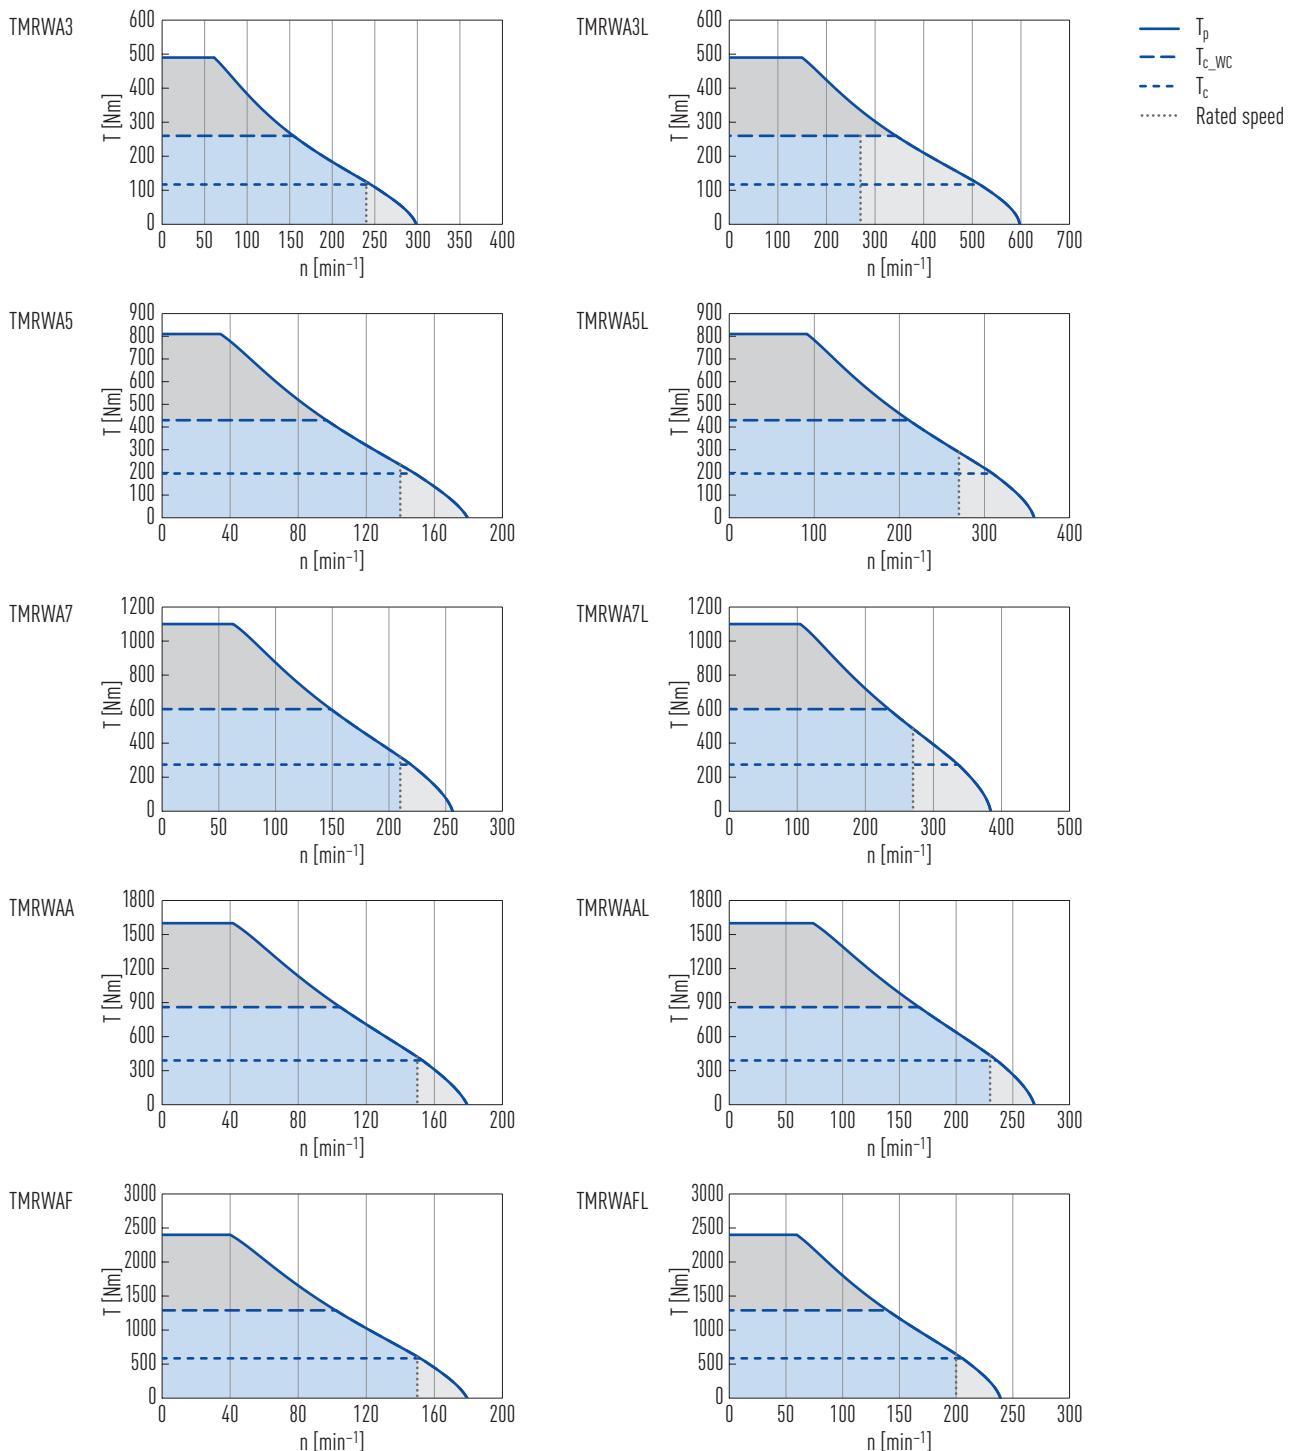

Torque Motors

HIWIN torque motors TMRW

Table 4.5 Technical data for TMRWA


	Symbol	Unit	TMRWA3	TMRWA3L	TMRWA5	TMRWA5L	TMRWA7	TMRWA7L	TMRWAA	TMRWAAL	TMRWAF	TMRWAFL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T_p	Nm	490		810		1,100		1,600		2,400	
Continuous torque¹⁾	T_c	Nm	117		195		274		390		585	
Continuous torque (WC)	T_{c_WC}	Nm	260		430		600		860		1,290	
Stall torque	T_s	Nm	82		137		192		273		410	
Stall torque (WC)	T_{s_WC}	Nm	182		301		420		602		903	
Peak current (for 1 sec.)	I_p	A	40.5	81.0	40.5	81.0	81.0	121.5	81.0	121.5	121.5	162.0
Continuous current¹⁾	I_c	A	6	12	6	12	12	18	12	18	18	24
Continuous current (WC)	I_{c_WC}	A	15	30	15	30	30	45	30	45	45	60
Stall current	I_s	A	4.2	8.4	4.2	8.4	8.4	12.6	8.4	12.6	12.6	16.8
Stall current (WC)	I_{s_WC}	A	10.5	21.0	10.5	21.0	21.0	31.5	21.0	31.5	31.5	42.0
Resistance²⁾	R_{25}	Ω	4.80	0.89	7.10	1.78	2.20	0.98	2.97	1.32	1.98	1.00
Inductance²⁾	L_{25}	mH	38.15	8.93	53.40	13.35	18.50	8.00	24.20	10.50	17.00	10.00
Motor constant	K_m	Nm/ \sqrt{W}	7.27	8.44	9.96	9.94	12.57	12.56	15.40	15.40	18.86	19.90
Electrical time constant	K_e	ms	7.9	10.0	7.5	7.5	8.4	8.2	8.1	8.0	8.6	10.0
Torque constant	K_t	Nm/A	19.57	9.79	32.60	16.32	22.84	15.23	32.63	21.75	32.63	24.45
Back emf constant	K_u	$V_{eff}/(rad/s)$	11.30	5.65	18.80	9.42	13.18	8.79	18.83	12.55	18.83	14.12
Inertia of rotor	J	kgm^2	0.065		0.100		0.150		0.210		0.320	
Thermal resistance	R_{th}	$^{\circ}C/W$	0.37	0.49	0.25	0.25	0.20	0.20	0.15	0.15	0.10	0.11
Thermal resistance (WC)	R_{th_WC}	$^{\circ}C/W$	0.059	0.079	0.040	0.040	0.032	0.032	0.024	0.024	0.016	0.018
Max. DC bus voltage	U_{max}	VDC	750									
Max. speed at T_c	n	min^{-1}	250	510	140	300	210	320	140	220	140	200
Max. speed at T_{c_WC}	n	min^{-1}	160	340	90	200	135	210	90	140	92	125
Max. speed at T_p	n	min^{-1}	65	150	35	80	55	90	35	60	35	50
Rated speed	n_N	min^{-1}	240	270	140	270	210	270	150	230	150	200
Mechanical parameters												
Number of poles	$2p$		66									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H_S	mm	90		110		130		160		210	
Rotor height	H_R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M_r	kg	3.1		5.1		7.1		10.2		15.3	
Stator mass	M_s	kg	20.1		26.8		34.5		44.9		63.1	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at $25^{\circ}C$ ambient temperature


WC: with water cooling

¹⁾ Coil temperature: $120^{\circ}C$


²⁾ Line to line

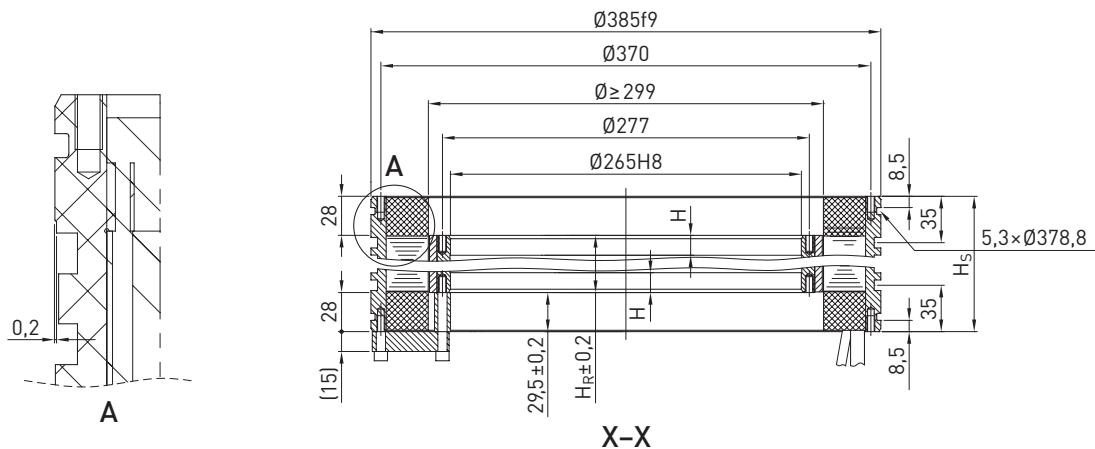Dimensions TMRWA


TMRWA3, TMRWA5, TMRWA7

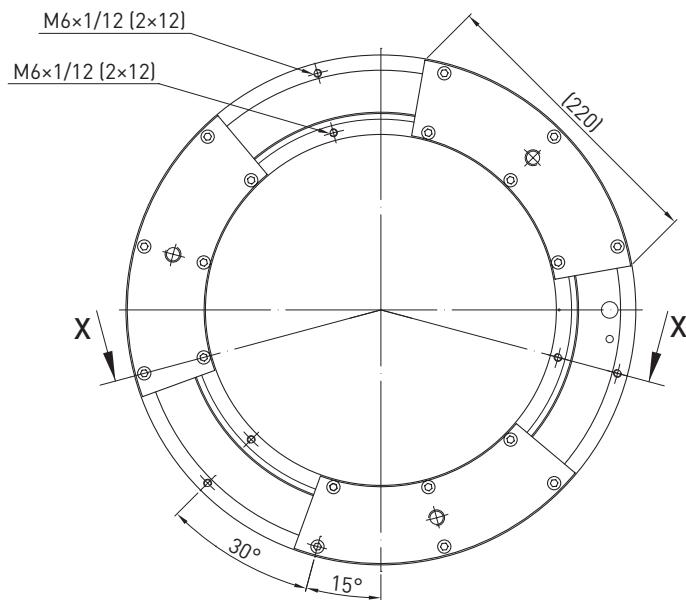

TMRWAA, TMRWAF

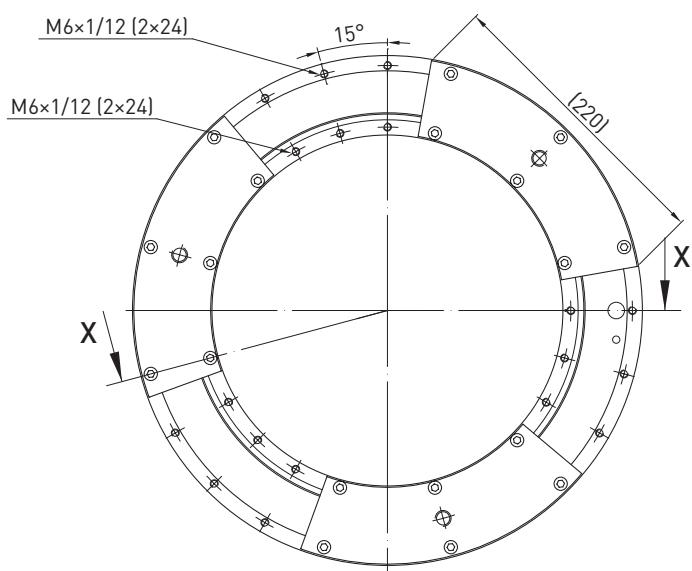

Torque Motors

HIWIN torque motors TMRW

4.4.6 TMRWD specifications

Torque-speed curves (DC bus voltage: 600 VDC)

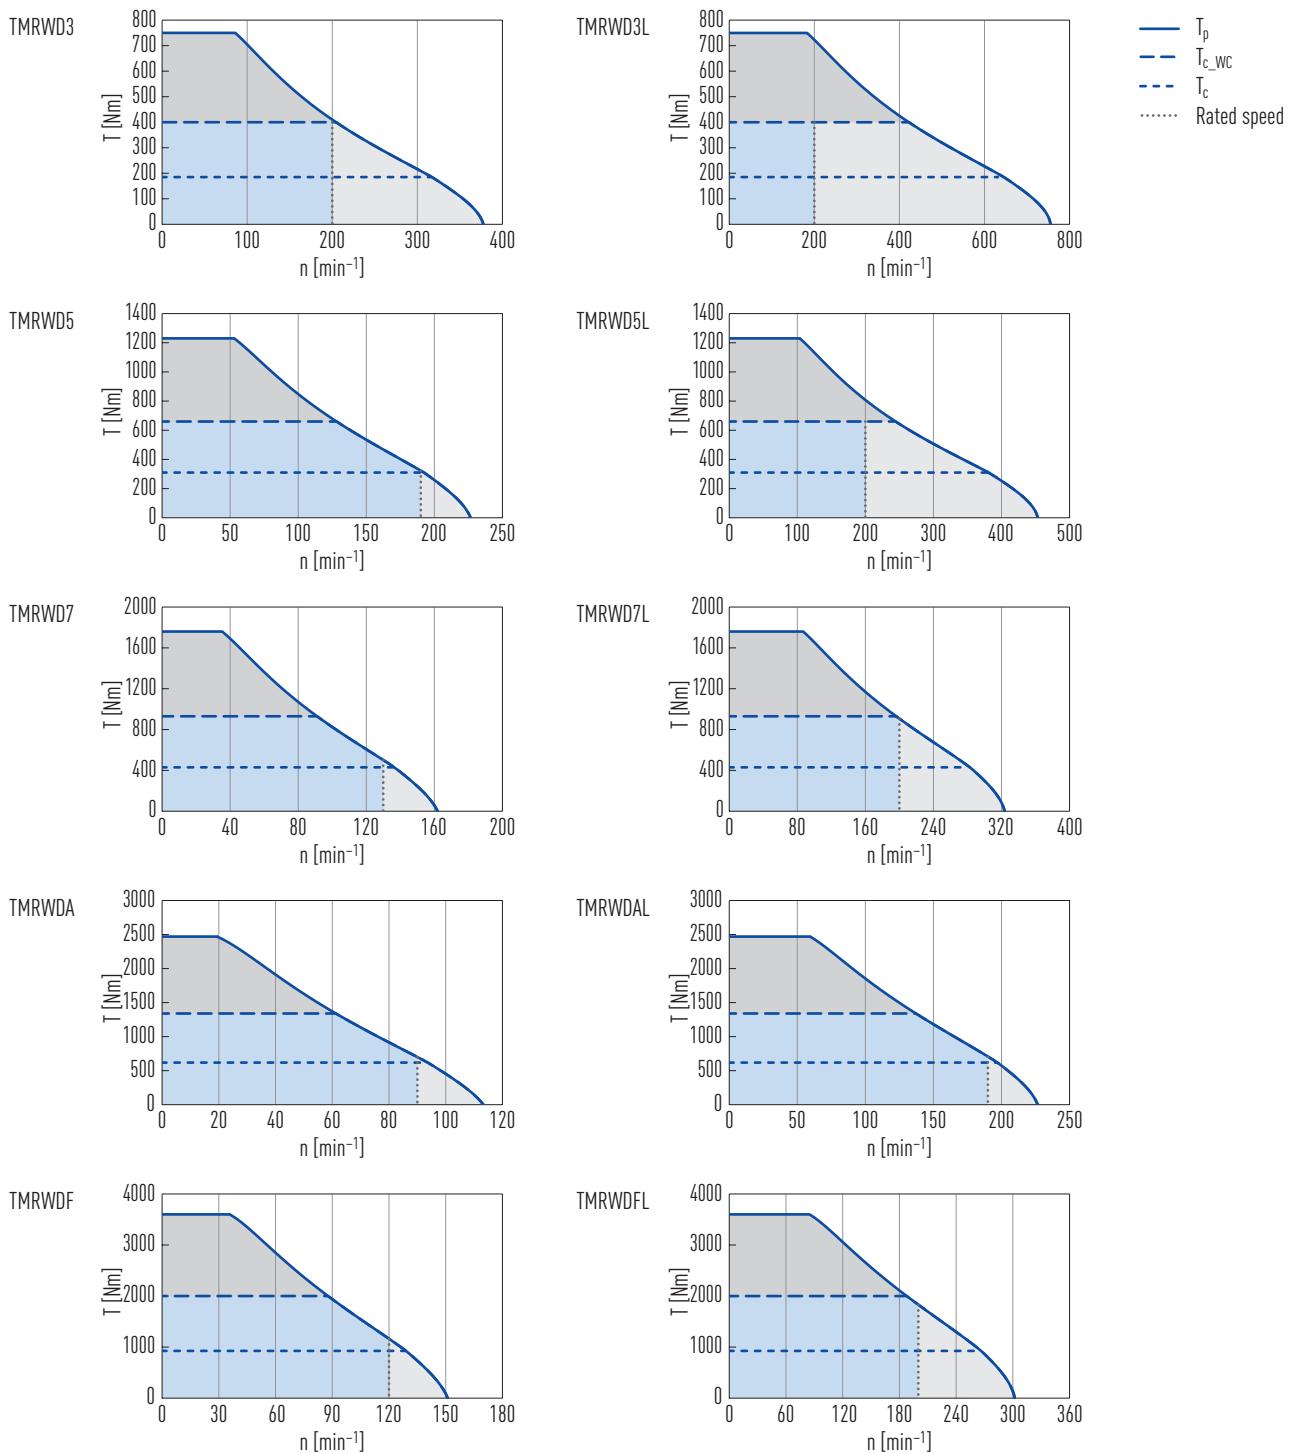


Table 4.6 Technical data for TMRWD

	Symbol	Unit	TMRWD3	TMRWD3L	TMRWD5	TMRWD5L	TMRWD7	TMRWD7L	TMRWDA	TMRWDAL	TMRWDF	TMRWDFL
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	750		1,230		1,760		2,470		3,600	
Continuous torque¹⁾	T _c	Nm	185		310		430		619		925	
Continuous torque (WC)	T _{c_WC}	Nm	400		660		930		1,340		2,000	
Stall torque	T _s	Nm	130		217		301		433		648	
Stall torque (WC)	T _{s_WC}	Nm	280		462		651		938		1,400	
Peak current (for 1 sec.)	I _p	A	81	162	81	162	81	162	81	162	162	324
Continuous current¹⁾	I _c	A	12	24	12	24	12	24	12	24	24	48
Continuous current (WC)	I _{c_WC}	A	30	60	30	60	30	60	30	60	60	120
Stall current	I _s	A	8.4	16.8	8.4	16.8	8.4	16.8	8.4	16.8	16.8	33.6
Stall current (WC)	I _{s_WC}	A	21	42	21	42	21	42	21	42	42	84
Resistance²⁾	R ₂₅	Ω	1.57	0.39	2.31	0.59	3.04	0.76	4.14	1.04	1.35	0.33
Inductance²⁾	L ₂₅	mH	11.13	2.78	16.30	4.78	21.50	5.38	29.30	7.33	11.20	2.80
Motor constant	K _m	Nm/√W	10.05	10.08	13.88	13.73	16.78	16.78	20.70	20.65	27.08	27.39
Electrical time constant	K _e	ms	7.1	7.1	7.1	8.1	7.1	7.1	7.1	7.0	8.3	8.5
Torque constant	K _t	Nm/A	15.48	7.74	25.80	12.90	36.11	18.10	51.60	25.80	38.70	19.35
Back emf constant	K _u	V _{eff} /(rad/s)	8.94	4.47	14.90	7.45	20.85	10.43	29.80	14.90	22.35	11.18
Inertia of rotor	J	kgm ²	0.16		0.26		0.37		0.53		0.80	
Thermal resistance	R _{th}	°C/W	0.28	0.28	0.19	0.19	0.14	0.14	0.11	0.11	0.08	0.08
Thermal resistance (WC)	R _{th_WC}	°C/W	0.045	0.045	0.030	0.030	0.023	0.023	0.017	0.017	0.013	0.013
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_c	n	min ⁻¹	300	630	180	390	130	275	90	190	125	260
Max. speed at T_{c_WC}	n	min ⁻¹	200	420	120	250	85	190	60	133	80	190
Max. speed at T_p	n	min ⁻¹	85	175	50	115	30	85	18	60	30	80
Rated speed	n _N	min ⁻¹	200	200	190	200	130	200	90	190	120	200
Mechanical parameters												
Number of poles	2p		88									
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000									
Stator height	H _S	mm	90		110		130		160		210	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	5.5		9.2		12.8		18.3		22.0	
Stator mass	M _s	kg	22.8		38.0		53.2		76.0		90.0	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

WC: with water cooling


¹⁾ Coil temperature: 120 °C;

²⁾ Line to line


Torque Motors

HIWIN torque motors TMRW


Dimensions TMRWD

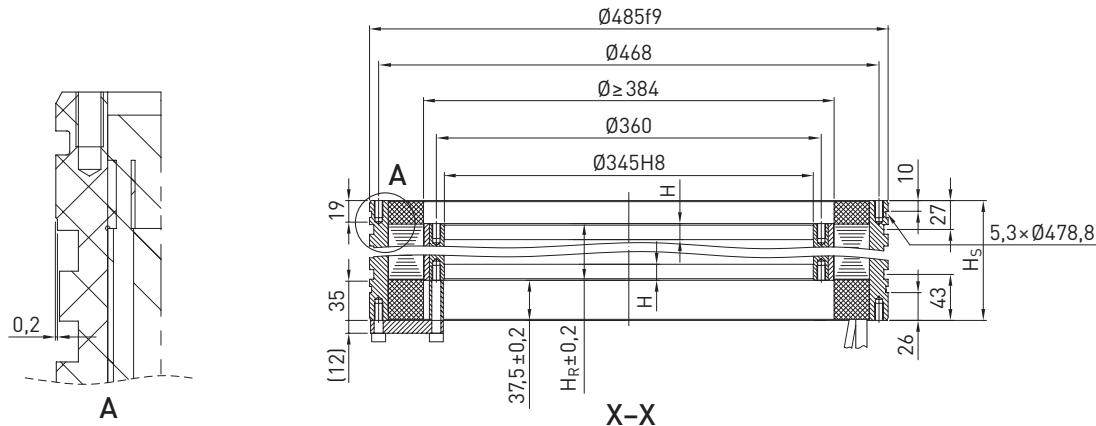

TMRWD3, TMRWD5, TMRWD7

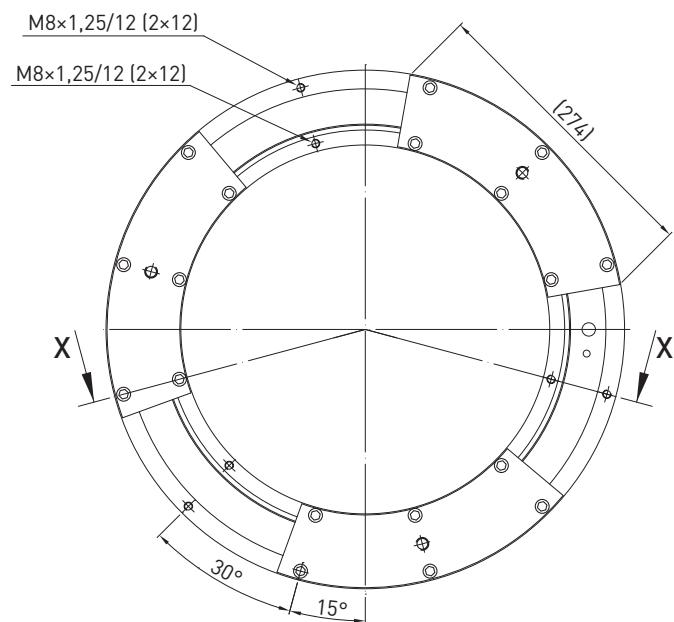


TMRWDA, TMRWDF

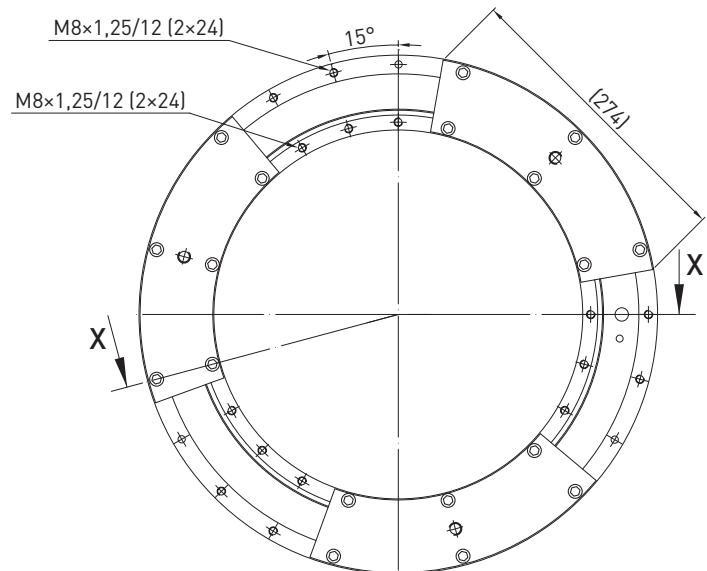

4.4.7 TMRWG specifications

Torque-speed curves (DC bus voltage: 600 VDC)

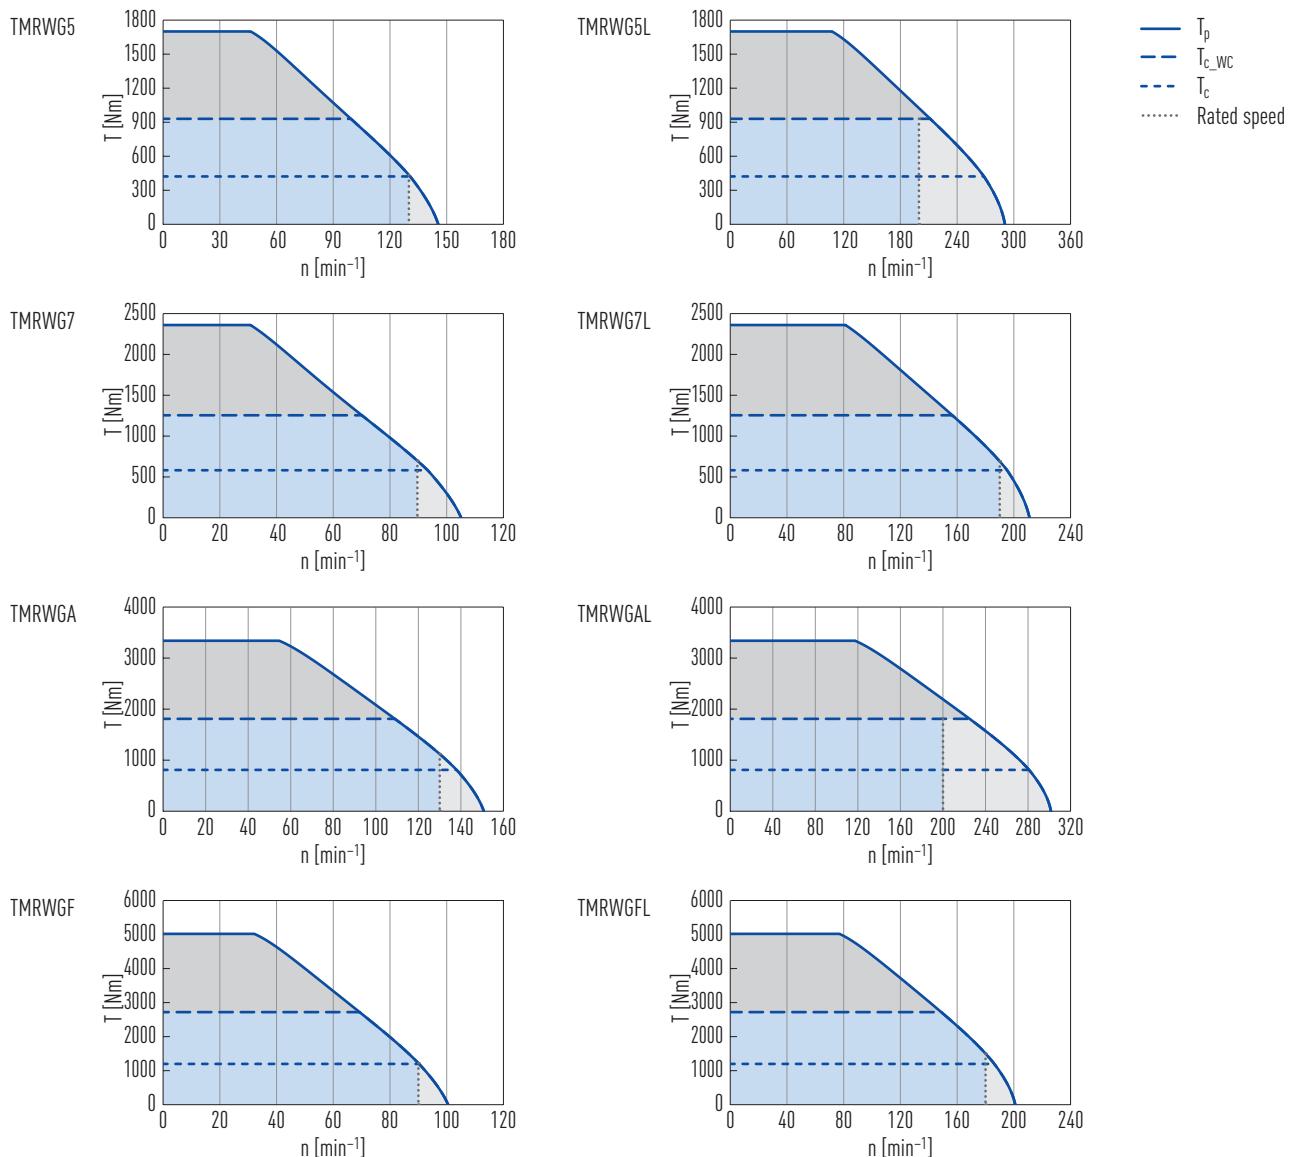

Torque Motors

HIWIN torque motors TMRW

Table 4.7 Technical data for TMRWG



	Symbol	Unit	TMRWG5	TMRWG5L	TMRWG7	TMRWG7L	TMRWGA	TMRWGAL	TMRWGF	TMRWGFL
Torques and electrical parameters										
Peak torque (for 1 sec.)	T_p	Nm	1,700		2,360		3,340		5,020	
Continuous torque¹⁾	T_c	Nm	422		582		810		1,200	
Continuous torque (WC)	T_{c_WC}	Nm	930		1,255		1,810		2,720	
Stall torque	T_s	Nm	295		407		567		840	
Stall torque (WC)	T_{s_WC}	Nm	651		879		1,267		1,904	
Peak current (for 1 sec.)	I_p	A	71	142	71	142	142	284	142	284
Continuous current¹⁾	I_c	A	10.5	21.0	10.5	21.0	21.0	42.0	21.0	42.0
Continuous current (WC)	I_{c_WC}	A	26.3	52.5	26.3	52.5	52.5	105.0	52.5	105.0
Stall current	I_s	A	7.4	14.7	7.4	14.7	14.7	29.4	14.7	29.4
Stall current (WC)	I_{s_WC}	A	18.4	36.8	18.4	36.8	36.8	73.5	36.8	73.5
Resistance²⁾	R_{25}	Ω	2.67	0.67	3.30	0.83	1.06	0.27	1.46	0.37
Inductance²⁾	L_{25}	mH	19.13	4.78	25.70	6.00	8.50	2.23	13.00	3.25
Motor constant	K_m	Nm/ \sqrt{W}	20.08	20.05	24.91	24.84	30.59	30.30	38.61	38.35
Electrical time constant	K_e	ms	7.2	7.1	7.8	7.2	8.0	8.3	8.9	8.8
Torque constant	K_t	Nm/A	40.2	20.1	55.4	27.7	38.8	19.4	57.0	28.5
Back emf constant	K_u	V _{eff} /(rad/s)	23.2	11.6	32.0	16.0	22.4	11.2	33.6	16.8
Inertia of rotor	J	kgm^2	0.452		0.619		0.904		1.380	
Thermal resistance	R_{th}	$^{\circ}\text{C}/\text{W}$	0.22	0.21	0.17	0.17	0.14	0.13	0.10	0.10
Thermal resistance (WC)	R_{th_WC}	$^{\circ}\text{C}/\text{W}$	0.034	0.034	0.028	0.028	0.022	0.021	0.016	0.016
Max. DC bus voltage	U_{max}	VDC	750							
Max. speed at T_c	n	min^{-1}	140	260	90	190	130	280	90	180
Max. speed at T_{c_WC}	n	min^{-1}	90	210	70	150	100	220	60	140
Max. speed at T_p	n	min^{-1}	40	100	30	80	50	110	30	70
Rated speed	n_N	min^{-1}	130	200	90	190	130	200	90	180
Mechanical parameters										
Number of poles	$2p$		88							
Thermal sensors			PTC SNM 100; PTC SNM 120; PT1000							
Stator height	H_S	mm	110		130		160		210	
Rotor height	H_R	mm	51		71		101		151	
Length of rotor centring fit	H	mm	15							
Rotor mass	M_r	kg	9.5		13.3		19.0		28.3	
Stator mass	M_s	kg	48.0		61.1		75.0		107.5	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25°C ambient temperature


WC: with water cooling

¹⁾ Coil temperature: 120°C ;


²⁾ Line to line

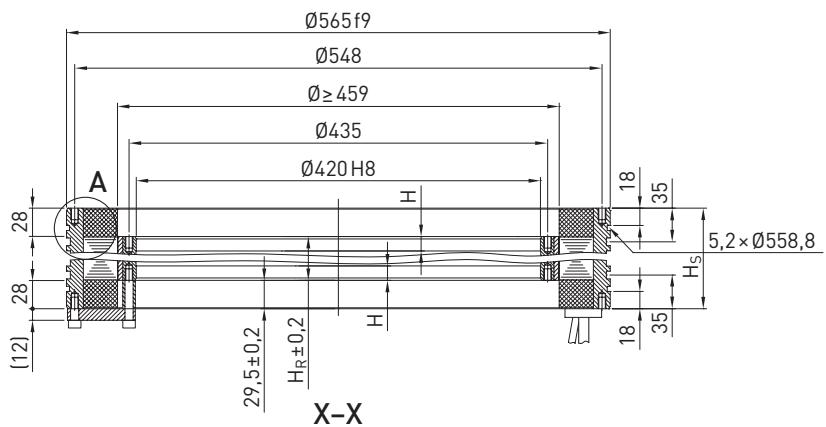Dimensions TMRWG


TMRWG5, TMRWG7

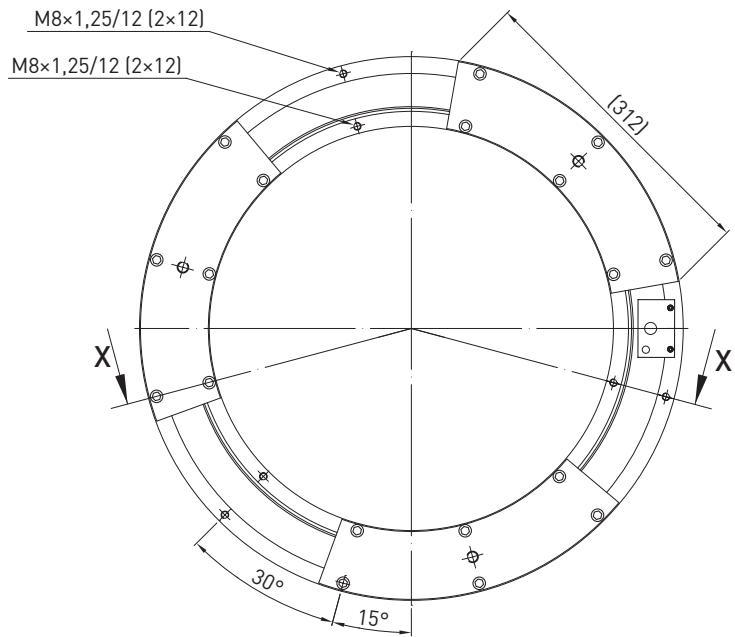

TMRWGA, TMRWGF

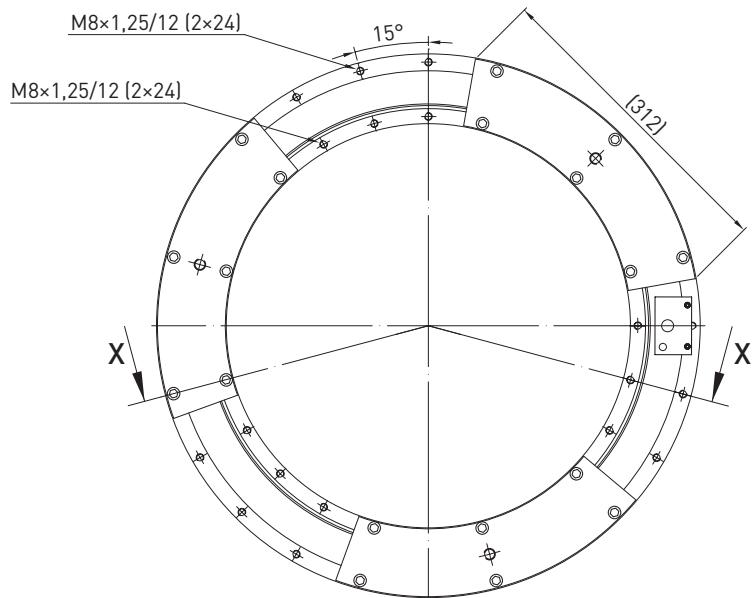

Torque Motors

HIWIN torque motors TM-2

5. HIWIN torque motors TM-2

5.1 Special characteristics of the torque motors TM-2

TM-2 series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for applications in machine tools.

Due to the integrated cooling channels, the torque motor can be operated with liquid cooling. No additional process heat is then introduced into the machine and higher continuous torques can be achieved.

The torque motors of the TM-2 series are based on the well-proven TMRW series. However, with identical dimensions, they are characterised by significantly higher torques as well as a reduced cogging moment.



Key features of the torque motors TM-2:

- Optimised for highest torques
- Wear- and maintenance-free direct drive
- Play-free and highly precise
- Prepared for liquid cooling
- UL-certified


Typical fields of application for the torque motors TM-2:

- Machine tools
- Servo presses
- Laser processing

5.2 Order code for torque motors TM-2

Series:	TM-2	7	5	SA0	1	20	S	00	Special equipment:
Outer diameter [mm]:	TM-2								00: Rotor and stator separately (standard) 03: Rotor and stator mounted with installation clamp
1: 160									
2: 198									
4: 230									
7: 310									
A: 385									
D: 485									
G: 565									
Rotor height [mm]:	30								
3: 30									
5: 50									
7: 70									
A: 100									
F: 150									
Winding variant	—								
Cable outlet orientation:									
S: Motor cables potted in the stator (standard)									
V: Type S with additional strain relief plate									
A: Type V with additional PG screw connections									
H: Type V with 90° cable outlet									
Cable length:									
05: 500									
10: 1,000									
20: 2,000 (standard)									
Thermal sensors:									
0: 3 × PTC100, 3 × PTC130, 1 × PT1000 (standard)									
1: 3 × PTC100, 3 × PTC130, 3 × PT1000									

5.3 TM-2 torques

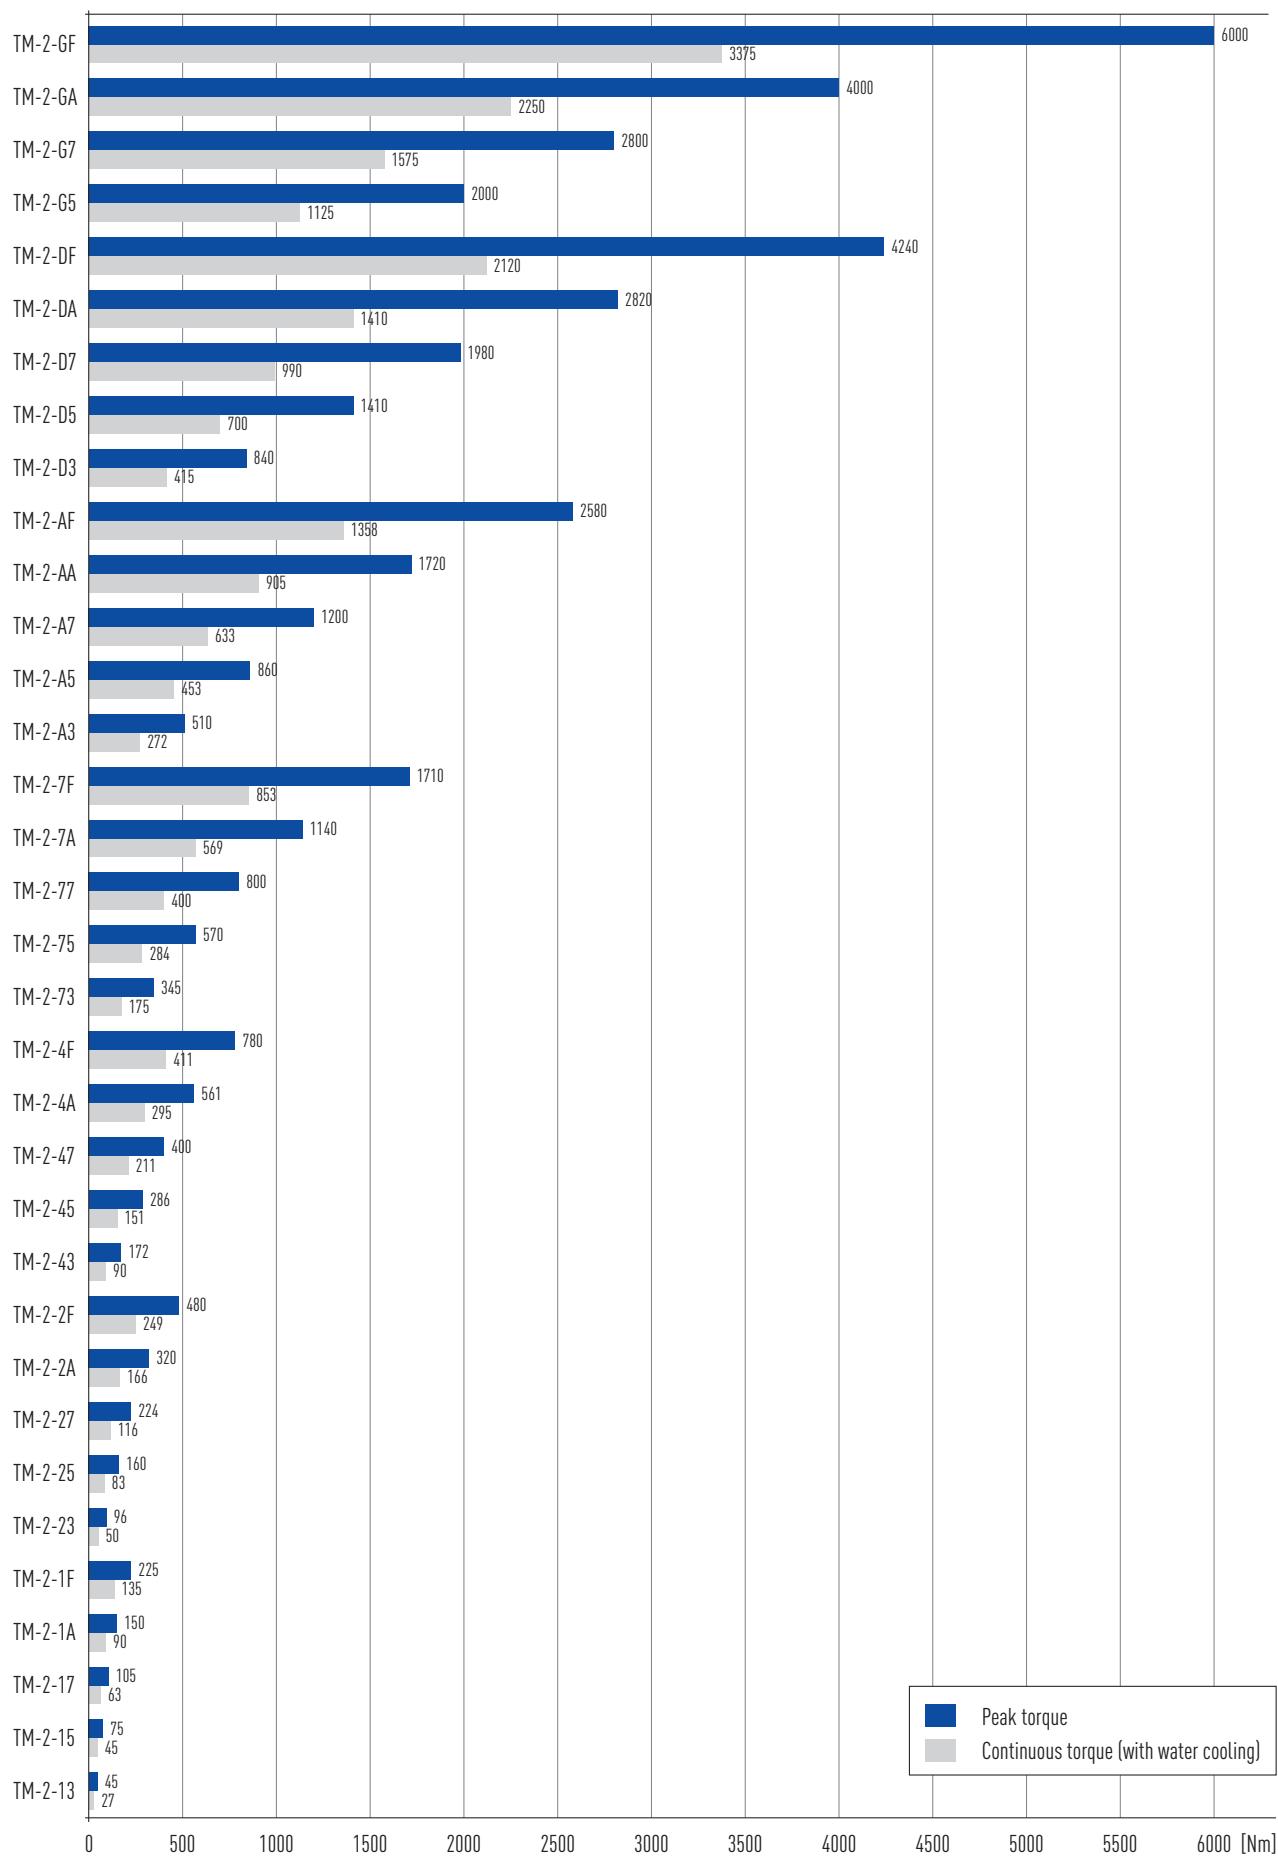

Torque Motors

HIWIN torque motors TM-2

5.4 Torque motor TM-2 specifications

5.4.1 TM-2-1 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

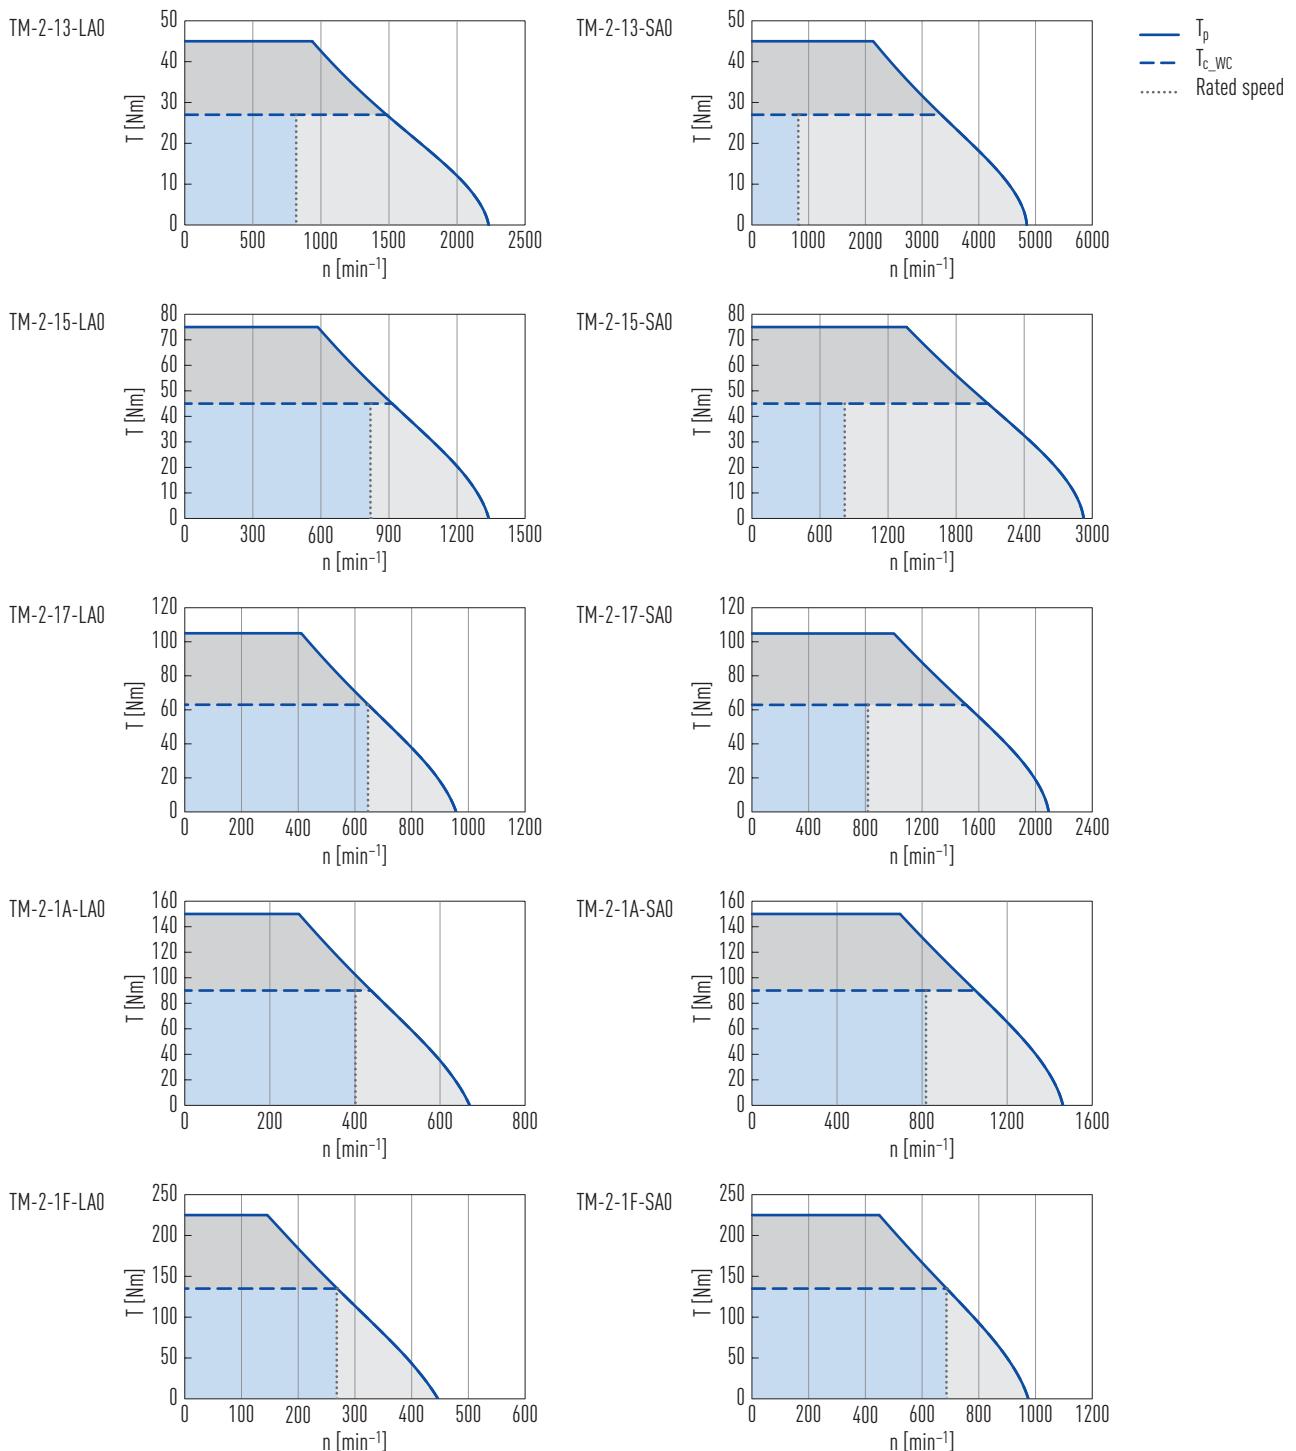


Table 5.1 Technical data for TM-2-1

	Symbol	Unit	TM-2-13-LAO	TM-2-13-SAO	TM-2-15-LAO	TM-2-15-SAO	TM-2-17-LAO	TM-2-17-SAO	TM-2-1A-LAO	TM-2-1A-SAO	TM-2-1F-LAO	TM-2-1F-LAO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	45		75		105		150		225	
Continuous torque (WC)	T _{c_WC}	Nm	27		45		63		90		135	
Stall torque (WC)	T _{s_WC}	Nm	22		37		52		74		111	
Peak current (for 1 sec.)	I _p	A	20.0	43.4	20.0	43.4	20.0	43.4	20.0	43.4	20.0	43.4
Continuous current (WC)	I _{c_WC}	A	10.3	22.3	10.3	22.3	10.3	22.3	10.3	22.3	10.3	22.3
Stall current (WC)	I _{s_WC}	A	8.2	17.8	8.2	17.8	8.2	17.8	8.2	17.8	8.2	17.8
Resistance ¹⁾	R ₂₅	Ω	3.5	0.7	5.1	1.1	6.8	1.4	9.2	2.0	13.3	2.8
Inductance ¹⁾	L ₂₅	mH	17.1	3.6	25.2	5.4	33.3	7.1	45.5	9.7	65.8	14.0
Motor constant	K _m	Nm/√W	1.25	1.26	1.72	1.68	2.09	2.09	2.57	2.49	3.20	3.16
Electrical time constant	K _e	ms	4.9	5.1	4.9	4.9	4.9	5.1	4.9	4.9	4.9	5.0
Torque constant	K _t	Nm/A	2.86	1.32	4.76	2.18	6.67	3.05	9.53	4.36	14.29	6.55
Back emf constant	K _u	V _{eff} /(rad/s)	1.65	0.76	2.75	1.26	3.85	1.76	5.50	2.52	8.25	3.78
Inertia of rotor	J	kgm ²	0.0010		0.0016		0.0023		0.0033		0.0049	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.189	0.201	0.129	0.128	0.097	0.101	0.072	0.070	0.050	0.050
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T _{c_WC}	n	min ⁻¹	1,482	3,338	913	2,080	646	1,510	401	1,049	268	686
Max. speed at T _p	n	min ⁻¹	935	2,138	585	1,362	410	1,001	245	695	145	448
Rated speed	n _N	min ⁻¹	818	818	818	818	646	818	401	818	268	686
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	70		90		110		140		190	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	0.7		1.2		1.6		2.3		3.5	
Stator mass	M _s	kg	4.5		6.4		8.0		11.1		16.0	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-1

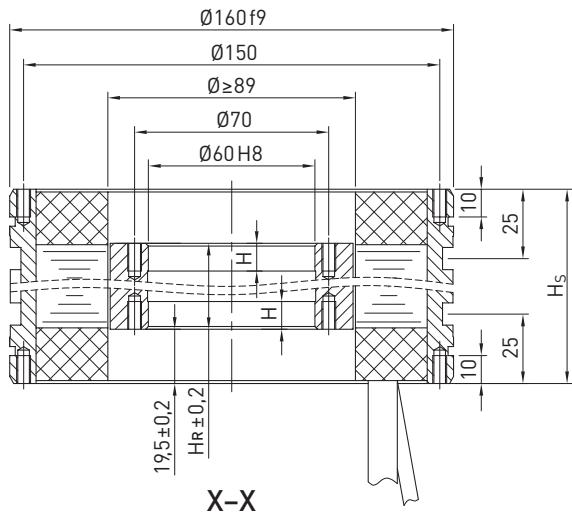

TM-2-13, TM-2-15, TM-2-17

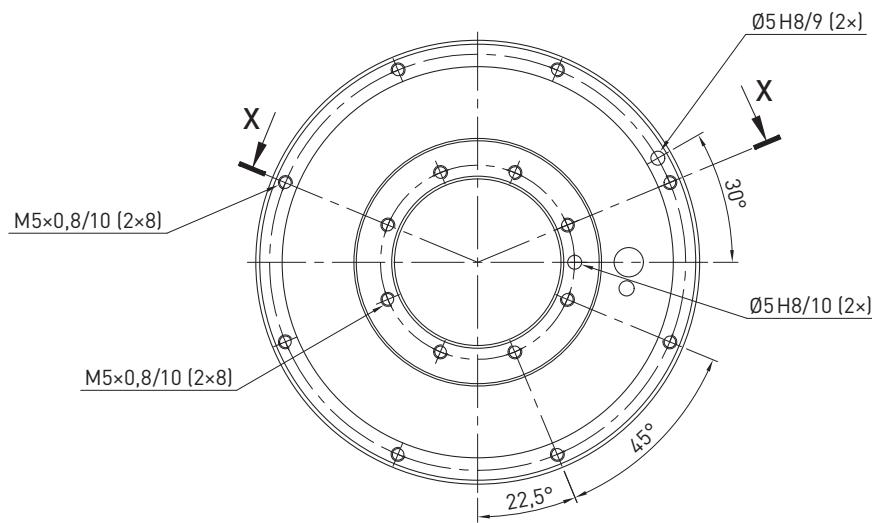


TM-2-1A, TM-2-1F

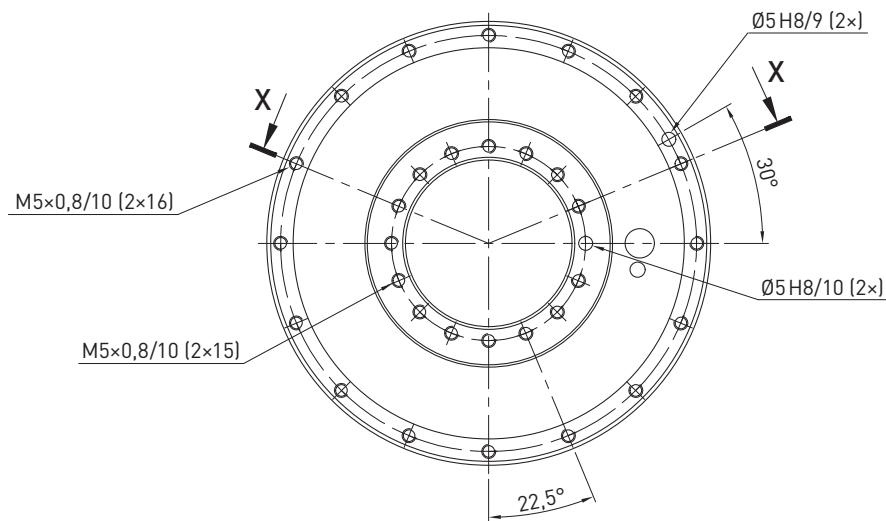

5.4.2 TM-2-2 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

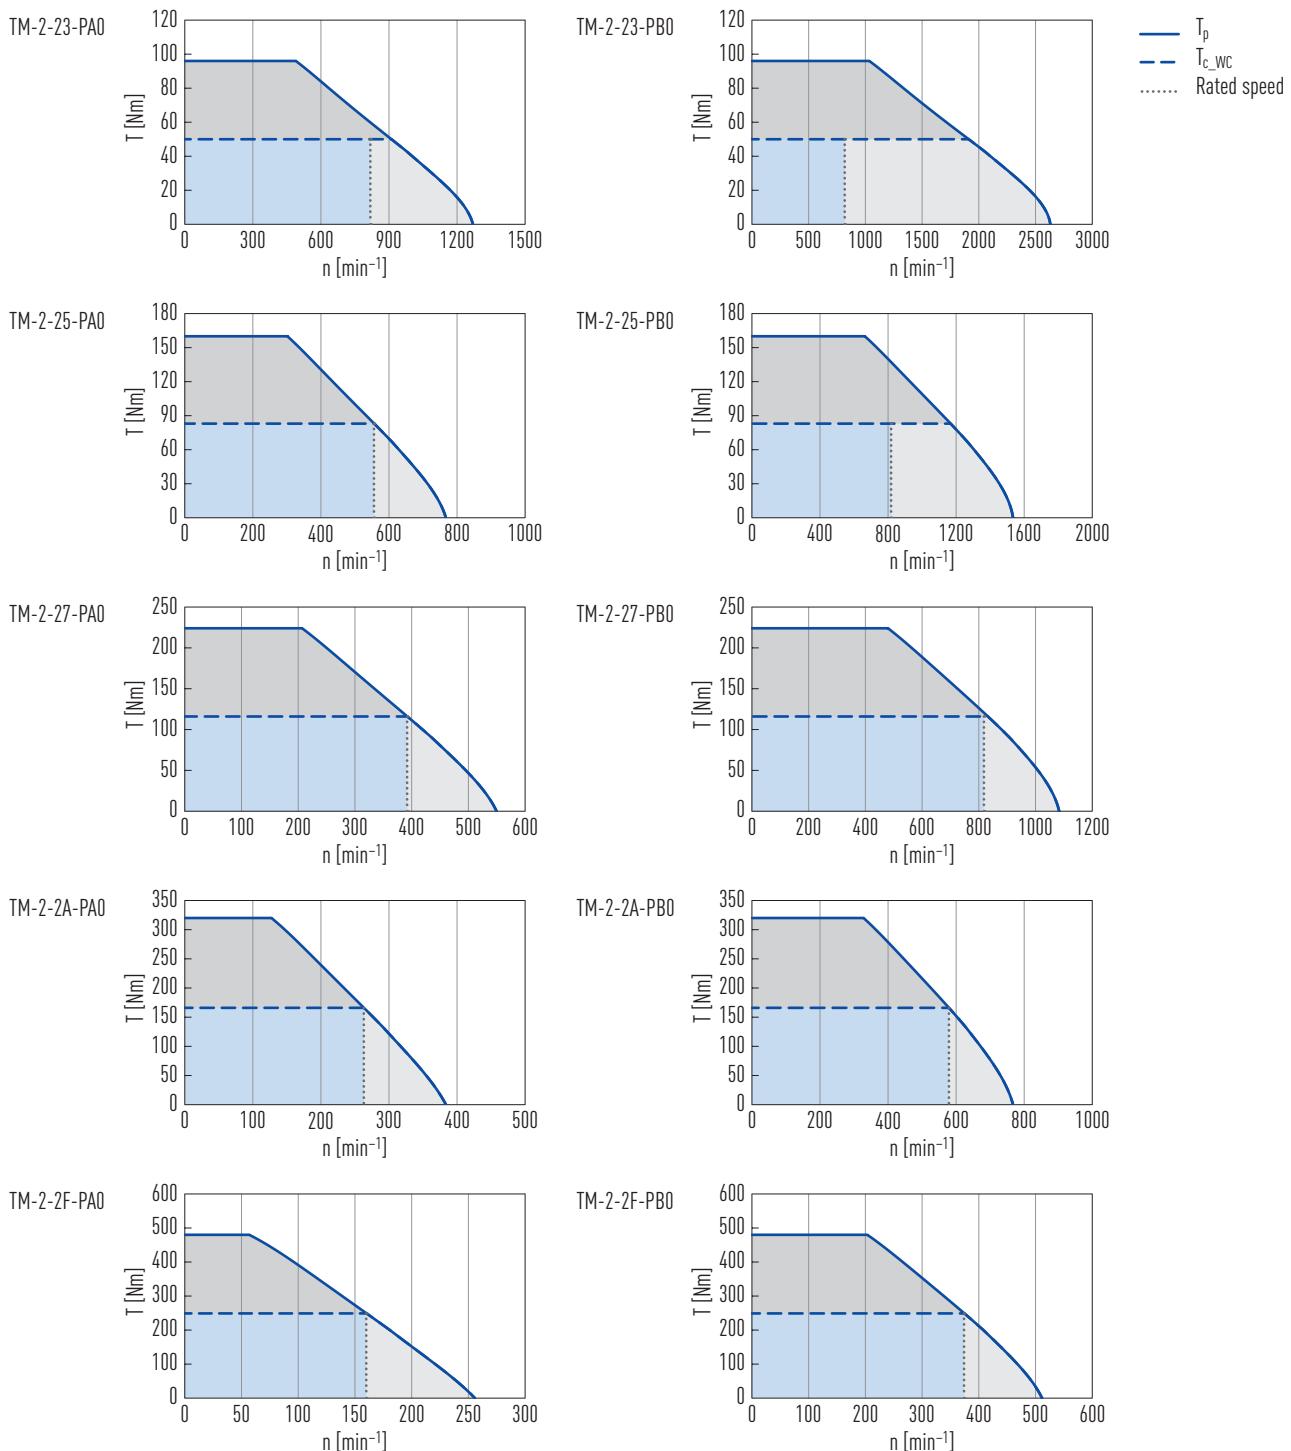

Torque Motors

HIWIN torque motors TM-2


Table 5.2 Technical data for TM-2-2

	Symbol	Unit	TM-2-23-PAO	TM-2-23-PBO	TM-2-25-PAO	TM-2-25-PBO	TM-2-27-PAO	TM-2-27-PBO	TM-2-2A-PAO	TM-2-2A-PBO	TM-2-2F-PAO	TM-2-2F-PBO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	96		160		224		320		480	
Continuous torque (WC)	T _{c_WC}	Nm	50		83		116		166		249	
Stall torque (WC)	T _{s_WC}	Nm	41	41	68	68	95	95	136	135	204	203
Peak current (for 1 sec.)	I _p	A	25.5	51.0	25.5	51.0	25.5	51.0	25.5	51.0	25.5	51.0
Continuous current (WC)	I _{c_WC}	A	10.2	20.4	10.2	20.4	10.2	20.4	10.2	20.4	10.2	20.4
Stall current (WC)	I _{s_WC}	A	8.2	16.3	8.2	16.3	8.2	16.3	8.2	16.3	8.2	16.3
Resistance ¹⁾	R ₂₅	Ω	3.5	0.9	5.2	1.3	6.9	1.7	9.4	2.4	13.6	3.4
Inductance ¹⁾	L ₂₅	mH	25.5	6.4	37.6	9.4	49.7	12.4	68.0	17.0	98.2	24.6
Motor constant	K _m	Nm/√W	2.17	2.14	2.98	2.98	3.62	3.65	4.43	4.38	5.52	5.52
Electrical time constant	K _e	ms	7.3	7.1	7.2	7.2	7.2	7.3	7.2	7.1	7.2	7.2
Torque constant	K _t	Nm/A	5.02	2.42	8.31	4.16	11.60	5.89	16.63	8.31	24.94	12.47
Back emf constant	K _u	V _{eff} /(rad/s)	2.9	1.4	4.8	2.4	6.7	3.4	9.6	4.8	14.4	7.2
Inertia of rotor	J	kgm ²	0.0010		0.0016		0.0023		0.0033		0.0049	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.192	0.187	0.129	0.129	0.098	0.099	0.072	0.070	0.049	0.049
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T _{c_WC}	n	min ⁻¹	911	1,911	556	1,167	392	832	263	579	160	374
Max. speed at T _p	n	min ⁻¹	489	1,034	301	663	206	479	127	328	56	203
Rated speed	n _N	min ⁻¹	818	818	556	818	392	818	263	579	160	374
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	80		100		120		150		200	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	1.0		1.7		2.3		3.3		5.5	
Stator mass	M _s	kg	6.9		10.5		12.0		16.7		23.9	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line

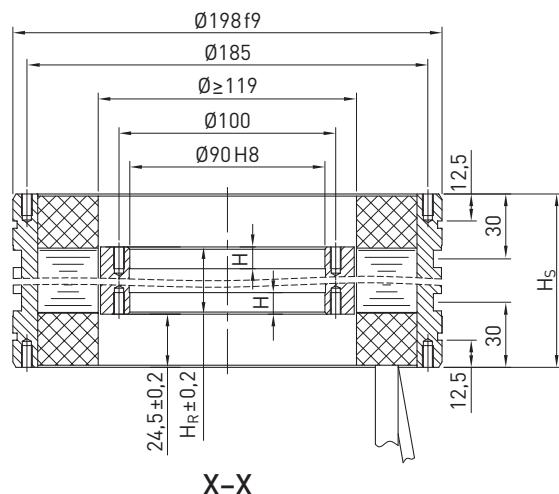
Dimensions TM-2-2


X-X

TM-2-23, TM-2-25, TM-2-27

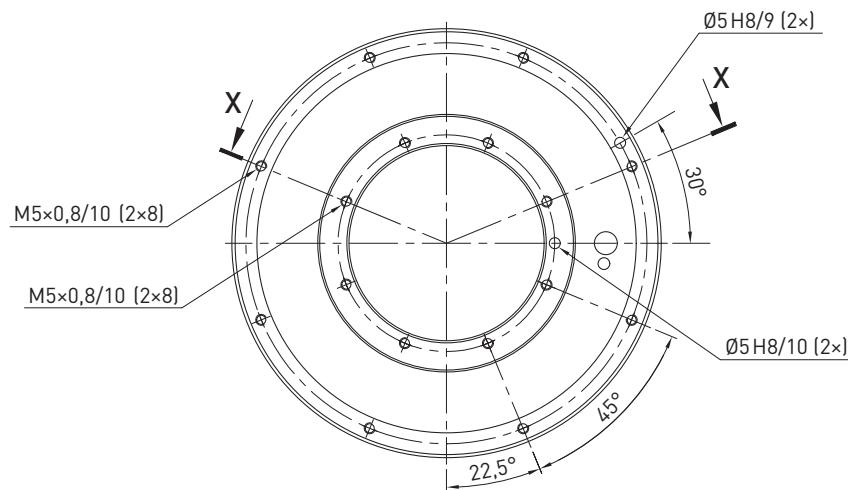

TM-2-2A, TM-2-2F

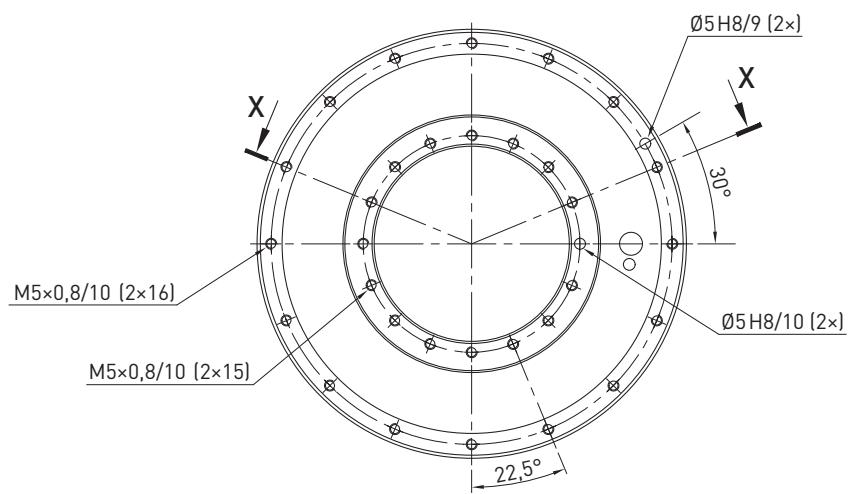

Torque Motors

HIWIN torque motors TM-2

5.4.3 TM-2-4 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

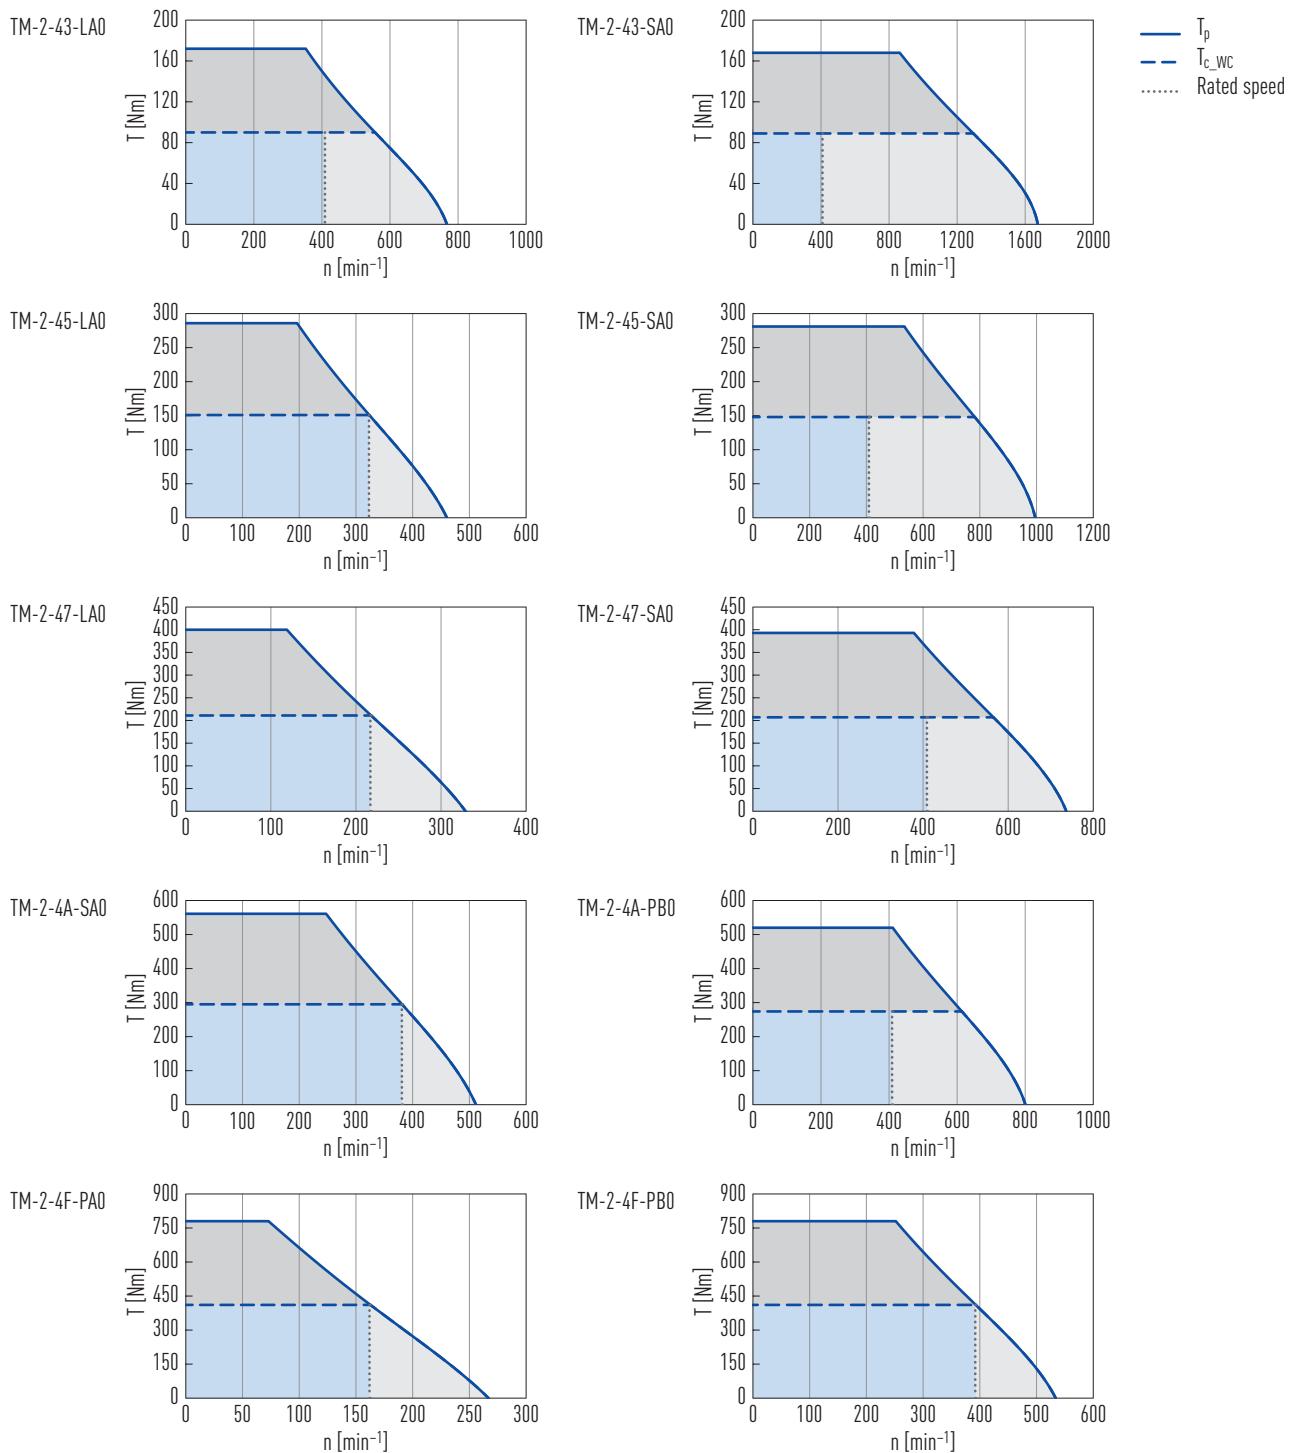


Table 5.3 Technical data for TM-2-4

	Symbol	Unit	TM-2-43-LAO	TM-2-43-SAO	TM-2-45-LAO	TM-2-45-SAO	TM-2-47-LAO	TM-2-47-SAO	TM-2-4A-SAO	TM-2-4A-PBO	TM-2-4F-PAO	TM-2-4F-PBO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	172	168	286	281	400	393	561	520	780	780
Continuous torque (WC)	T _{c_WC}	Nm	90	89	151	148	211	207	295	274	411	411
Stall torque (WC)	T _{s_WC}	Nm	73	72	122	120	171	168	239	222	334	334
Peak current (for 1 sec.)	I _p	A	23.7	52.0	23.7	52.0	23.7	52.0	52.0	75.0	37.5	75.0
Continuous current (WC)	I _{c_WC}	A	11.4	24.9	11.4	24.9	11.4	24.9	24.9	36.0	18.0	36.0
Stall current (WC)	I _{s_WC}	A	9.1	19.9	9.1	19.9	9.1	19.9	19.9	28.8	14.4	28.8
Resistance¹⁾	R ₂₅	Ω	5.60	1.20	8.30	1.72	11.00	2.30	3.10	1.50	8.70	2.17
Inductance¹⁾	L ₂₅	mH	15.80	3.30	23.30	4.84	30.80	6.41	8.75	4.20	24.30	6.08
Motor constant	K _m	Nm/√W	2.86	2.84	3.89	3.93	4.71	4.60	5.74	5.27	6.59	6.60
Electrical time constant	K _e	ms	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
Torque constant	K _t	Nm/A	8.31	3.81	13.86	6.41	19.40	8.66	12.47	7.97	23.90	11.95
Back emf constant	K _u	V _{eff} /(rad/s)	4.8	2.2	8.0	3.7	11.2	5.0	7.2	4.6	13.8	6.9
Inertia of rotor	J	kgm ²	0.0085		0.0140		0.0220		0.0290		0.0450	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.096	0.094	0.065	0.066	0.049	0.049	0.036	0.036	0.025	0.025
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	556	1,295	323	782	217	565	381	614	162	392
Max. speed at T_p	n	min ⁻¹	352	862	196	533	118	378	247	410	72	251
Rated speed	n _N	min ⁻¹	409	409	323	409	217	409	381	409	162	392
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	70		90		110		140		190	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	1.5		2.6		3.5		5.0		7.6	
Stator mass	M _s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-4

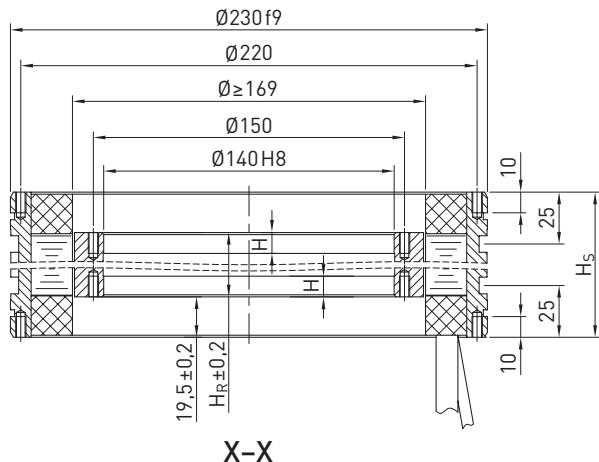

TM-2-43, TM-2-45, TM-2-47

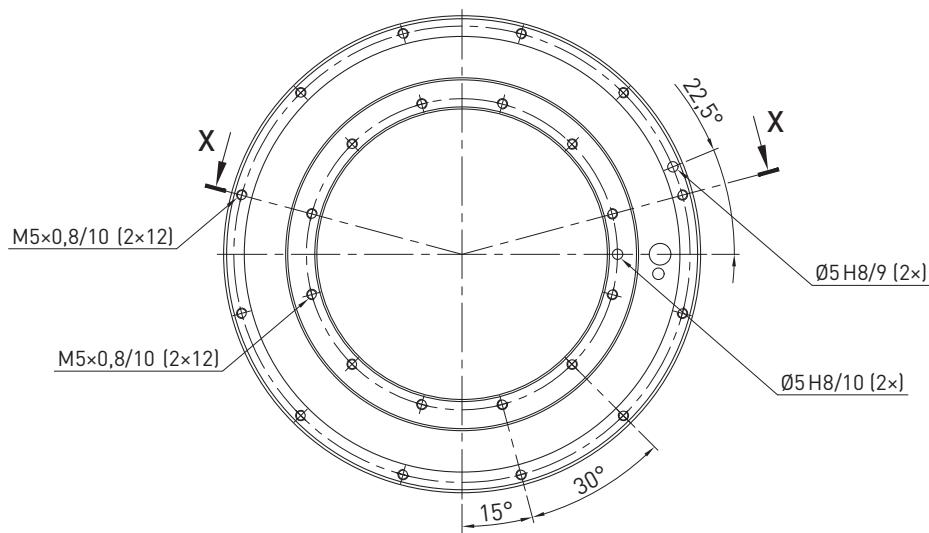


TM-2-4A, TM-2-4F

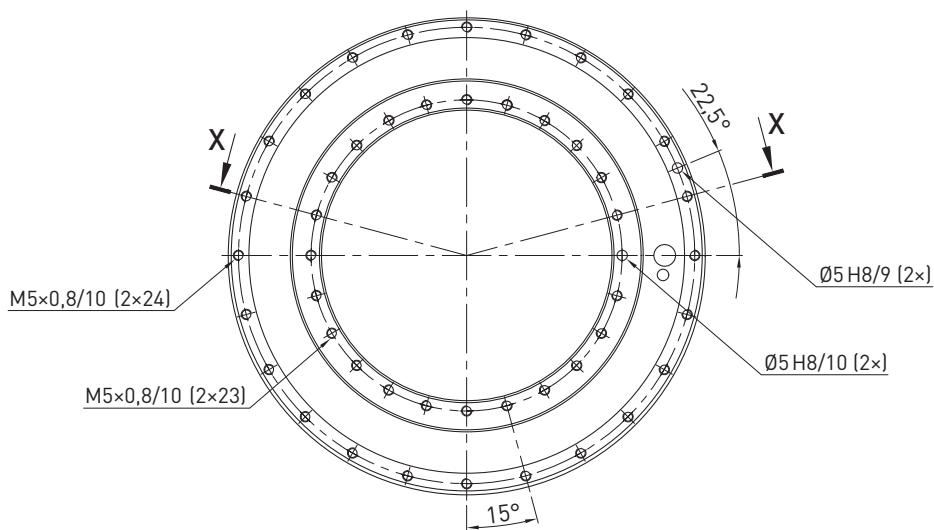

5.4.4 TM-2-7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

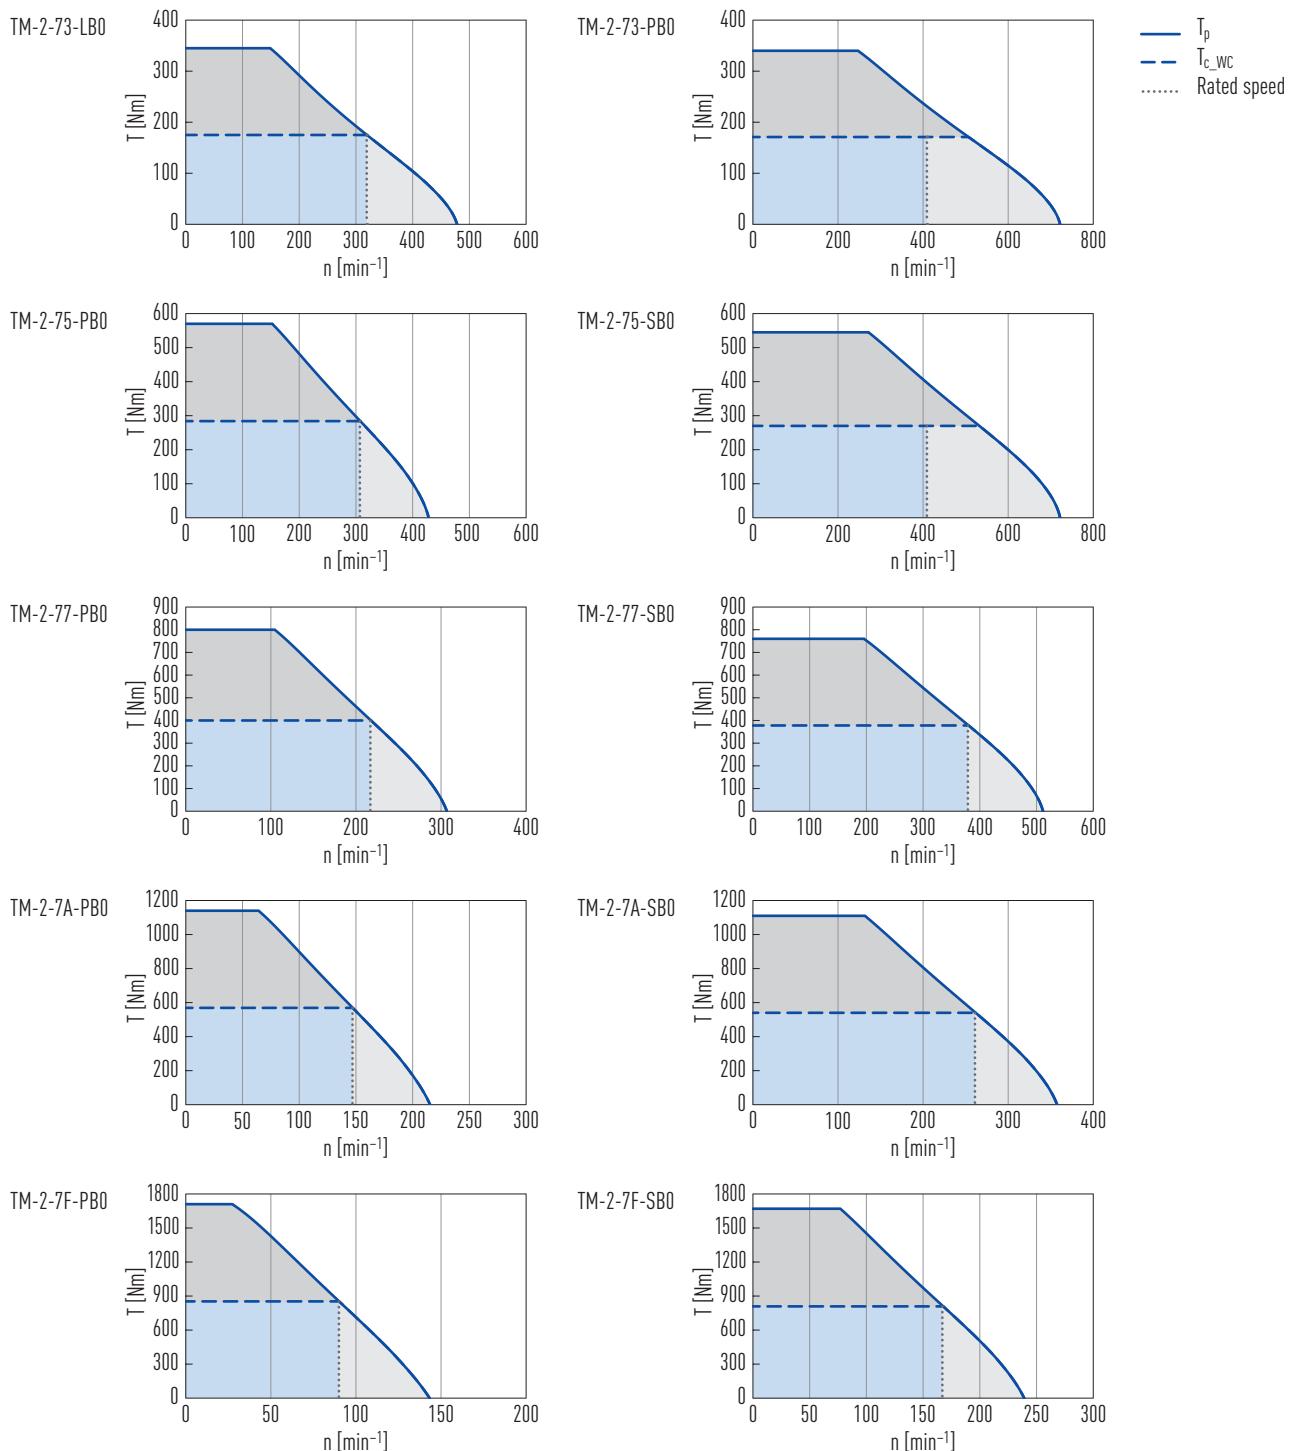

Torque Motors

HIWIN torque motors TM-2-

Table 5.4 Technical data for TM-2-7


	Symbol	Unit	TM-2-73-LAO	TM-2-73-PBO	TM-2-75-PBO	TM-2-75-SBO	TM-2-77-PBO	TM-2-77-SBO	TM-2-7A-PBO	TM-2-7A-SBO	TM-2-7F-PBO	TM-2-7F-SBO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	345	340	570	545	800	760	1,140	1,110	1,710	1,670
Continuous torque (WC)	T _{c_WC}	Nm	175	171	284	270	400	378	569	540	853	809
Stall torque (WC)	T _{s_WC}	Nm	144	141	233	222	329	310	468	442	701	663
Peak current (for 1 sec.)	I _p	A	38.1	56.0	56.0	88.3	56.0	88.3	56.0	88.3	56.0	88.3
Continuous current (WC)	I _{c_WC}	A	14.0	20.5	20.5	32.3	20.5	32.3	20.5	32.3	20.5	32.3
Stall current (WC)	I _{s_WC}	A	11.2	16.4	16.4	25.8	16.4	25.8	16.4	25.8	16.4	25.8
Resistance¹⁾	R ₂₅	Ω	3.5	1.7	2.5	1.0	3.3	1.3	4.5	1.8	6.5	2.6
Inductance¹⁾	L ₂₅	mH	27.7	11.8	17.4	6.7	23.0	8.8	31.4	12.0	45.4	17.4
Motor constant	K _m	Nm/√W	5.82	5.58	7.63	7.26	9.33	8.89	11.42	10.79	14.24	13.48
Electrical time constant	K _e	ms	7.9	6.9	7.0	6.7	7.0	6.8	7.0	6.7	7.0	6.7
Torque constant	K _t	Nm/A	13.34	8.83	14.90	8.83	20.78	12.47	29.62	17.84	44.51	26.67
Back emf constant	K _u	V _{eff} /rad/s	7.7	5.1	8.6	5.1	12.0	7.2	17.1	10.3	25.7	15.4
Inertia of rotor	J	kgm ²	0.025		0.041		0.057		0.081		0.121	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.092	0.089	0.060	0.061	0.046	0.047	0.033	0.034	0.023	0.023
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	319	506	307	532	217	379	147	261	90	167
Max. speed at T_p	n	min ⁻¹	148	246	152	271	104	195	64	131	27	77
Rated speed	n _N	min ⁻¹	319	409	307	409	217	379	147	261	90	167
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	80		100		120		150		200	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	2.2		3.6		5.0		7.1		11.6	
Stator mass	M _s	kg	13.6		17.9		22.3		28.9		40.6	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions TM-2-7

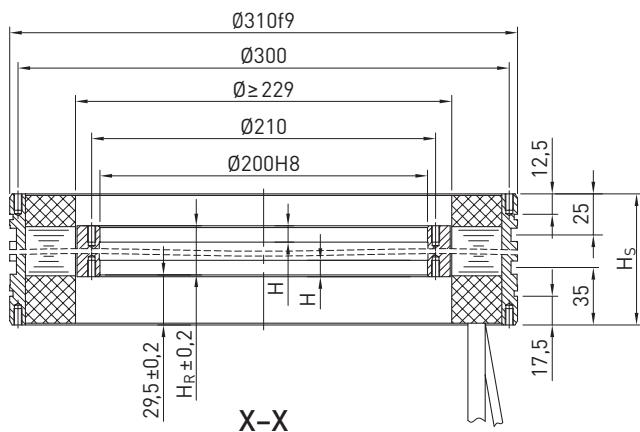

TM-2-73, TM-2-75, TM-2-77

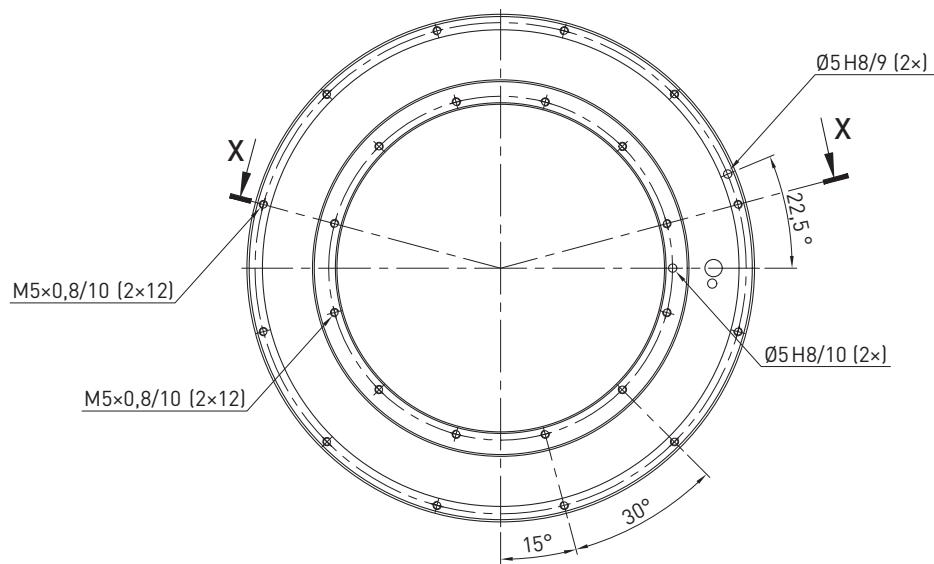

TM-2-7A, TM-2-7F

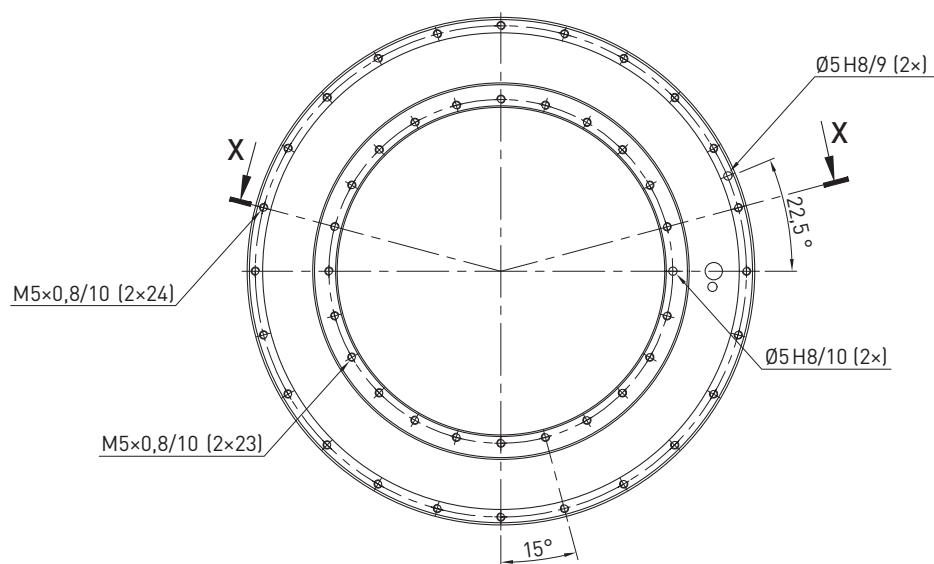

Torque Motors

HIWIN torque motors TM-2

5.4.5 TM-2-A specifications

Torque-speed curves (DC bus voltage: 600 VDC)

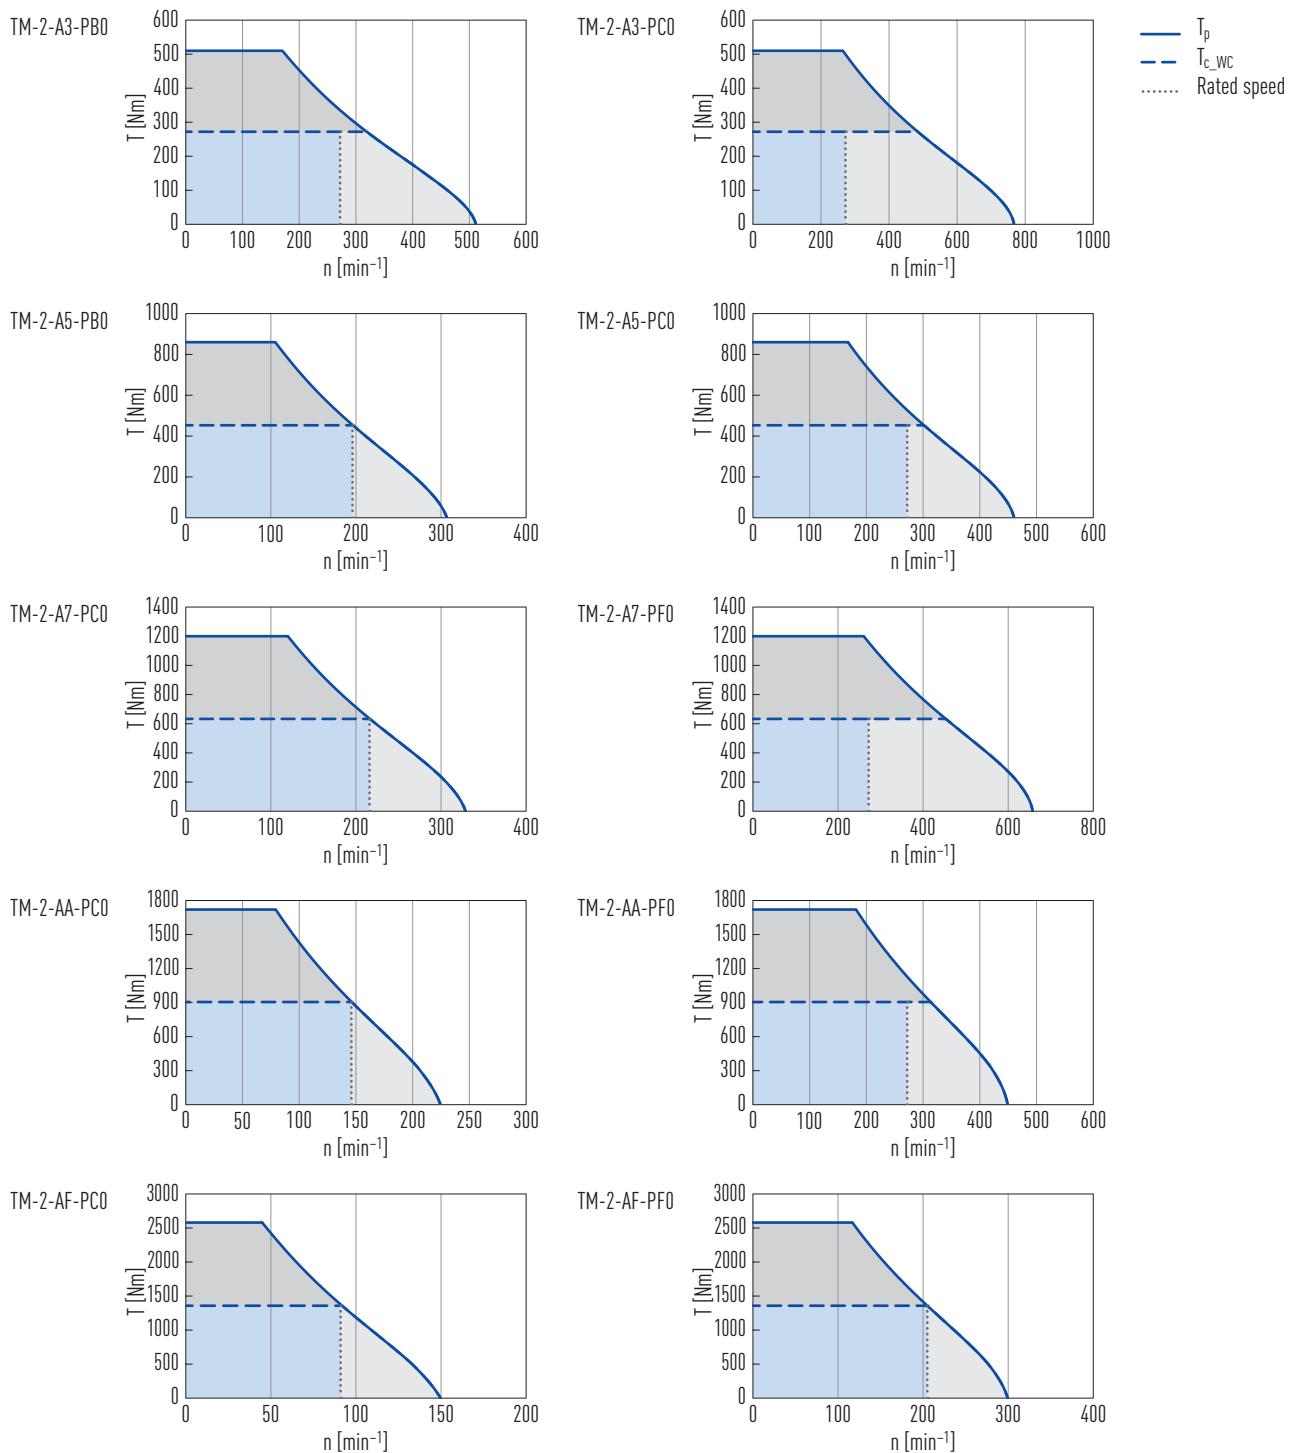


Table 5.5 Technical data for TM-2-A

	Symbol	Unit	TM-2-A3-PBO	TM-2-A3-PCO	TM-2-A5-PBO	TM-2-A5-PCO	TM-2-A7-PCO	TM-2-A7-PFO	TM-2-AA-PCO	TM-2-AA-PFO	TM-2-AF-PCO	TM-2-AF-PFO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	510		860		1,200		1,720		2,580	
Continuous torque (WC)	T _{c_WC}	Nm	272		453		633		905		1,358	
Stall torque (WC)	T _{s_WC}	Nm	222		371		518		743		1,114	
Peak current (for 1 sec.)	I _p	A	52	78	52	78	78	156	78	156	78	156
Continuous current (WC)	I _{c_WC}	A	23	35	23	35	35	70	35	70	35	70
Stall current (WC)	I _{s_WC}	A	18.4	28.0	18.4	28.0	28.0	56.0	28.0	56.0	28.0	56.0
Resistance¹⁾	R ₂₅	Ω	1.80	0.82	2.70	1.20	1.60	0.40	2.20	0.55	3.20	0.80
Inductance¹⁾	L ₂₅	mH	12.4	5.5	18.3	8.2	10.8	2.7	14.8	3.7	21.6	5.4
Motor constant	K _m	Nm/√W	7.46	7.36	10.31	10.31	12.53	12.53	15.60	15.60	19.44	19.44
Electrical time constant	K _e	ms	6.9	6.7	6.8	6.8	6.8	6.8	6.7	6.7	6.8	6.8
Torque constant	K _t	Nm/A	12.47	8.31	20.78	13.86	19.40	9.70	28.41	14.20	42.61	21.30
Back emf constant	K _u	V _{eff} /(rad/s)	7.2	4.8	12.0	8.0	11.2	5.6	16.4	8.2	24.6	12.3
Inertia of rotor	J	kgm ²	0.065		0.108		0.151		0.214		0.320	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.074	0.070	0.049	0.048	0.036	0.036	0.026	0.026	0.018	0.018
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	319	484	196	301	216	453	146	313	91	205
Max. speed at T_p	n	min ⁻¹	170	264	105	167	120	260	79	181	44	116
Rated speed	n _N	min ⁻¹	272	272	196	272	216	272	146	272	91	205
Mechanical parameters												
Number of poles	2p		66									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	90		110		130		160		210	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	3.3		5.5		7.6		10.8		16.2	
Stator mass	M _s	kg	20.1	20.1	26.8	26.8	34.5	34.5	44.9	44.9	63.1	63.1

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-A

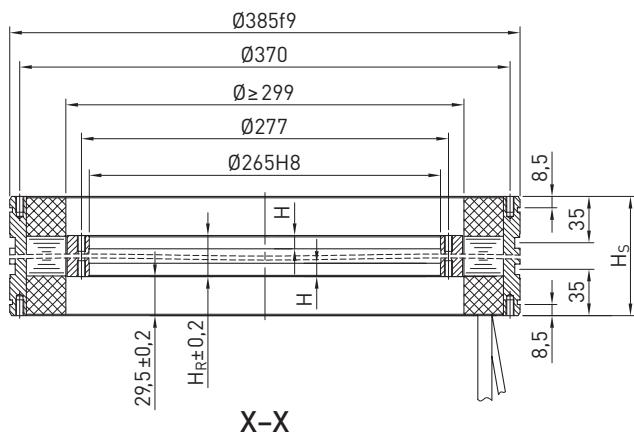

TM-2-A3, TM-2-A5, TM-2-A7

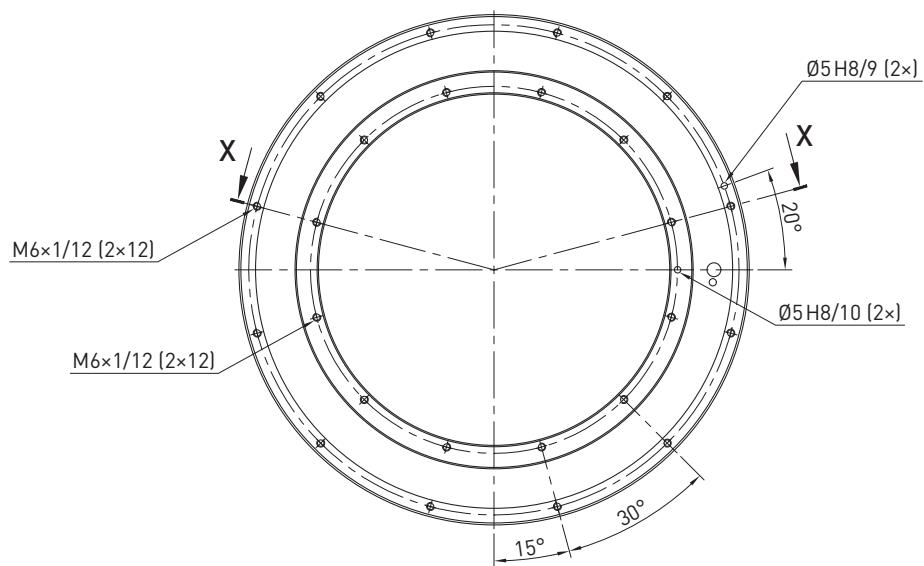


TM-2-AA, TM-2-AF

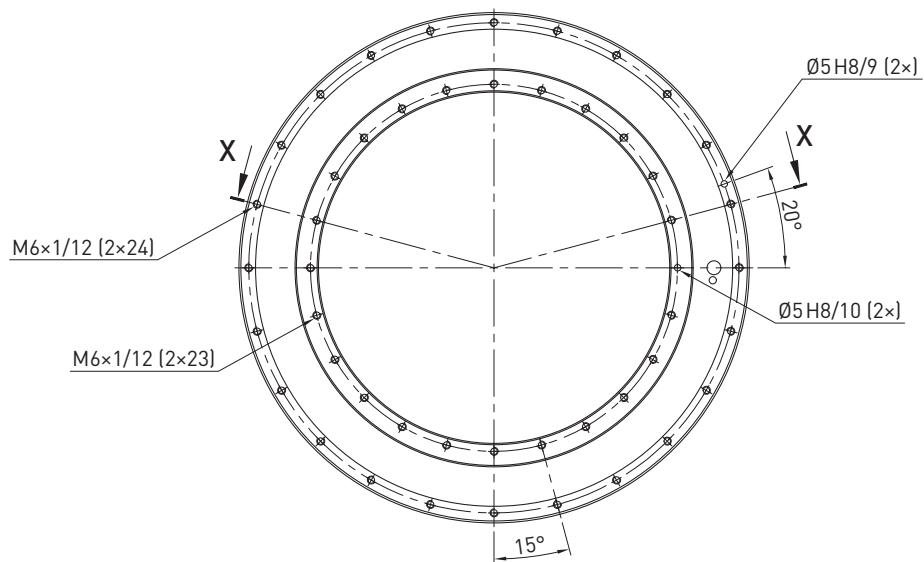

5.4.6 TM-2-D specifications

Torque-speed curves (DC bus voltage: 600 VDC)

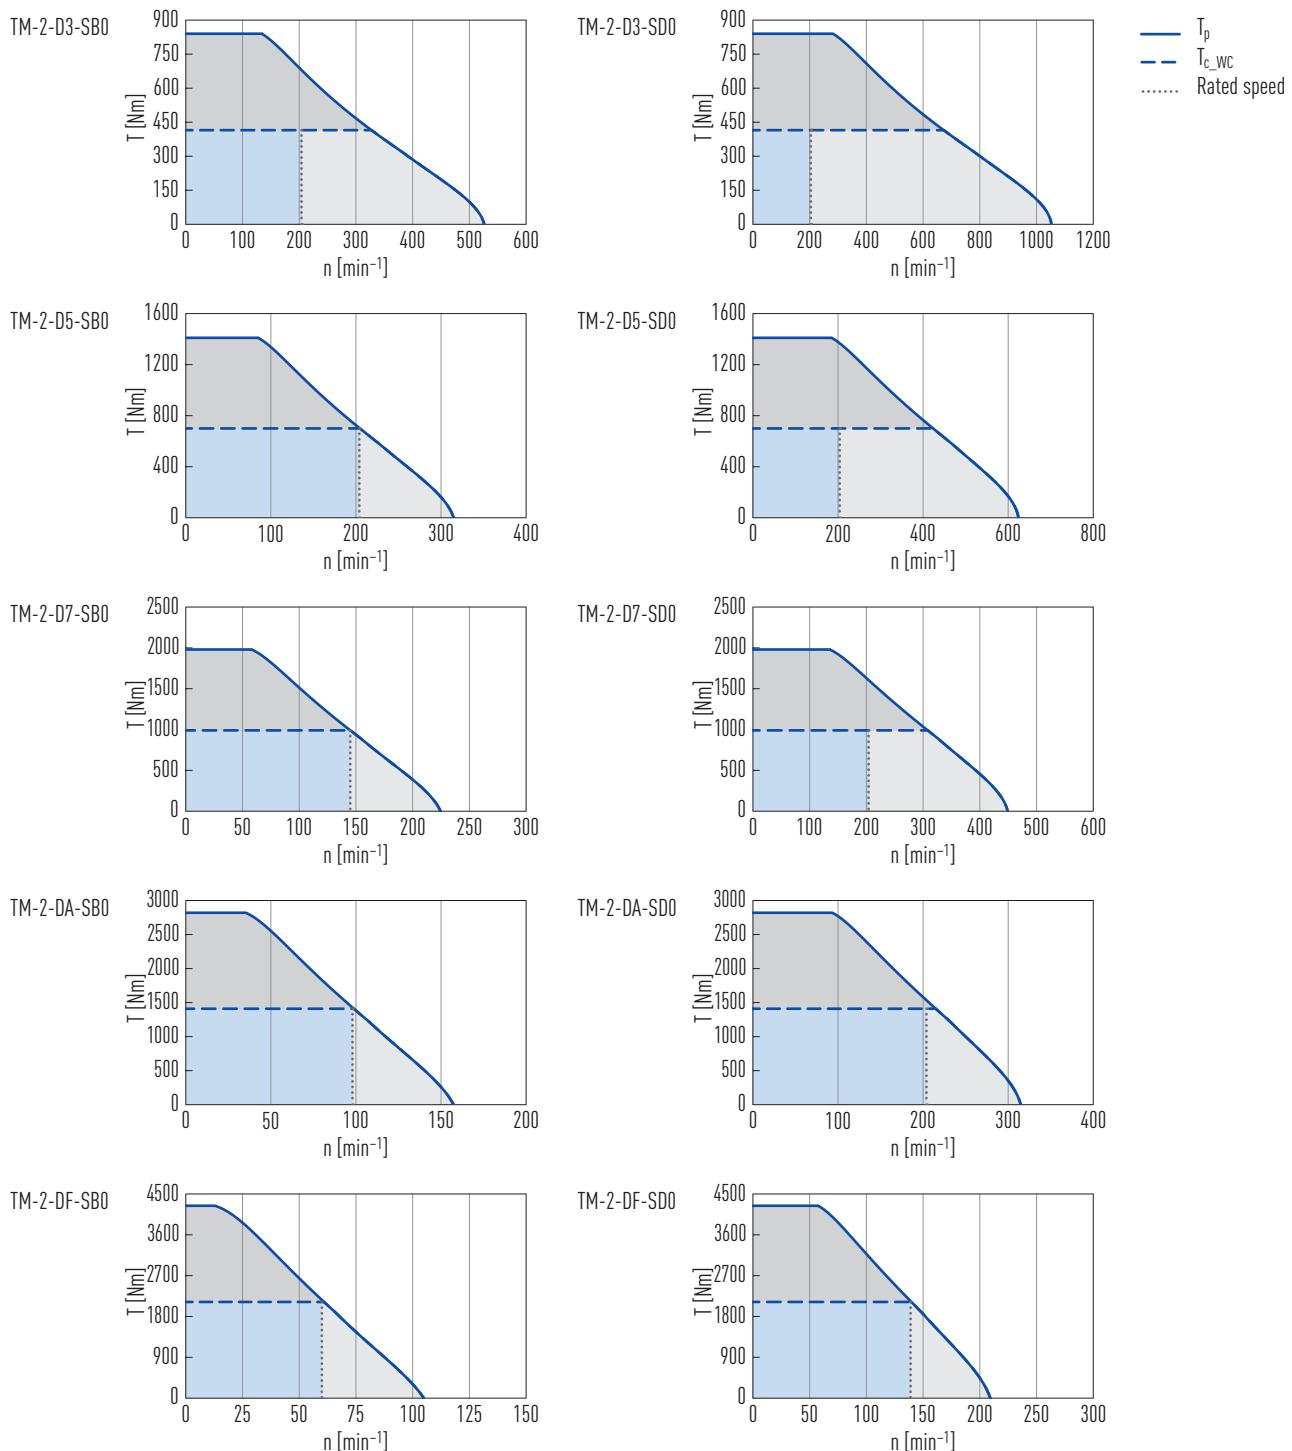

Torque Motors

HIWIN torque motors TM-2

Table 5.6 Technical data for TM-2-D


	Symbol	Unit	TM-2-D3-SBO	TM-2-D3-SDO	TM-2-D5-SBO	TM-2-D5-SDO	TM-2-D7-SBO	TM-2-D7-SDO	TM-2-DA-SBO	TM-2-DA-SDO	TM-2-DF-SBO	TM-2-DF-SDO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	840		1,410		1,980		2,820		4,240	
Continuous torque (WC)	T _{c_WC}	Nm	415		700		990		1,410		2,120	
Stall torque (WC)	T _{s_WC}	Nm	339		572		801		1,146		1,719	
Peak current (for 1 sec.)	I _p	A	106	212	106	212	106	212	106	212	106	212
Continuous current (WC)	I _{c_WC}	A	35.4	70.8	35.4	70.8	35.4	70.8	35.4	70.8	35.4	70.8
Stall current (WC)	I _{s_WC}	A	28.3	56.6	28.3	56.6	28.3	56.6	28.3	56.6	28.3	56.6
Resistance¹⁾	R ₂₅	Ω	1.00	0.24	1.40	0.36	1.90	0.48	2.60	0.65	3.80	0.95
Inductance¹⁾	L ₂₅	mH	6.0	1.5	8.8	2.2	11.7	2.9	16.0	4.0	23.2	5.8
Motor constant	K _m	Nm/√W	9.83	10.04	13.95	13.76	16.78	16.69	20.51	20.51	25.44	25.44
Electrical time constant	K _e	ms	6.0	6.3	6.3	6.1	6.2	6.0	6.2	6.2	6.1	6.1
Torque constant	K _t	Nm/A	12.12	6.06	20.26	10.22	28.41	14.20	40.53	20.26	60.79	30.48
Back emf constant	K _u	V _{eff} /rad/s	7.0	3.5	11.7	5.9	16.4	8.2	23.4	11.7	35.1	17.6
Inertia of rotor	J	kgm ²	0.16		0.26		0.37		0.53		0.79	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.056	0.058	0.040	0.039	0.029	0.029	0.021	0.021	0.015	0.015
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	327	672	204	423	145	308	98	214	60	139
Max. speed at T_p	n	min ⁻¹	134	282	84	184	57	135	35	93	12	57
Rated speed	n _R	min ⁻¹	204	204	204	204	145	204	98	204	60	139
Mechanical parameters												
Number of poles	2p		88									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	90		110		130		160		210	
Rotor height	H _R	mm	31		51		71		101		151	
Length of rotor centring fit	H	mm	10		15		15		15		15	
Rotor mass	M _r	kg	4.8		7.9		11.0		15.8		23.6	
Stator mass	M _s	kg	20		35		50		73		87	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Dimensions TM-2-D

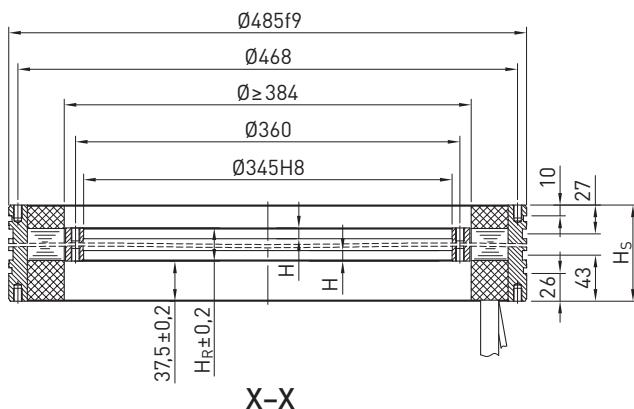

TM-2-D3, TM-2-D5, TM-2-D7

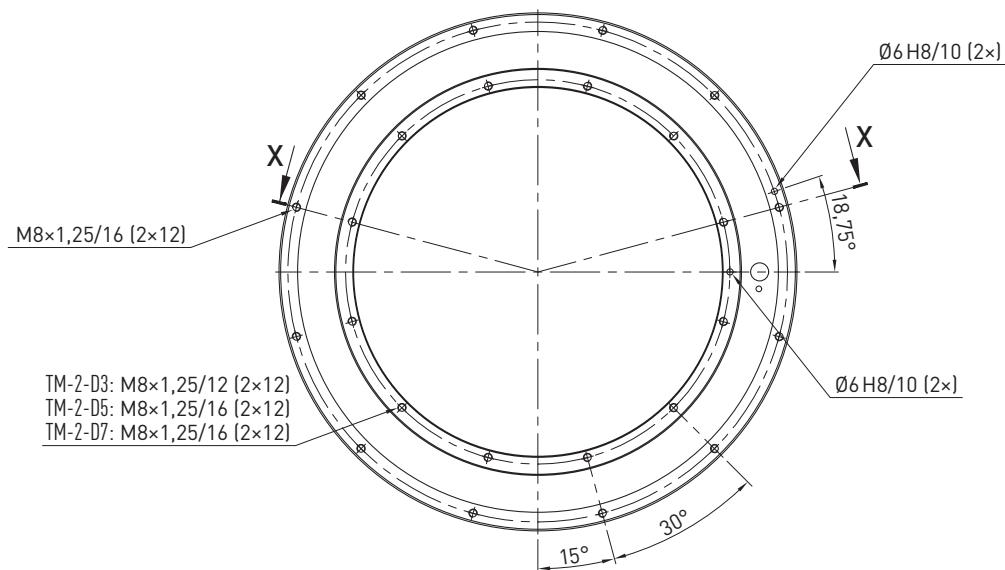

TM-2-DA, TM-2-DF

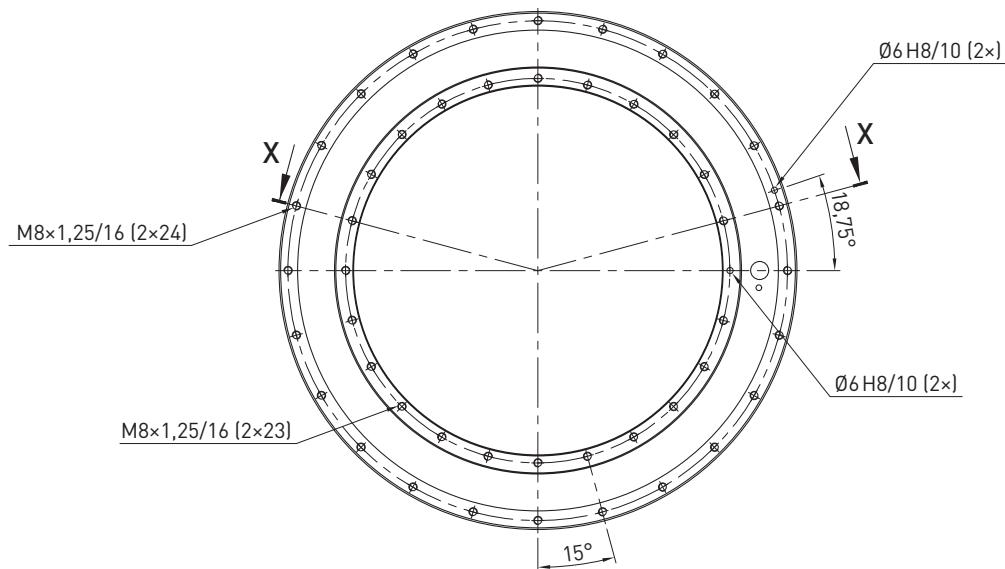

Torque Motors

HIWIN torque motors TM-2

5.4.7 TM-2-G specifications

Torque-speed curves (DC bus voltage: 600 VDC)

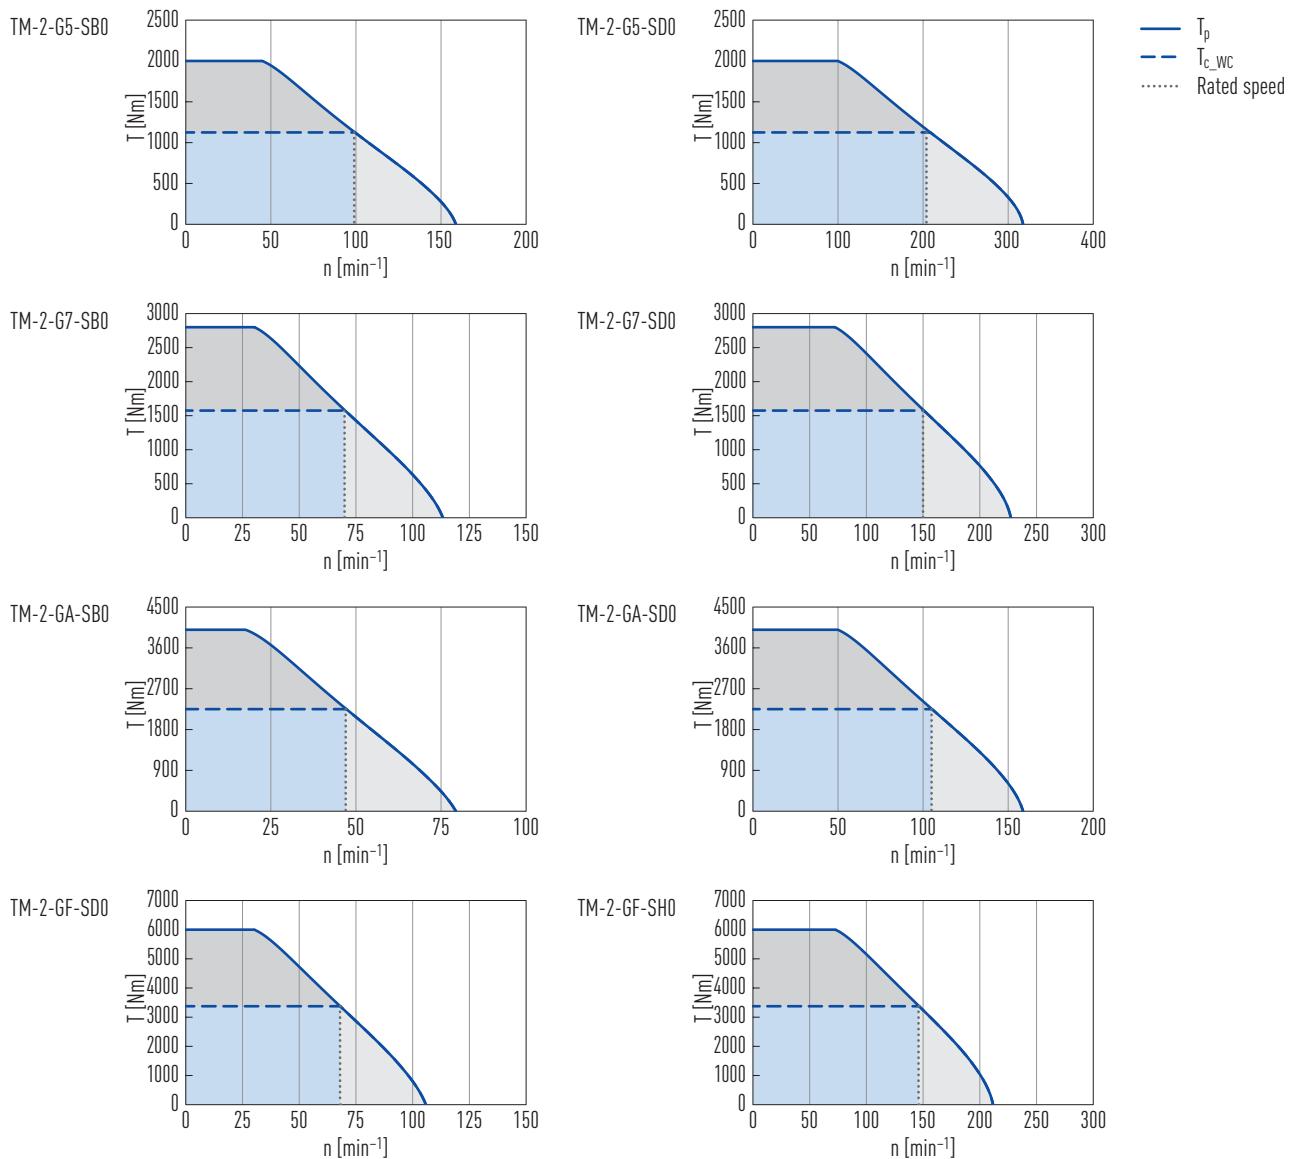



Table 5.7 Technical data for TM-2-G

	Symbol	Unit	TM-2-G5-SBO	TM-2-G5-SDO	TM-2-G7-SBO	TM-2-G7-SDO	TM-2-GA-SBO	TM-2-GA-SDO	TM-2-GF-SBO	TM-2-GF-SDO								
Torques and electrical parameters																		
Peak torque (for 1 sec.)	T _p	Nm	2,000			2,800			4,000									
Continuous torque (WC)	T _{c_WC}	Nm	1,125			1,575			2,250									
Stall torque (WC)	T _{s_WC}	Nm	930	931	1,302	1,304	1,860	1,863	2,794	2,794								
Peak current (for 1 sec.)	I _p	A	80	160	80	160	80	160	160	320								
Continuous current (WC)	I _{c_WC}	A	30.3	60.6	30.3	60.6	30.3	60.6	60.6	121.2								
Stall current (WC)	I _{s_WC}	A	24.2	48.5	24.2	48.5	24.2	48.5	48.5	97.0								
Resistance¹⁾	R ₂₅	Ω	2.10	0.52	2.76	0.70	3.76	0.94	1.36	0.34								
Inductance¹⁾	L ₂₅	mH	21.00	5.30	27.80	7.00	38.00	9.50	13.70	3.43								
Motor constant	K _m	Nm/√W	22.59	22.70	27.65	27.45	33.81	33.81	42.08	42.08								
Electrical time constant	K _e	ms	10.0	10.2	10.1	10.0	10.1	10.1	10.1	10.1								
Torque constant	K _t	Nm/A	40.18	20.09	56.29	28.06	80.37	40.18	60.28	30.14								
Back emf constant	K _u	V _{eff} /rad/s	23.2	11.6	32.5	16.2	46.4	23.2	34.8	17.4								
Inertia of rotor	J	kgm ²	0.452			0.619			0.904									
Thermal resistance (WC)	R _{th_WC}	°C/W	0.036	0.037	0.028	0.027	0.020	0.020	0.014	0.014								
Max. DC bus voltage	U _{max}	VDC	750															
Max. speed at T_{c_WC}	n	min ⁻¹	99	208	70	150	47	105	68	146								
Max. speed at T_p	n	min ⁻¹	44	99	30	72	17	49	30	72								
Rated speed	n _N	min ⁻¹	99	204	70	150	47	105	68	146								
Mechanical parameters																		
Number of poles	2p		88															
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000															
Stator height	H _S	mm	110			130			160									
Rotor height	H _R	mm	51			71			101									
Length of rotor centring fit	H	mm	15			15			15									
Rotor mass	M _r	kg	9.7			13.5			19.3									
Stator mass	M _s	kg	50.0			63.5			78.0									
All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature																		
WC: with water cooling																		
¹⁾ Line to line																		


Torque Motors

HIWIN torque motors TM-2


Dimensions TM-2-G

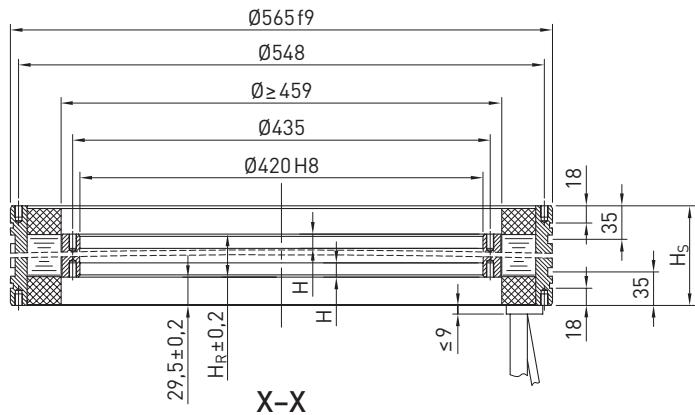

TM-2-G5, TM-2-G7

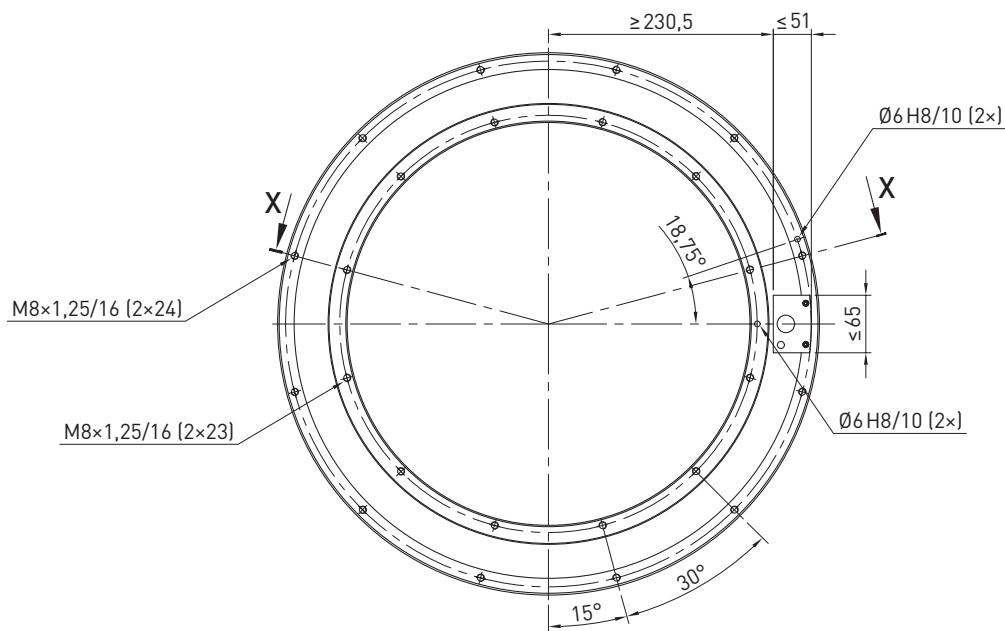

TM-2-GA, TM-2-GF

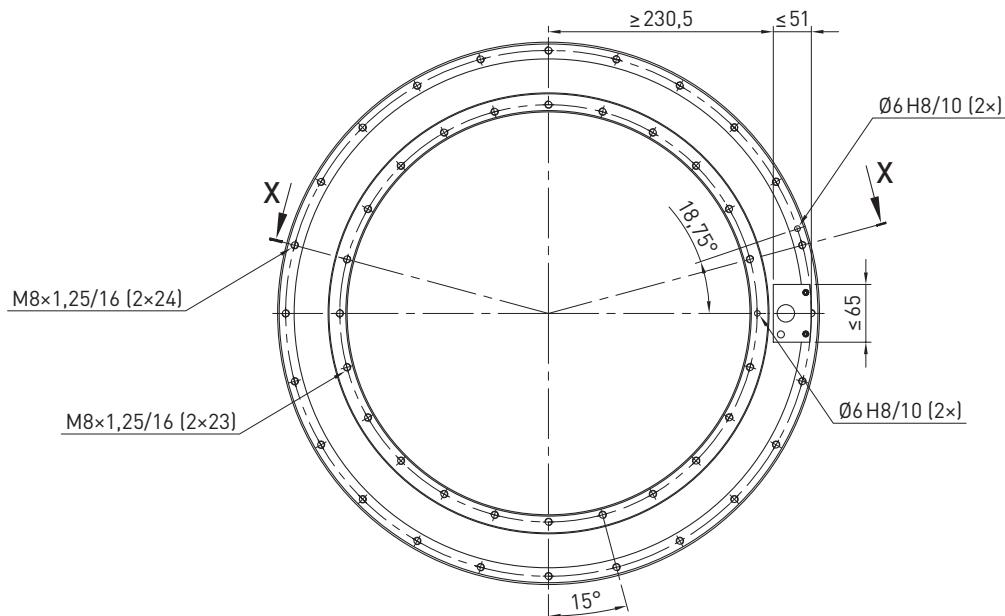

6. HIWIN torque motors IM-2

6.1 Special characteristics of the torque motors IM-2

IM-2 series torque motors are ready-to-install motor elements consisting of a stator and rotor, especially suitable for applications in machine tools.

Due to the integrated cooling channels, the torque motor can be operated with liquid cooling. No additional process heat is then introduced into the machine and higher continuous torques can be achieved.

The torque motors of the IM-2 series are constructed for field-weakening operation. They thus achieve a significantly broader speed spectrum and are therefore predestined for combined axes for turning and milling operations.




Key features of the torque motors IM-2:

- Optimised for a broad speed spectrum (field weakening operation)
- Wear- and maintenance-free direct drive
- Play-free and highly precise
- Prepared for liquid cooling
- UL-certified

Typical fields of application for the torque motors TMRI:

- Machine tools, especially combined turning and milling axes


6.2 Order code for torque motors IM-2

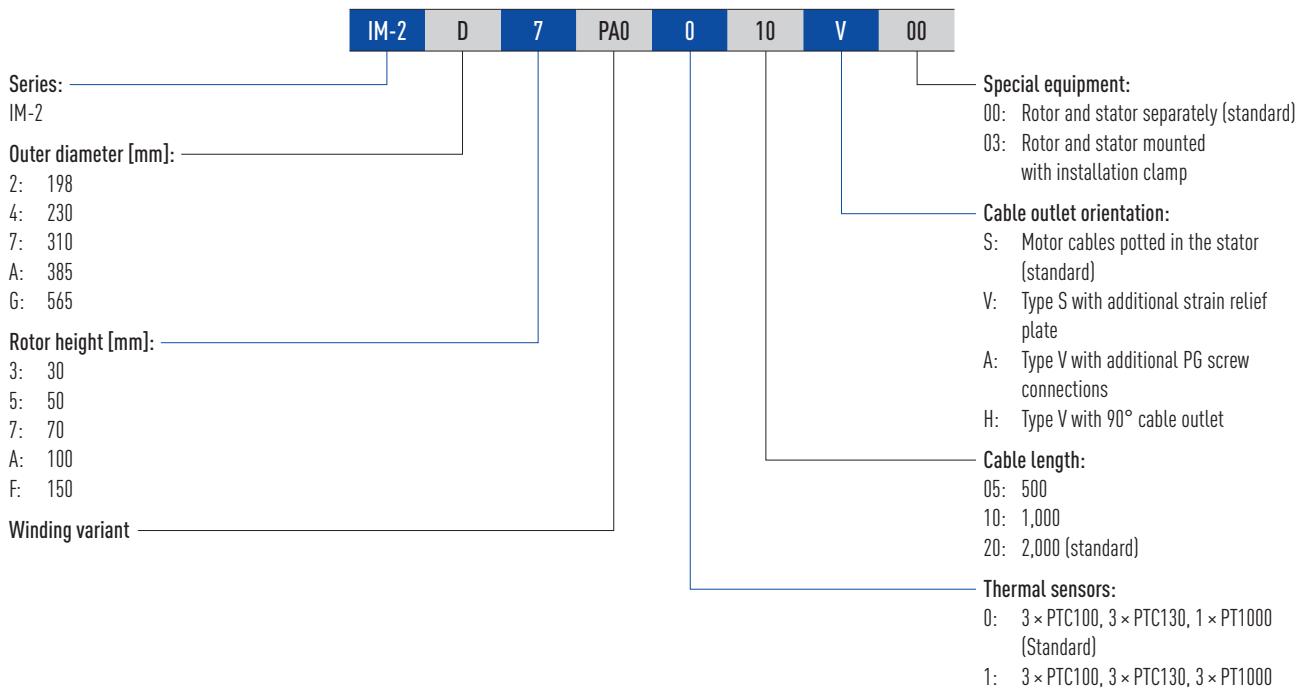

Torque Motors

HIWIN torque motors IM-2


6.3 IM-2 torques

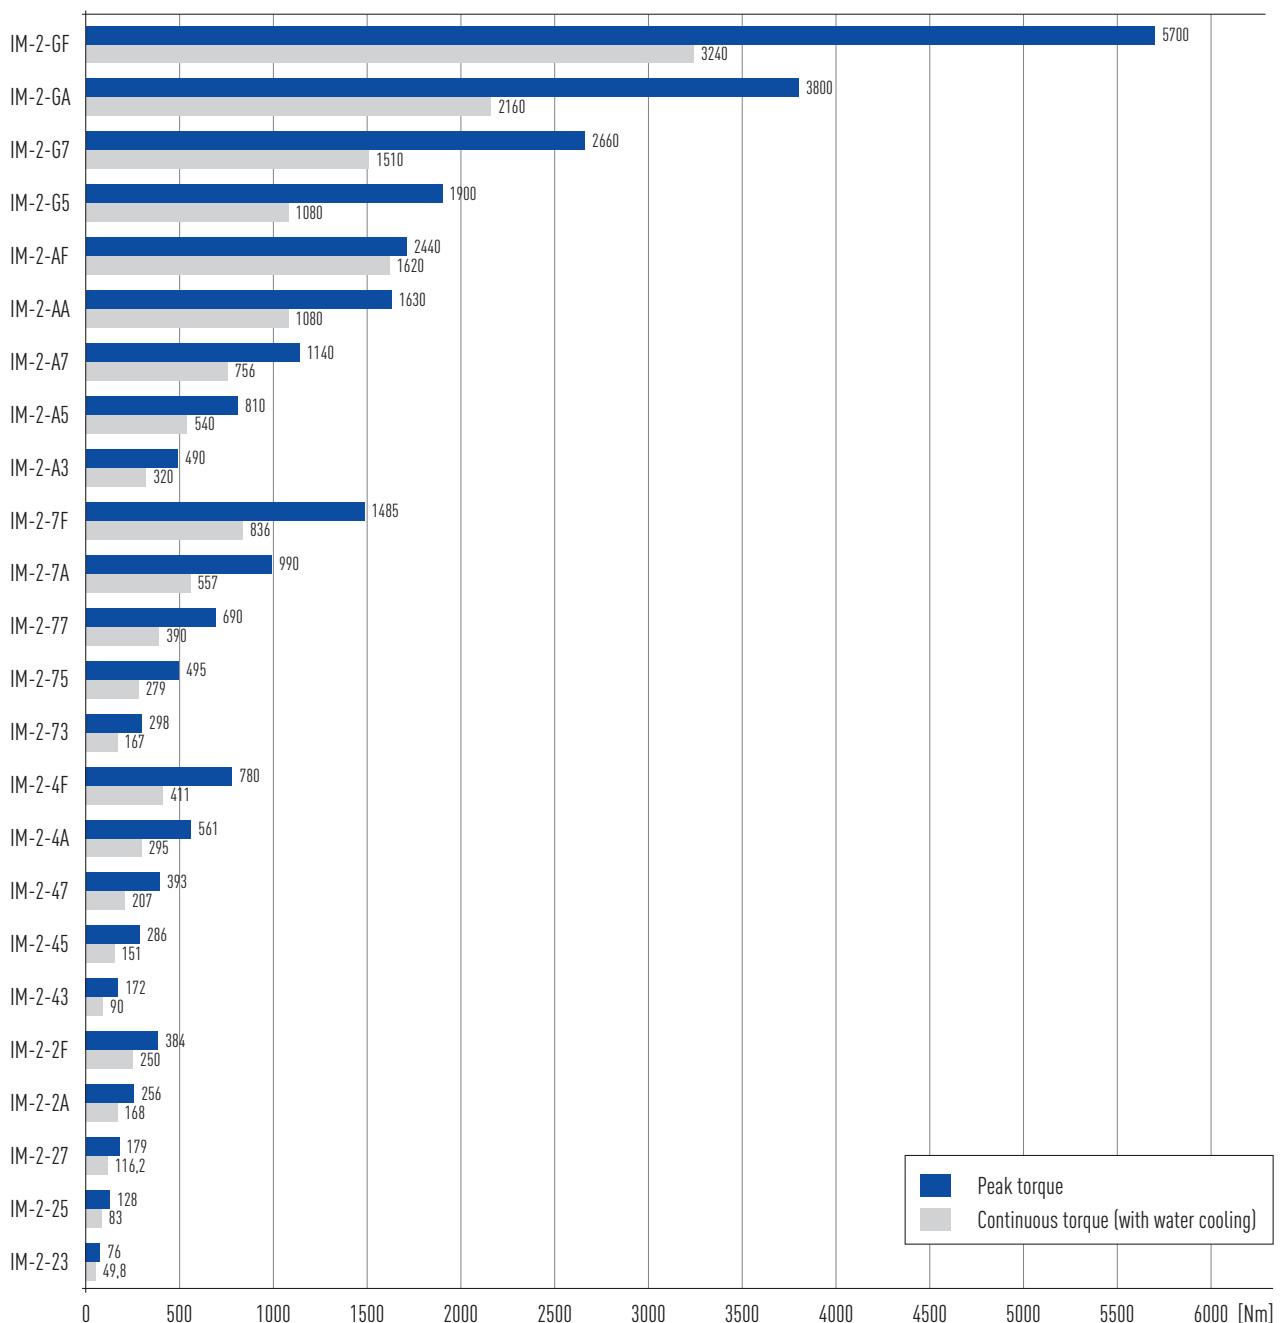

6.4 Torque motor IM-2 specifications

6.4.1 IM-2-2 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

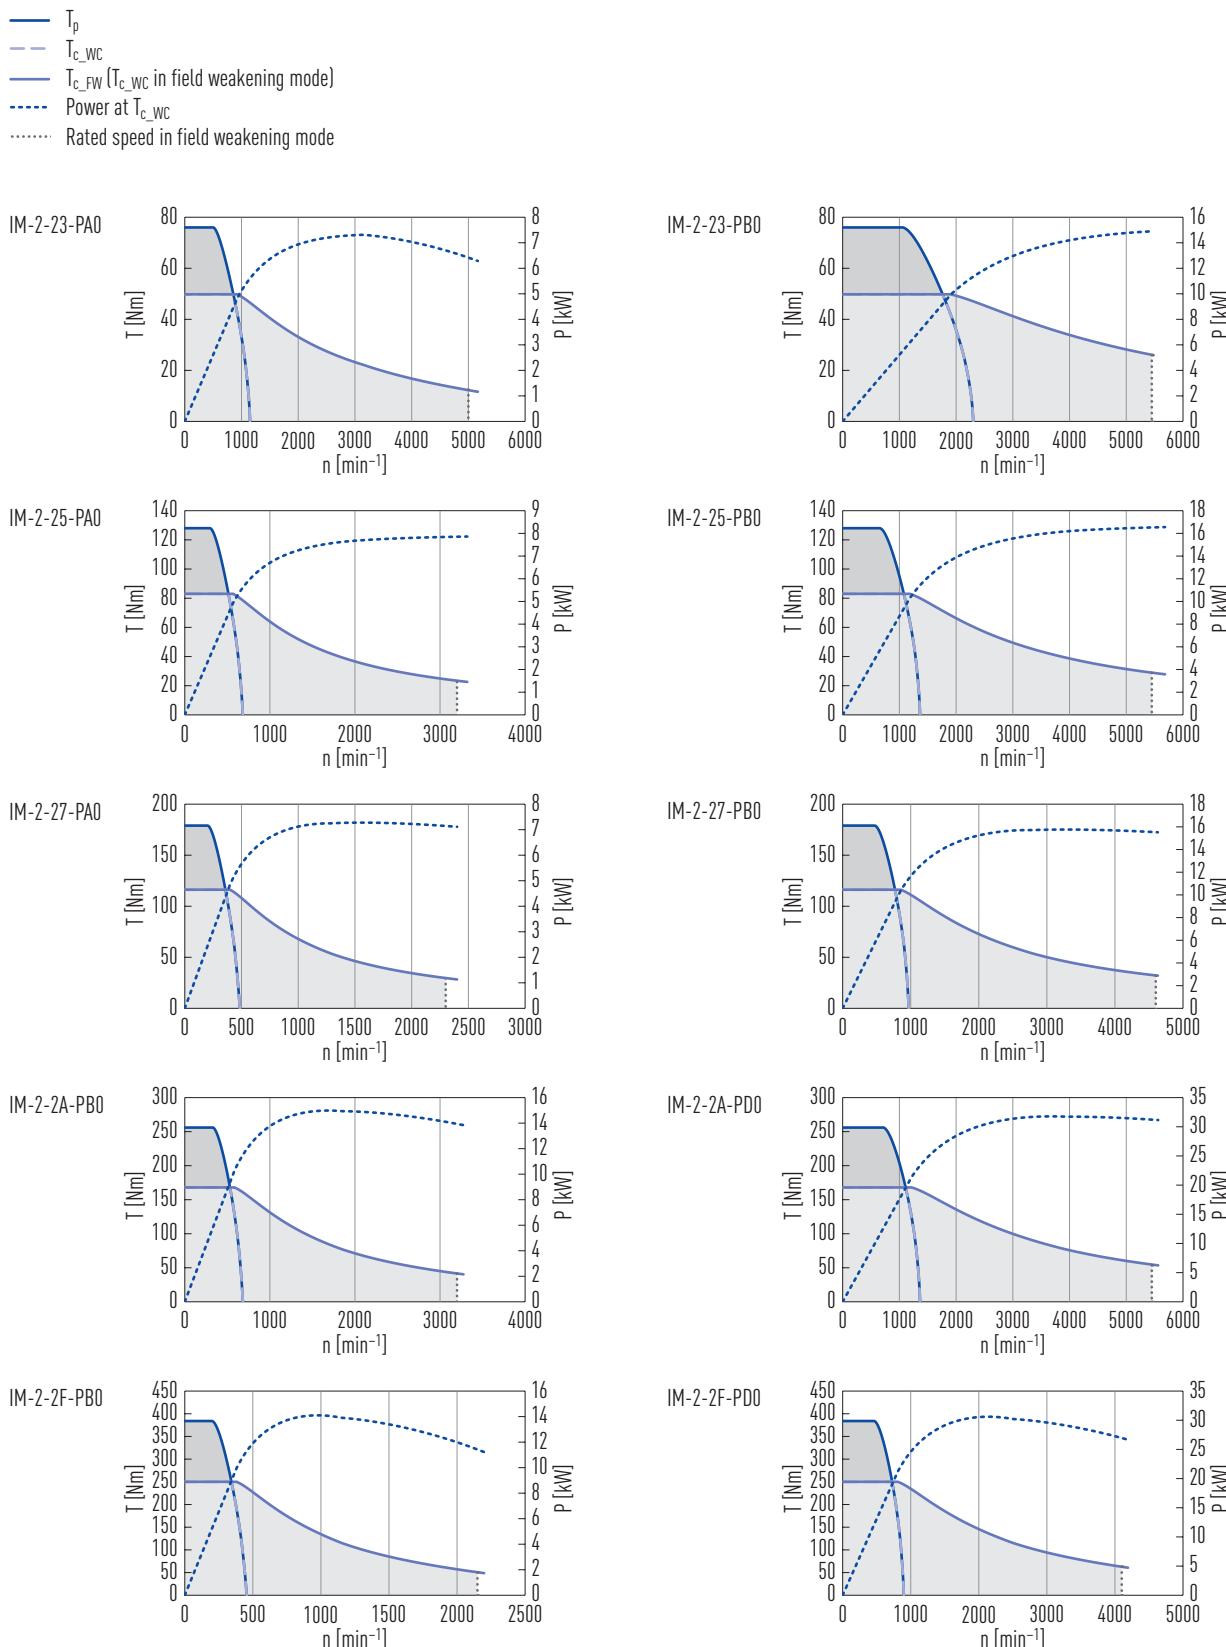

Torque Motors

HIWIN torque motors IM-2


Table 6.1 Technical data for IM-2-2

	Symbol	Unit	IM-2-23-PA0	IM-2-23-PBO	IM-2-25-PA0	IM-2-25-PBO	IM-2-27-PA0	IM-2-27-PBO	IM-2-2A-PA0	IM-2-2A-PBO	IM-2-2F-PA0	IM-2-2F-PBO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	76		128		179		256		384	
Continuous torque (WC)	T _{c_WC}	Nm	49.8		83.0		116.2		168.0		250.0	
Stall torque (WC)	T _{s_WC}	Nm	42	42	70	70	98	98	141	141	210	210
Peak current (for 1 sec.)	I _p	A	25.5	51.0	25.5	51.0	25.5	51.0	51.0	102	51.0	102.0
Continuous current (WC)	I _{c_WC}	A	10.2	20.4	10.2	20.4	10.2	20.4	20.4	40.8	20.4	40.8
Stall current (WC)	I _{s_WC}	A	8.2	16.3	8.2	16.3	8.2	16.3	16.3	32.6	16.3	32.6
Resistance¹⁾	R ₂₅	Ω	3.50	0.90	5.20	1.30	6.90	1.70	2.40	0.60	3.40	0.85
Inductance¹⁾	L ₂₅	mH	25.5	6.4	37.6	9.4	49.7	12.4	17.0	4.3	24.6	6.2
Motor constant	K _m	Nm/√W	2.41	2.38	3.35	3.35	4.09	4.12	4.92	4.92	6.21	6.21
Electrical time constant	K _e	ms	7.3	7.1	7.2	7.2	7.2	7.3	7.1	7.2	7.2	7.3
Torque constant	K _t	Nm/A	5.54	2.77	9.35	4.68	13.16	6.58	9.35	4.68	14.03	7.10
Back emf constant	K _u	V _{eff} /(rad/s)	3.2	1.6	5.4	2.7	7.6	3.8	5.4	2.7	8.1	4.1
Inertia of rotor	J	kgm ²	0.0051		0.0079		0.0107		0.0146		0.0215	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.192	0.187	0.129	0.129	0.098	0.099	0.070	0.070	0.049	0.049
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	856	1,763	513	1,078	358	769	531	1,110	342	726
Max. speed at T_p	n	min ⁻¹	477	1,004	289	641	196	462	313	686	193	449
Rated speed	n _N	min ⁻¹	5,000	5,450	3,200	5,450	2,300	4,600	3,200	5,450	2,150	4,100
Mechanical parameters												
Number of poles	2p		22									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	80		100		120		150		200	
Rotor height	H _R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M _r	kg	2.74		4.09		5.43		7.43		10.79	
Stator mass	M _s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line

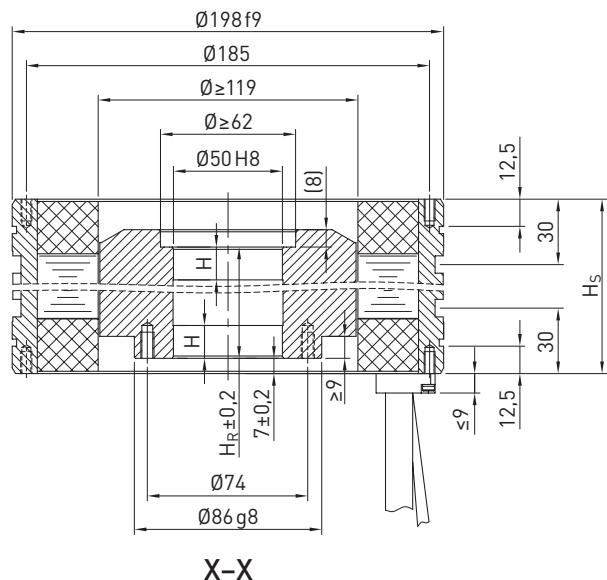
Dimensions IM-2-2


X-X

IM-2-23, IM-2-25, IM-2-27

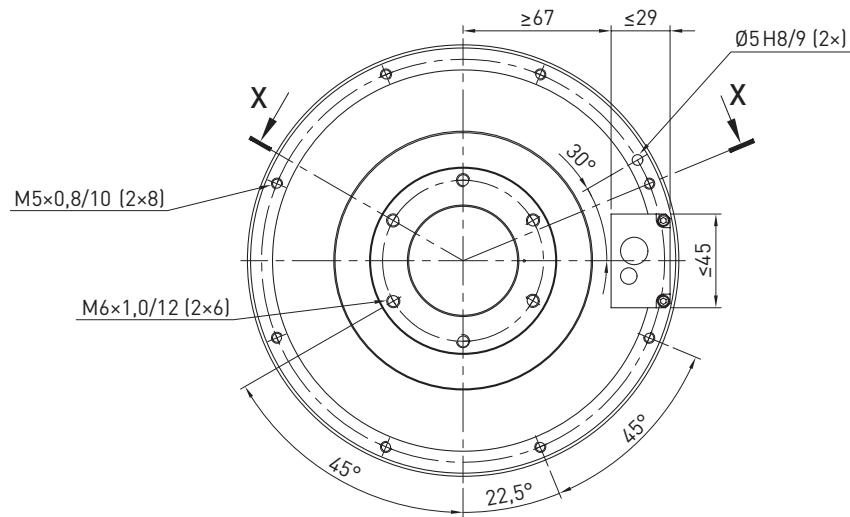

IM-2-2A, IM-2-2F

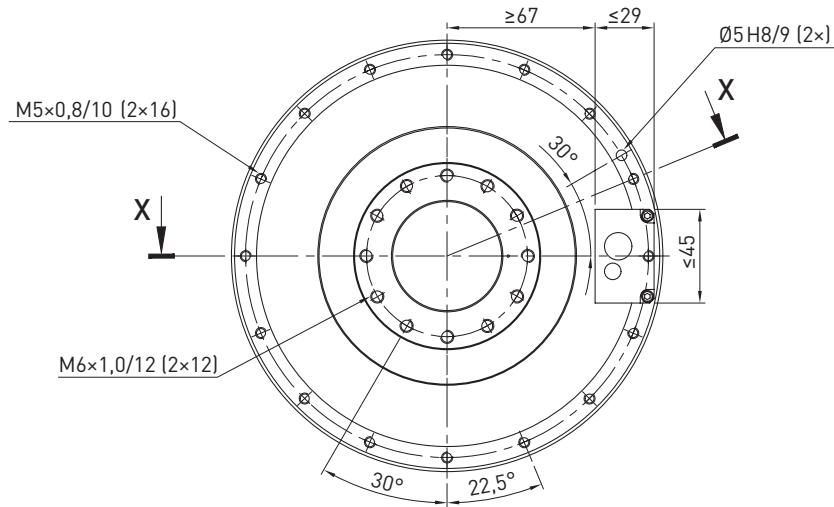

Torque Motors

HIWIN torque motors IM-2

6.4.2 IM-2-4 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - T_{c_WC}
- T_{c_FW} (T_{c_WC} in field weakening mode)
- Power at T_{c_WC}
- Rated speed in field weakening mode

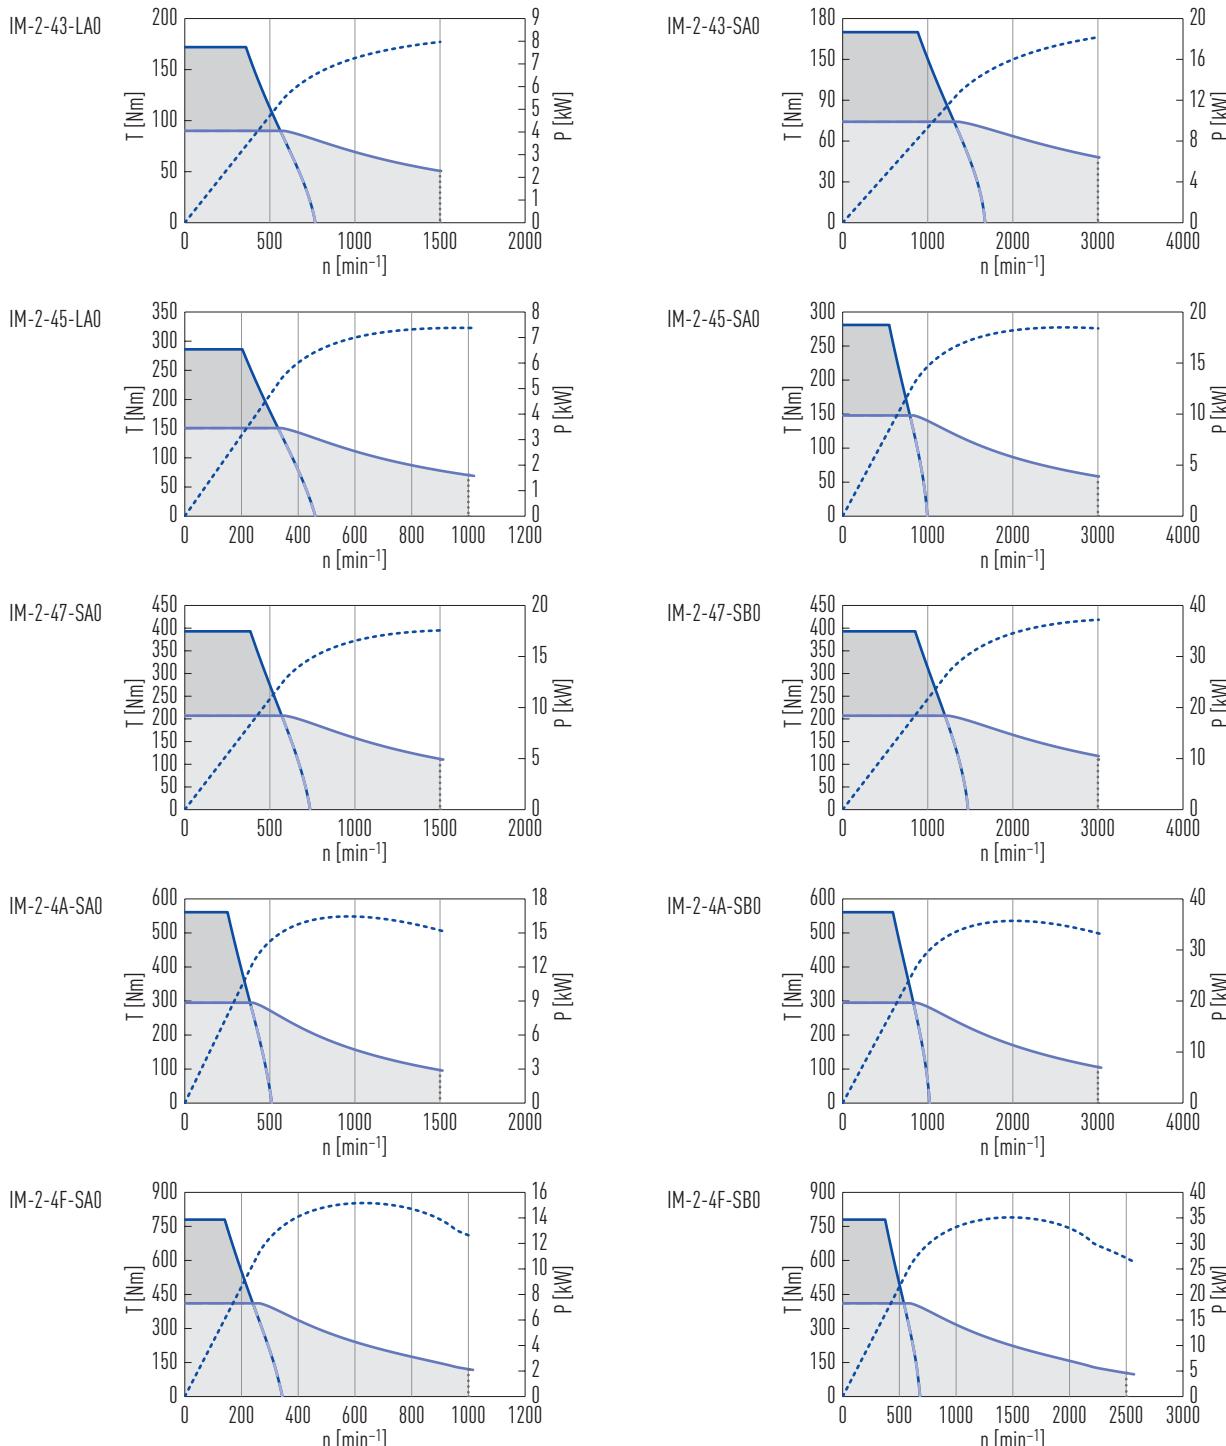


Table 6.2 Technical data for IM-2-4

	Symbol	Unit	IM-2-43-LAO	IM-2-43-SAO	IM-2-45-LAO	IM-2-45-SAO	IM-2-47-SAO	IM-2-47-SBO	IM-2-4A-SAO	IM-2-4A-SBO	IM-2-4F-SAO	IM-2-4F-SBO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	172	168	286	281	393	393	561	561	780	780
Continuous torque (WC)	T _{c_WC}	Nm	90	89	151	148	207	207	295	295	411	411
Stall torque (WC)	T _{s_WC}	Nm	73	72	122	120	168	168	239	239	336	336
Peak current (for 1 sec.)	I _p	A	23.7	52.0	23.7	52.0	52.0	104.0	52.0	104.0	52.0	104.0
Continuous current (WC)	I _{c_WC}	A	11.4	24.9	11.4	24.9	24.9	49.8	24.9	49.8	24.9	49.8
Stall current (WC)	I _{s_WC}	A	9.1	19.9	9.1	19.9	19.9	39.8	19.9	39.8	19.9	39.8
Resistance¹⁾	R ₂₅	Ω	5.6	1.2	8.3	1.72	2.3	0.6	3.1	0.8	4.5	1.1
Inductance¹⁾	L ₂₅	mH	16.8	3.5	23.8	5.1	6.8	1.7	9.3	2.3	13.4	3.4
Motor constant	K _m	Nm/√W	2.86	2.84	3.89	3.93	4.60	4.51	5.74	5.65	7.09	7.17
Electrical time constant	K _e	ms	3.0	2.9	2.9	3.0	3.0	2.8	3.0	2.9	3.0	3.1
Torque constant	K _t	Nm/A	8.31	3.81	13.86	6.41	8.66	4.33	12.47	6.24	18.53	9.35
Back emf constant	K _u	V _{eff} /(rad/s)	4.8	2.2	8.0	3.7	5.0	2.5	7.2	3.6	10.7	5.4
Inertia of rotor	J	kgm ²	0.018		0.027		0.036		0.049		0.071	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.096	0.094	0.065	0.066	0.049	0.047	0.036	0.035	0.025	0.026
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	561	1,310	328	790	570	1,203	384	831	240	539
Max. speed at T_p	n	min ⁻¹	359	883	203	546	385	852	251	590	140	374
Rated speed	n _N	min ⁻¹	1,500	3,000	1,000	3,000	1,500	3,000	1,500	3,000	1,000	2,500
Mechanical parameters												
Number of poles	2p		40									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	70		90		110		140		190	
Rotor height	H _R	mm	58		78		98		128		178	
Length of rotor centring fit	H	mm	17		17		17		17		17	
Rotor mass	M _r	kg	3.7		5.4		7.2		9.6		13.9	
Stator mass	M _s	kg	6.5		9.0		11.2		15.0		22.2	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors IM-2


Dimensions IM-2-4

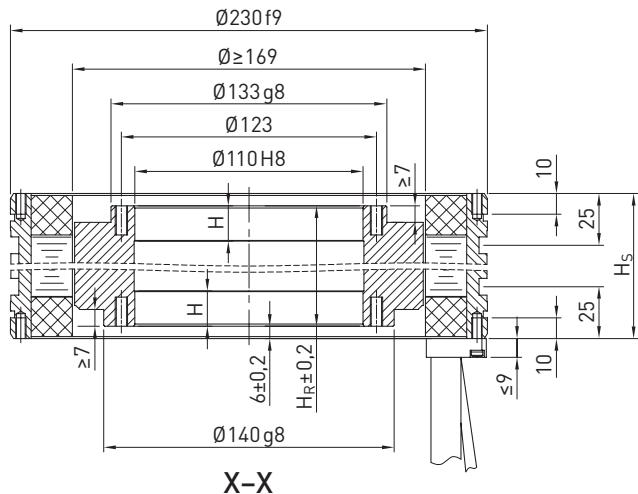

IM-2-43, IM-2-45, IM-2-47

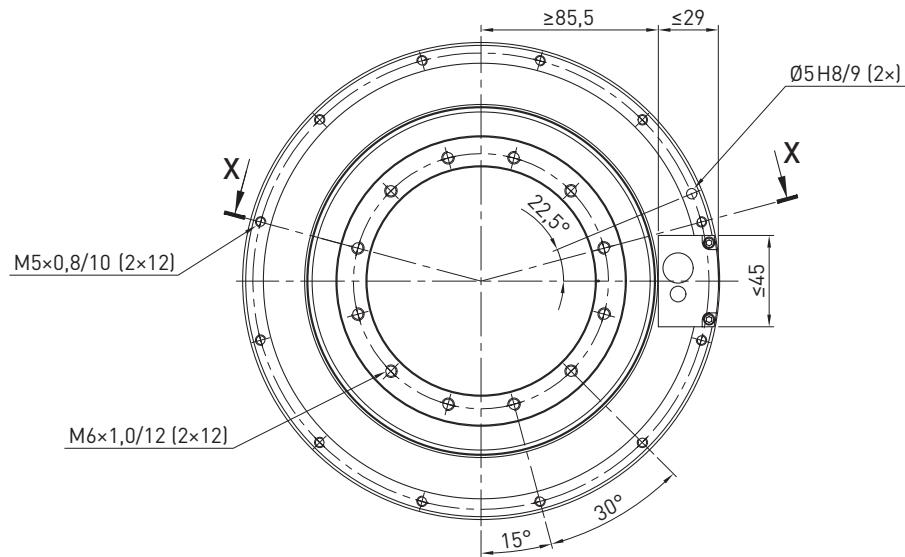


IM-2-4A, IM-2-4F

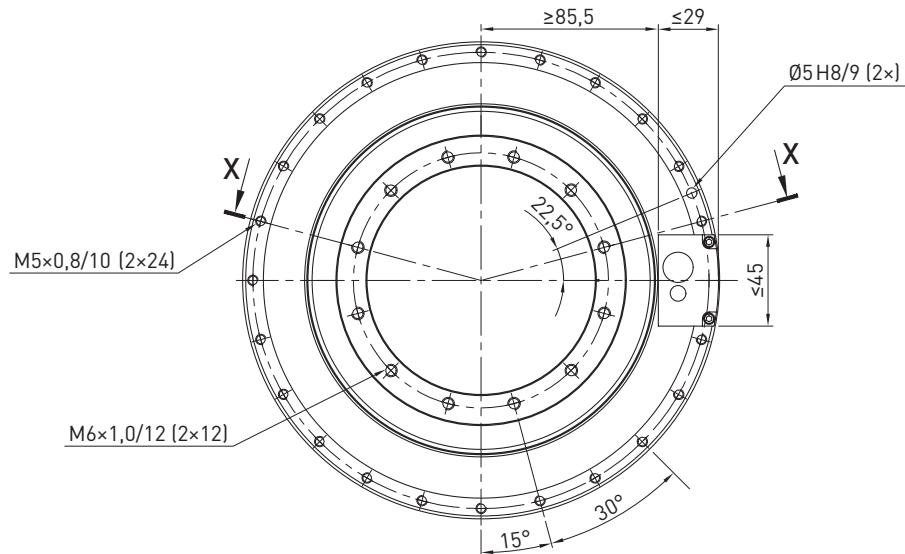

6.4.3 IM-2-7 specifications

Torque-speed curves (DC bus voltage: 600 VDC)

— T_p
 - - - T_{c_WC}
 — T_{c_FW} (T_{c_WC} in field weakening mode)
 - - - Power at T_{c_WC}
 Rated speed in field weakening mode

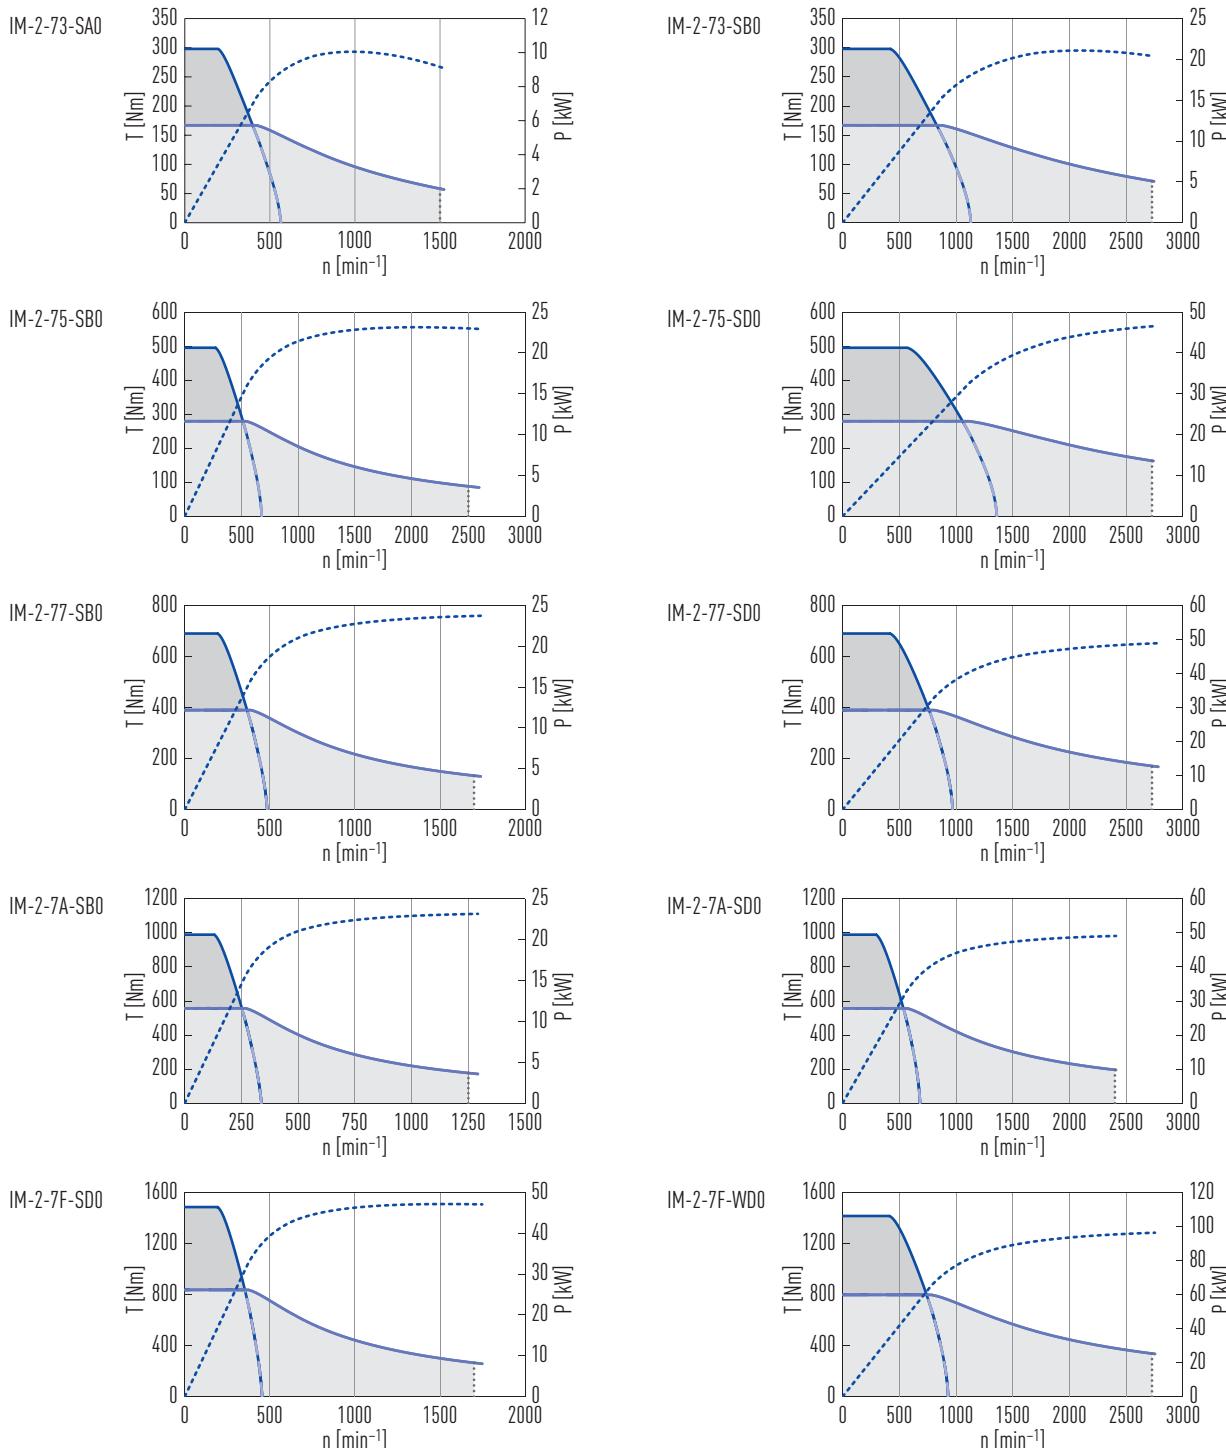

Torque Motors

HIWIN torque motors IM-2

Table 6.3 Technical data for IM-2-7


	Symbol	Unit	IM-2-73-SAO	IM-2-73-SBO	IM-2-75-SBO	IM-2-75-SDO	IM-2-77-SBO	IM-2-77-SDO	IM-2-7A-SBO	IM-2-7A-SDO	IM-2-7F-SDO	IM-2-7F-WDO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	298		495		690		990		1,485	1,415
Continuous torque (WC)	T _{c_WC}	Nm	167		279		390		557		836	797
Stall torque (WC)	T _{s_WC}	Nm	138	137	229	229	321	321	458	458	688	656
Peak current (for 1 sec.)	I _p	A	44.2	88.3	88.3	176.6	88.3	176.6	88.3	176.6	176.6	344.0
Continuous current (WC)	I _{c_WC}	A	16.2	32.3	32.3	64.5	32.3	64.5	32.3	64.5	64.5	125.7
Stall current (WC)	I _{s_WC}	A	13.0	25.8	25.8	51.6	25.8	51.6	25.8	51.6	51.6	100.6
Resistance¹⁾	R ₂₅	Ω	2.70	0.68	1.00	0.25	1.32	0.33	1.80	0.45	0.65	0.17
Inductance¹⁾	L ₂₅	mH	18.10	4.52	6.65	1.66	8.80	2.20	12.00	3.00	4.30	1.13
Motor constant	K _m	Nm/√W	5.28	5.31	7.25	7.25	8.87	8.87	10.86	10.86	13.53	12.97
Electrical time constant	K _e	ms	6.7	6.6	6.7	6.6	6.7	6.7	6.7	6.7	6.6	6.6
Torque constant	K _t	Nm/A	11.29	5.65	9.41	4.69	13.16	6.58	18.88	9.35	14.03	6.86
Back emf constant	K _u	V _{eff} /rad/s	6.52	3.26	5.43	2.71	7.60	3.80	10.90	5.40	8.10	3.96
Inertia of rotor	J	kgm ²	0.071		0.104		0.138		0.187		0.271	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.099	0.099	0.067	0.067	0.051	0.051	0.037	0.037	0.026	0.026
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	399	829	512	1,057	366	761	251	535	353	740
Max. speed at T_p	n	min ⁻¹	195	420	268	567	192	416	129	293	192	411
Rated speed	n _N	min ⁻¹	1,500	2,730	2,500	2,730	1,700	2,730	1,250	2,400	1,700	2,730
Mechanical parameters												
Number of poles	2p		44									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	80		100		120		150		200	
Rotor height	H _R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M _r	kg	8.2		11.8		15.5		21.0		30.2	
Stator mass	M _s	kg	13.6		17.9		22.3		28.9		40.6	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

WC: with water cooling


¹⁾ Line to line

Dimensions IM-2-7

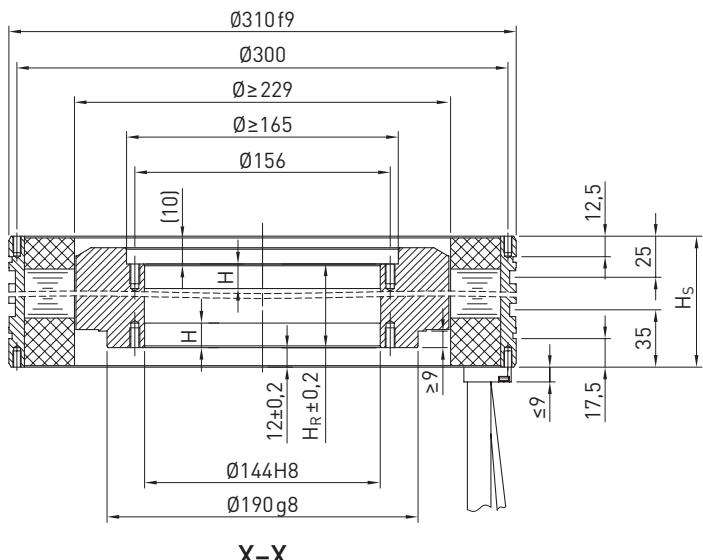


X-X

IM-2-73, IM-2-75, IM-2-77

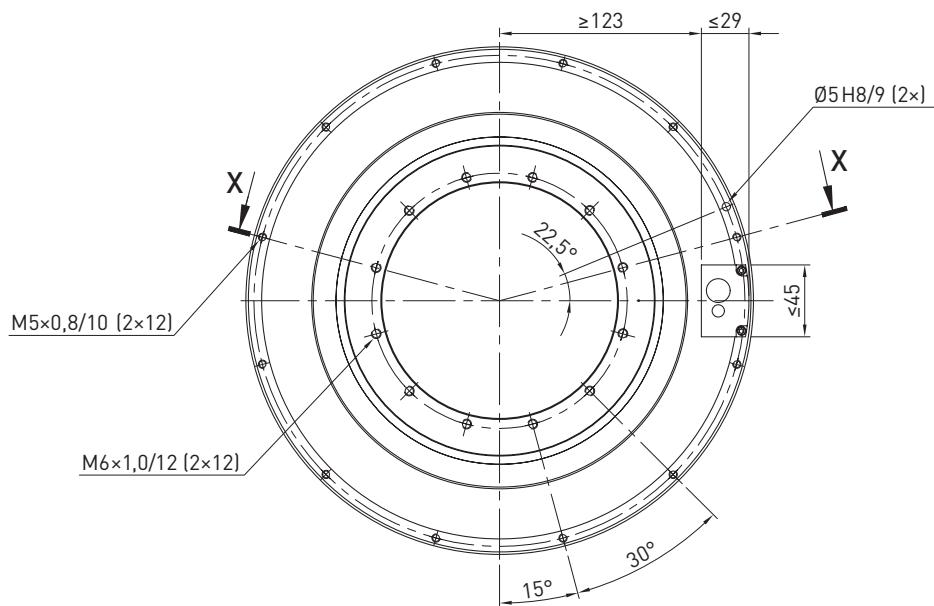

IM-2-7A, IM-2-7F

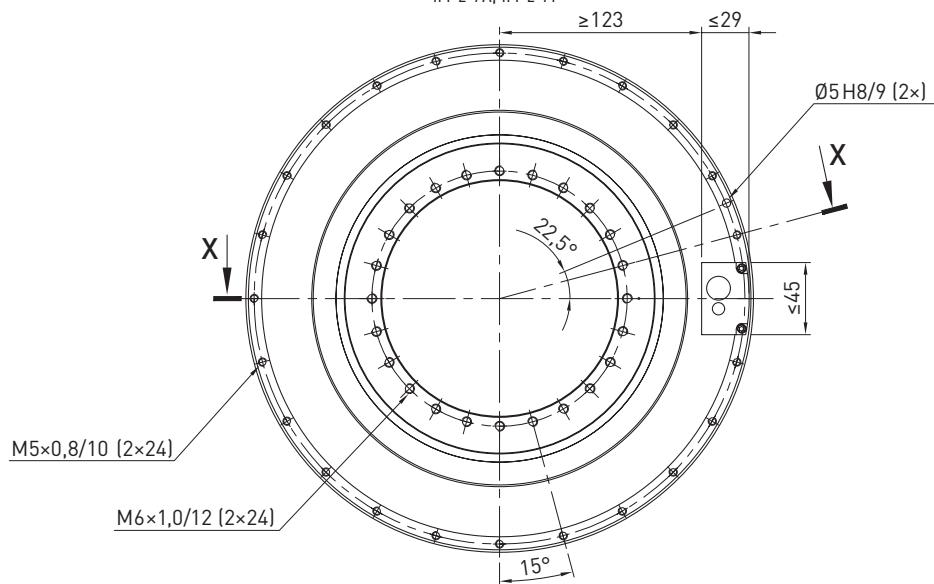

Torque Motors

HIWIN torque motors IM-2

6.4.4 IM-2-A specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - T_{c_WC}
- T_{c_FW} (T_{c_WC} in field weakening mode)
- Power at T_{c_WC}
- Rated speed in field weakening mode

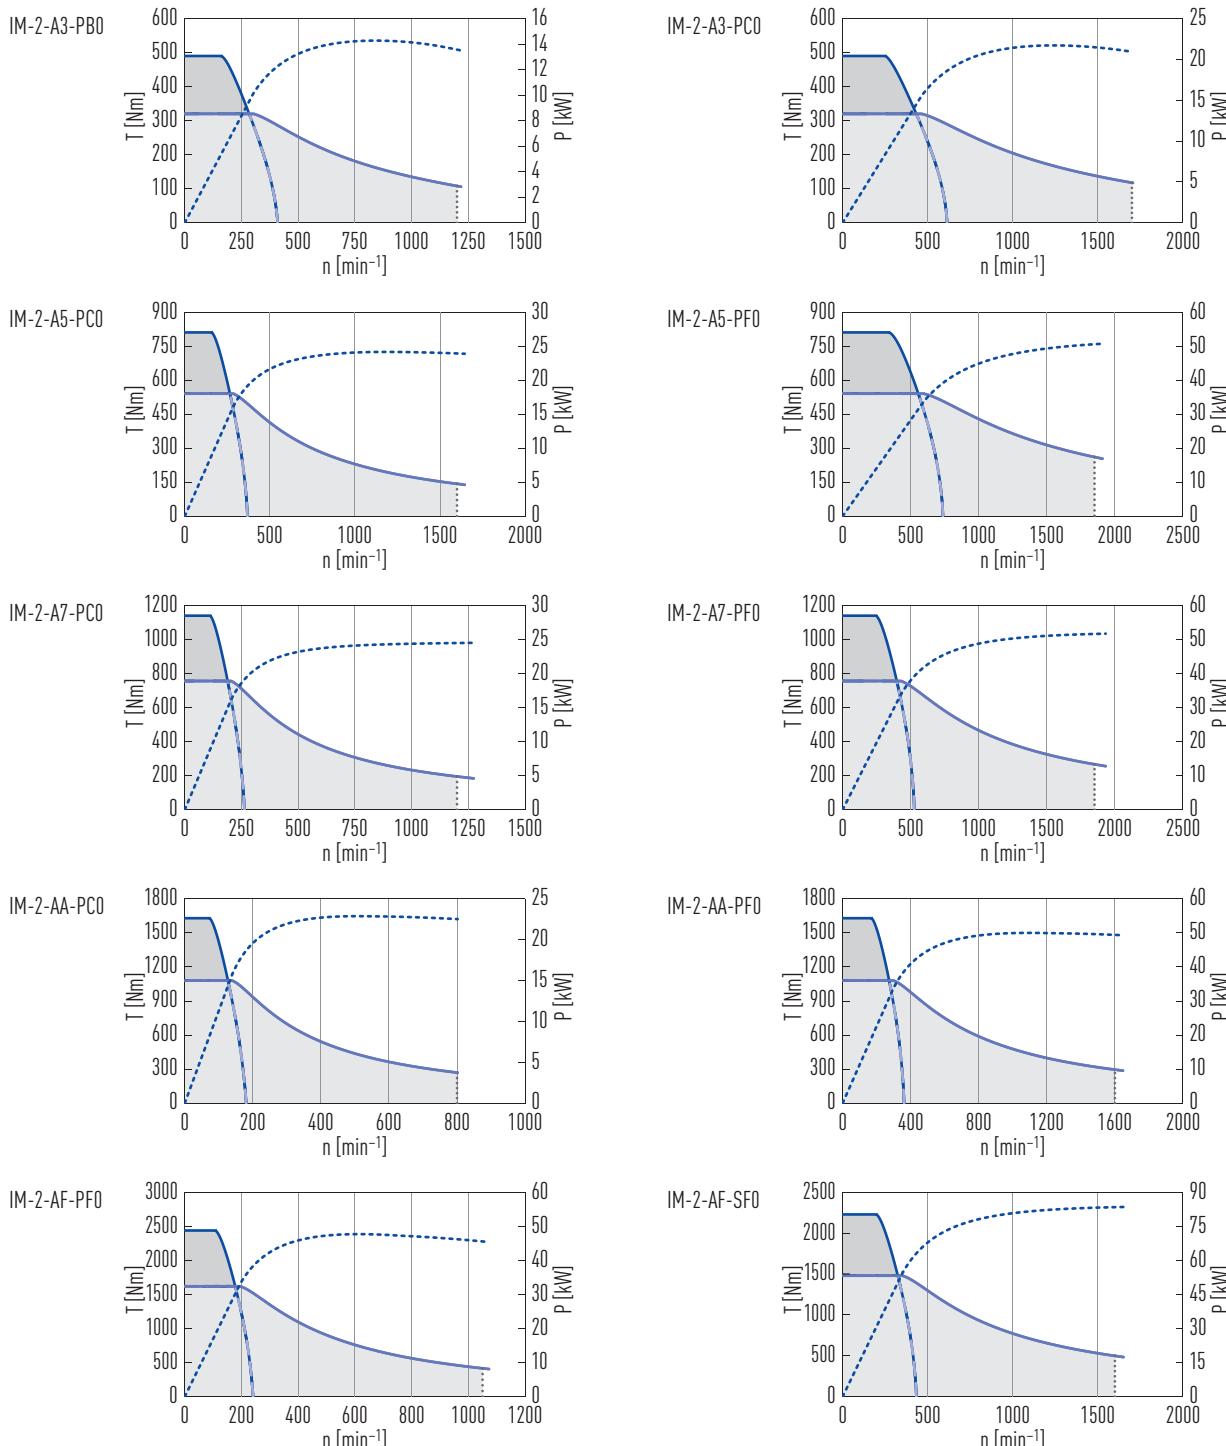


Table 6.4 Technical data for IM-2-A

	Symbol	Unit	IM-2-A3-PBO	IM-2-A3-PCO	IM-2-A5-PCO	IM-2-A5-PFO	IM-2-A7-PCO	IM-2-A7-PFO	IM-2-AA-PCO	IM-2-AA-PFO	IM-2-AF-PFO	IM-2-AF-PFO
Torques and electrical parameters												
Peak torque (for 1 sec.)	T _p	Nm	490		810		1,140		1,630		2,440	2,230
Continuous torque (WC)	T _{c_WC}	Nm	320		540		756		1,080		1,620	1,480
Stall torque (WC)	T _{s_WC}	Nm	268	268	453	453	634	634	907	907	1,361	1,242
Peak current (for 1 sec.)	I _p	A	52	78	78	156	78	156	78	156	156	255
Continuous current (WC)	I _{c_WC}	A	23.0	35.0	35.0	70.0	35.0	70.0	35.0	70.0	70.0	114.4
Stall current (WC)	I _{s_WC}	A	18.4	28.0	28.0	56.0	28.0	56.0	28.0	56.0	56.0	91.5
Resistance¹⁾	R ₂₅	Ω	1.80	0.82	1.20	0.30	1.60	0.40	2.20	0.55	0.80	0.30
Inductance¹⁾	L ₂₅	mH	12.4	5.5	8.2	2.0	10.8	2.7	14.8	3.7	5.4	2.0
Motor constant	K _m	Nm/√W	9.43	9.32	12.86	12.86	15.65	15.65	19.40	19.40	24.19	21.94
Electrical time constant	K _e	ms	6.9	6.7	6.8	6.7	6.8	6.8	6.7	6.7	6.8	6.7
Torque constant	K _t	Nm/A	15.59	10.39	17.32	8.66	24.25	12.12	35.33	17.67	26.50	14.72
Back emf constant	K _u	V _{eff} /rad/s	9.0	6.0	10.0	5.0	14.0	7.0	20.4	10.2	15.3	8.5
Inertia of rotor	J	kgm ²	0.185		0.270		0.355		0.482		0.694	
Thermal resistance (WC)	R _{th_WC}	°C/W	0.074	0.070	0.048	0.048	0.036	0.036	0.026	0.026	0.018	0.018
Max. DC bus voltage	U _{max}	VDC	750									
Max. speed at T_{c_WC}	n	min ⁻¹	283	432	265	555	188	397	126	273	177	324
Max. speed at T_p	n	min ⁻¹	161	252	158	342	112	245	73	170	108	199
Rated speed	n _N	min ⁻¹	1,200	1,700	1,600	1,850	1,200	1,850	800	1,600	1,050	1,600
Mechanical parameters												
Number of poles	2p		66									
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000									
Stator height	H _S	mm	90		110		130		160		210	
Rotor height	H _R	mm	51		71		91		121		171	
Length of rotor centring fit	H	mm	15		20		20		20		20	
Rotor mass	M _r	kg	11.3		16.3		21.3		28.7		41.2	
Stator mass	M _s	kg	20.1		26.8		34.5		44.9		63.1	

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature


WC: with water cooling

¹⁾ Line to line


Torque Motors

HIWIN torque motors IM-2


Dimensions IM-2-A

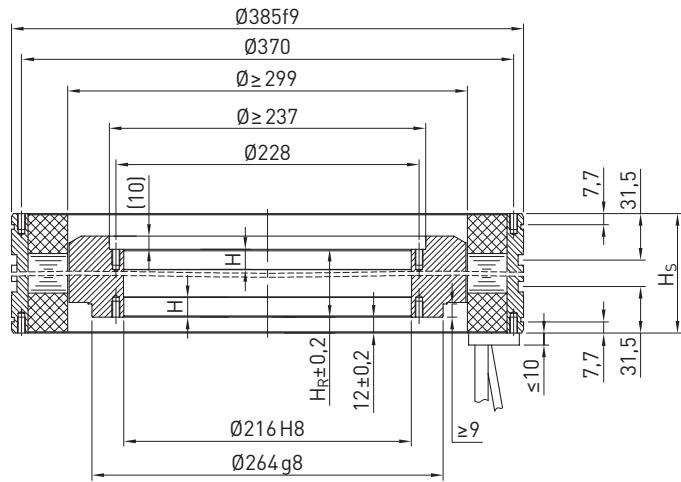


X-X

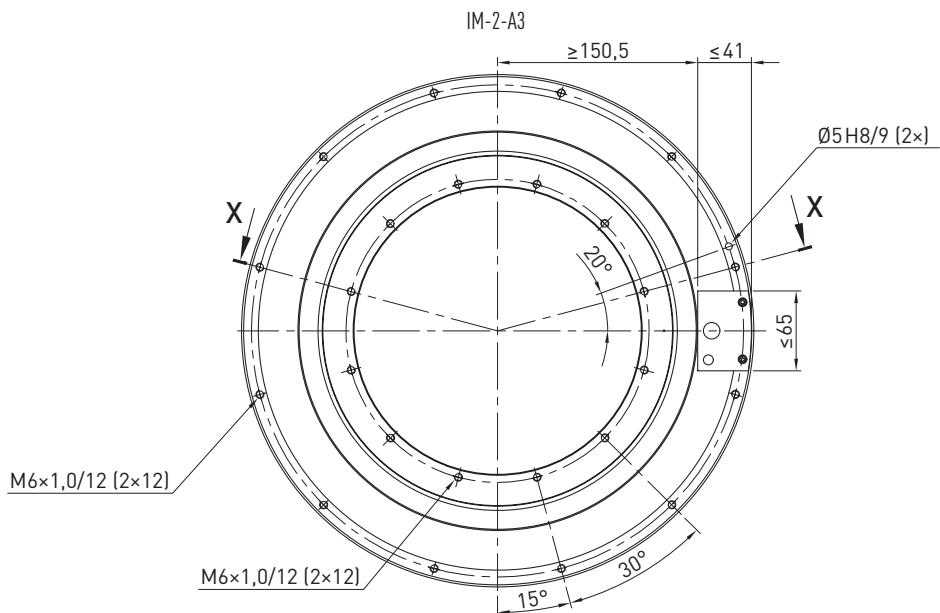


IM-2-A5, IM-2-A7

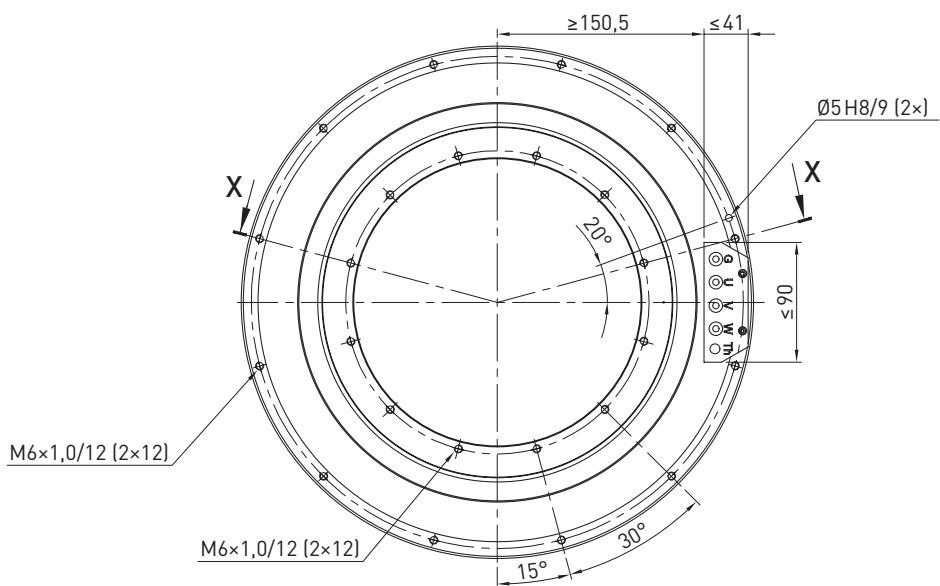

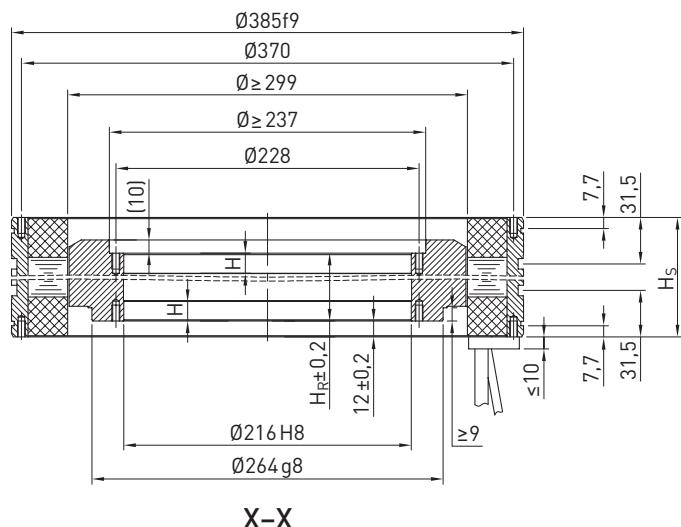

X-X

IM-2-A5, IM-2-A7

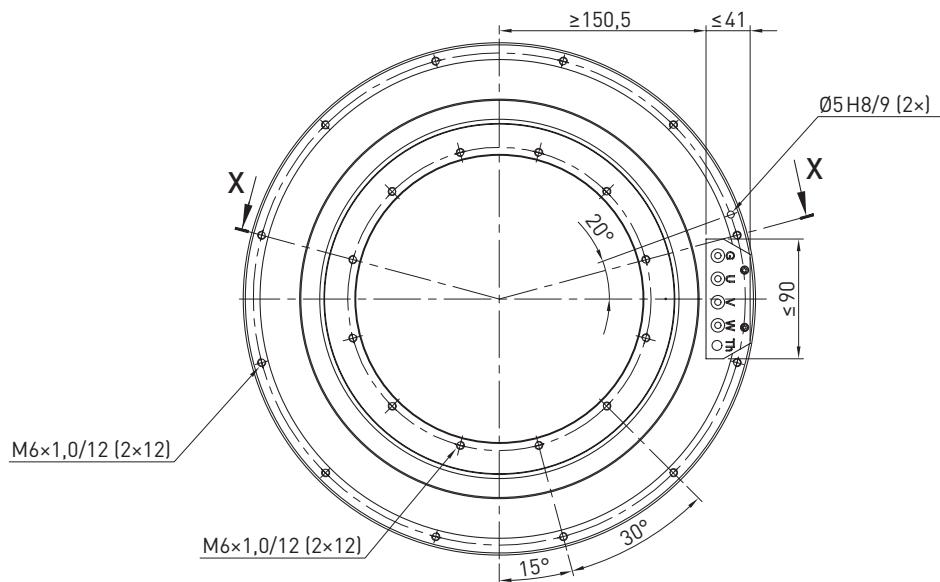

Torque Motors

HIWIN torque motors IM-2

6.4.5 IM-2-G specifications

Torque-speed curves (DC bus voltage: 600 VDC)

- T_p
- - T_{c_WC}
- T_{c_FW} (T_{c_WC} in field weakening mode)
- Power at T_{c_WC}
- Rated speed in field weakening mode

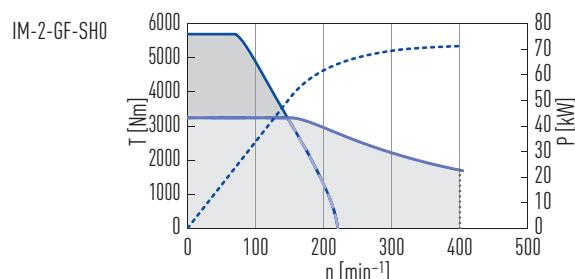
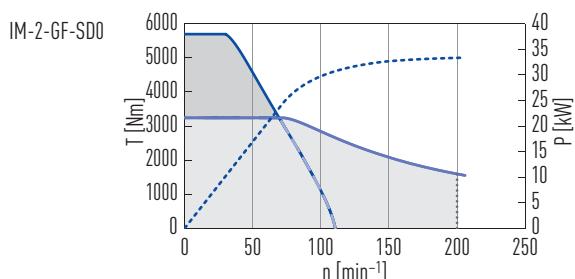
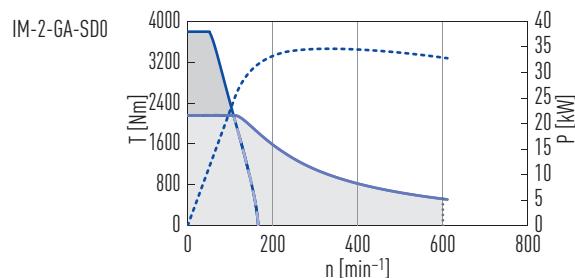
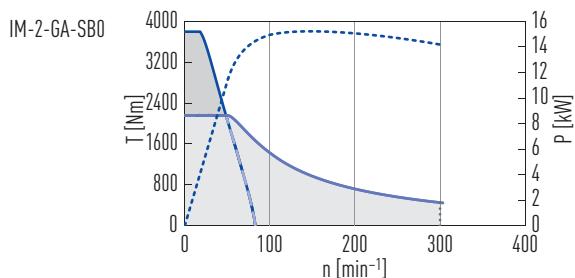
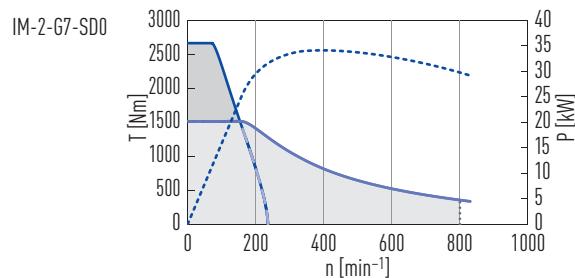
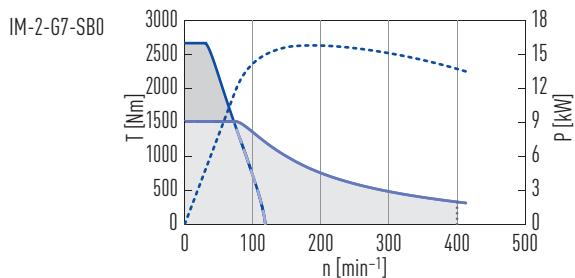
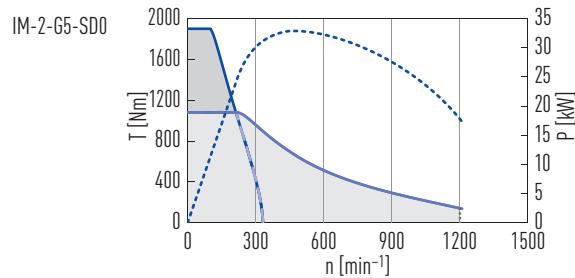
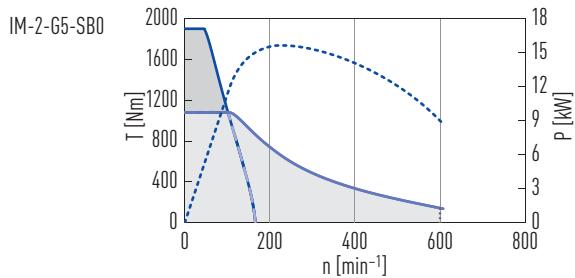


Table 6.5 Technical data for IM-2-G

	Symbol	Unit	IM-2-G5-SBO	IM-2-G5-SDO	IM-2-G7-SBO	IM-2-G7-SDO	IM-2-GA-SBO	IM-2-GA-SDO	IM-2-GF-SBO	IM-2-GF-SDO	
Torques and electrical parameters											
Peak torque (for 1 sec.)	T _p	Nm	1,900		2,660		3,800		5,700		
Continuous torque (WC)	T _{c_WC}	Nm	1,080		1,510		2,160		3,240		
Stall torque (WC)	T _{s_WC}	Nm	890	892	1,245	1,247	1,781	1,784	2,376	2,676	
Peak current (for 1 sec.)	I _p	A	80	160	80	160	80	160	160	320	
Continuous current (WC)	I _{c_WC}	A	30.3	60.6	30.3	60.6	30.3	60.6	60.6	121.2	
Stall current (WC)	I _{s_WC}	A	24.2	48.5	24.2	48.5	24.2	48.5	48.5	97.0	
Resistance¹⁾	R ₂₅	Ω	2.10	0.53	2.75	0.70	3.76	0.94	1.40	0.40	
Inductance¹⁾	L ₂₅	mH	21.0	5.3	27.8	7.0	38.0	9.5	13.8	3.5	
Motor constant	K _m	Nm/√W	21.13	21.03	25.85	25.62	31.58	31.58	38.82	36.31	
Electrical time constant	K _e	ms	10.0	10.0	10.1	10.0	10.1	10.1	9.9	8.8	
Torque constant	K _t	Nm/A	38.45	19.23	53.87	27.02	76.90	38.45	57.68	28.93	
Back emf constant	K _u	V _{eff} /(rad/s)	22.2	11.1	31.1	15.6	44.4	22.2	33.3	16.7	
Inertia of rotor	J	kgm ²	1.14		1.60		2.28		3.42		
Thermal resistance (WC)	R _{th_WC}	°C/W	0.31	0.31	0.24	0.23	0.17	0.17	0.12	0.10	
Max. DC bus voltage	U _{max}	VDC	750								
Max. speed at T_{c_WC}	n	min ⁻¹	101	212	72	153	48	108	69	146	
Max. speed at T_p	n	min ⁻¹	45	100	30	72	17	50	29	70	
Rated speed	n _N	min ⁻¹	600	1,200	400	800	300	600	200	400	
Mechanical parameters											
Number of poles	2p		88								
Thermal sensors			PTC SNM 100; PTC SNM 130; PT1000								
Stator height	H _S	mm	110		130		160		210		
Rotor height	H _R	mm	81		101		131		181		
Length of rotor centring fit	H	mm	20		20		20		20		
Rotor mass	M _r	kg	27.1		38.1		54.3		81.5		
Stator mass	M _s	kg	50.0		63.5		78.0		111.8		

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature




WC: with water cooling

¹⁾ Line to line

Torque Motors

HIWIN torque motors IM-2

Dimensions IM-2-G

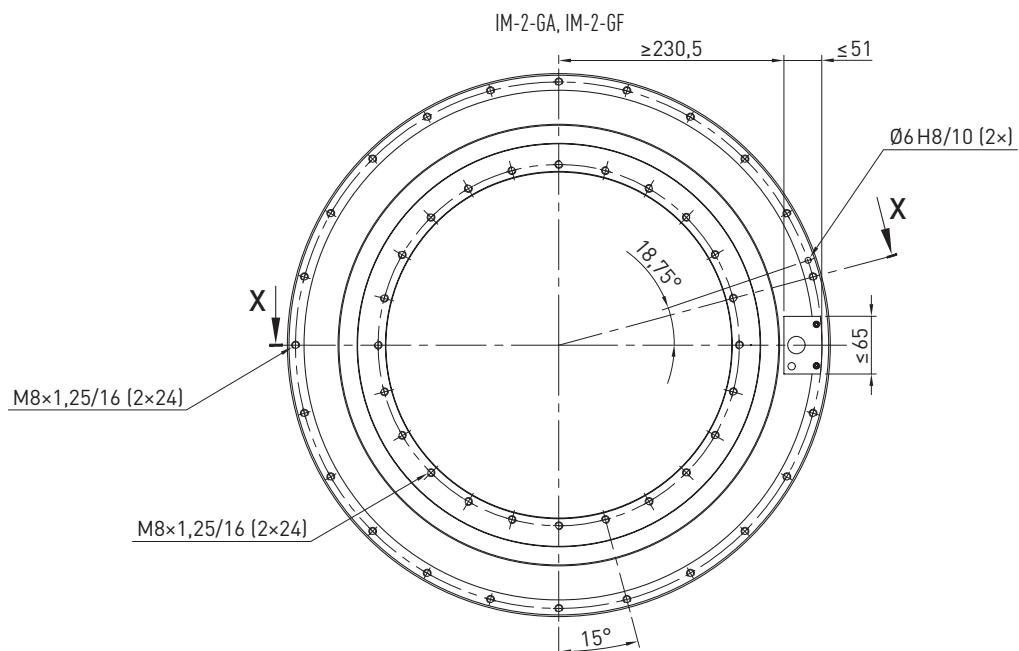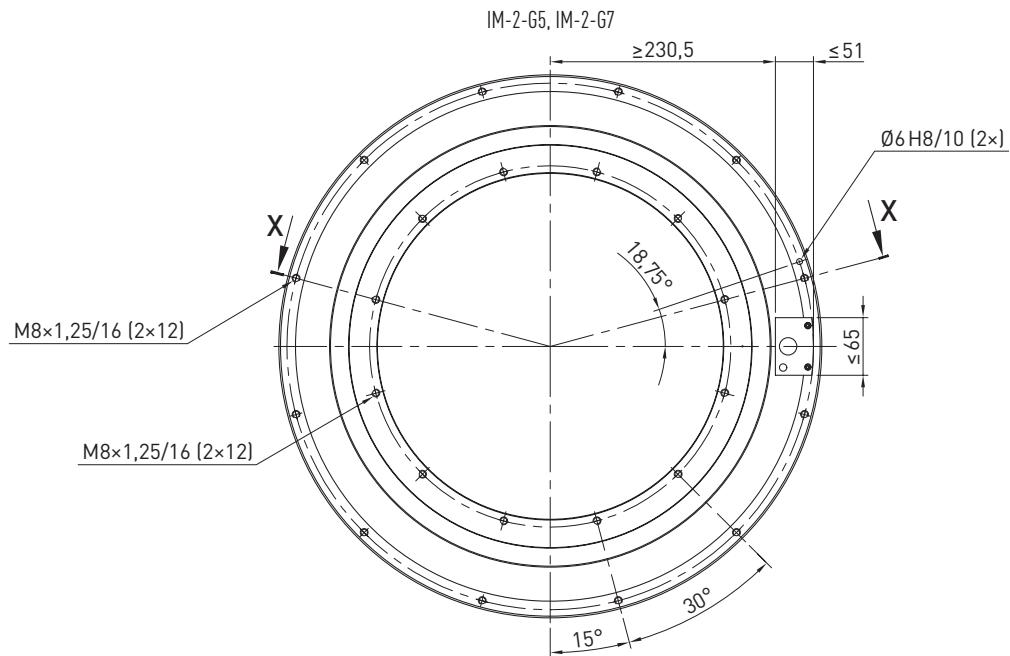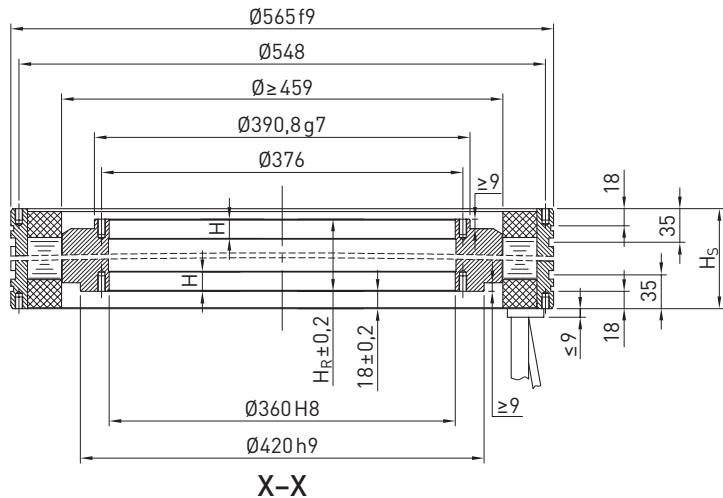

7. Options and accessories

7.1 Closed cooling jacket

For easy integration of our water-cooled torque motors, we also supply them in a closed version. The connection to the cooling unit is realised via 2 G $\frac{1}{8}$ threads in the stainless steel jacket. As in the version without a closed cooling jacket, the alignment of the motor is realised easily via the fit of the stator. Available for the series TMRW, TM-2 and IM-26.

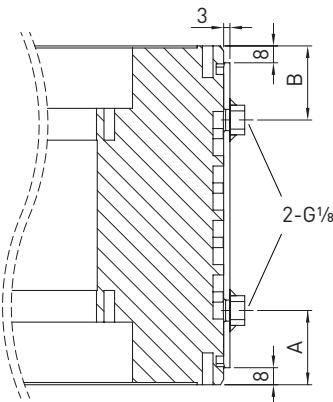


Table 7.1 Dimensions of steel cooling jacket

Torque motor ¹⁾	Dimension A [mm]	Dimension B [mm]
TMRW7, TM-2-7, IM-2-7	35	25
TMRWA, TM-2-A, IM-2-A	35	35
TMRWG, TM-2-G, IM-2-G	35	35
TMRWD, TM-2-D	27	43

¹⁾ All other sizes upon request

Torque Motors

Options and accessories

7.2 Cable outlet orientations of the torque motors

Table 7.2 Cable outlet orientations of the torque motors

 A cross-sectional view of a torque motor housing showing two orange cables exiting vertically upwards from the center.	Type S <ul style="list-style-type: none">○ Motor cables potted in the stator
 A cross-sectional view of a torque motor housing showing two orange cables exiting vertically upwards from the center, with a small additional strain relief plate visible.	Type V <ul style="list-style-type: none">○ Motor cables potted in the stator○ Additional strain relief plate
 A cross-sectional view of a torque motor housing showing two orange cables exiting vertically upwards from the center, with a small additional strain relief plate and two PG screw connections visible.	Type H <ul style="list-style-type: none">○ Motor cables potted in the stator○ Additional strain relief plate○ PG screw connections
 A cross-sectional view of a torque motor housing showing two orange cables exiting at a 90-degree angle from the side of the housing.	Type A <ul style="list-style-type: none">○ Motor cables potted in the stator○ Additional strain relief plate○ 90° cable outlet


We live motion.



Linear Guideways



Ballscrews

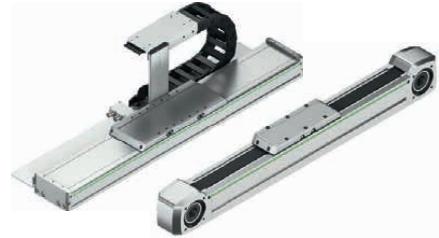

Linear Axes



Linear Axis Systems



Torque Motors



Robots



Linear Motor Components



Rotary Tables



Drives & Servo Motors

Germany
HIWIN GmbH
Brücklesbünd 1
D-77654 Offenburg
Phone +49 (0) 7 81 9 32 78-0
Fax +49 (0) 7 81 9 32 78-90
info@hiwin.de
www.hiwin.de

Taiwan
Headquarters
HIWIN Technologies Corp.
No. 7, Jingke Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2359-4510
Fax +886-4-2359-4420
business@hiwin.tw
www.hiwin.tw

Taiwan
Headquarters
HIWIN Mikrosystem Corp.
No. 6, Jingke Central Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2355-0110
Fax +886-4-2355-0123
business@hiwinmikro.tw
www.hiwinmikro.tw

France
HIWIN GmbH
4, Impasse Joffre
F-67202 Wolfisheim
Phone +33 (0) 3 88 28 84 80
info@hiwin.fr
www.hiwin.fr

Italy
HIWIN Srl
Via Pitagora 4
I-20861 Brugherio (MB)
Phone +39 039 287 61 68
Fax +39 039 287 43 73
info@hiwin.it
www.hiwin.it

Poland
HIWIN GmbH
ul. Puławska 405a
PL-02-801 Warszawa
Phone +48 22 544 07 07
Fax +48 22 544 07 08
info@hiwin.pl
www.hiwin.pl

Switzerland
HIWIN Schweiz GmbH
Eichwiesstrasse 20
CH-8645 Jona
Phone +41 (0) 55 225 00 25
Fax +41 (0) 55 225 00 20
info@hiwin.ch
www.hiwin.ch

Slovakia
HIWIN s.r.o., o.z.z.o.
Mládežnická 2101
SK-01701 Považská Bystrica
Phone +421 424 43 47 77
Fax +421 424 26 23 06
info@hiwin.sk
www.hiwin.sk

Czech Republic
HIWIN s.r.o.
Medkova 888/11
CZ-62700 Brno
Phone +42 05 48 528 238
Fax +42 05 48 220 223
info@hiwin.cz
www.hiwin.cz

Austria
HIWIN GmbH
info@hiwin.at
www.hiwin.at

Netherlands
HIWIN GmbH
info@hiwin.nl
www.hiwin.nl

Romania
HIWIN GmbH
info@hiwin.ro
www.hiwin.ro

Slovenia
HIWIN GmbH
info@hiwin.si
www.hiwin.si

Hungary
HIWIN GmbH
info@hiwin.hu
www.hiwin.hu

Denmark
HIWIN GmbH
info@hiwin.dk
www.hiwin.dk

China
HIWIN Corp.
www.hiwin.cn

Japan
HIWIN Corp.
mail@hiwin.co.jp
www.hiwin.co.jp

USA
HIWIN Corp.
info@hiwin.com
www.hiwin.com

Korea
HIWIN Corp.
www.hiwin.kr

Singapore
HIWIN Corp.
www.hiwin.sg