






MBCB15

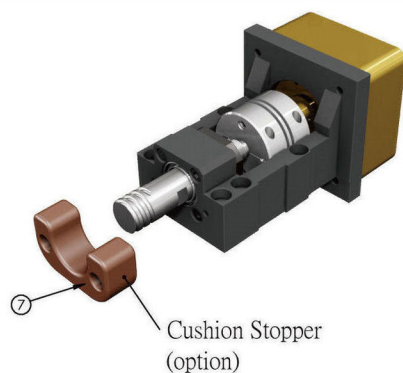

No.	Part name	Qty
1	Housing	1
2	MBCB15 Bearing 7002 MBCB15M Bearing 7202	1set
3	Holding lid	1
4	Collar thin thickness 10 Collar thin thickness 6	1 2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

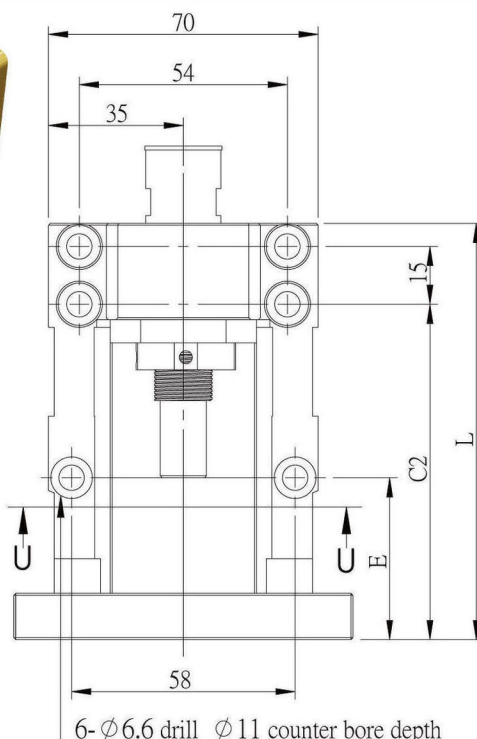

Surface treatment:
Black Oxide /
Electroless Nickel Plating

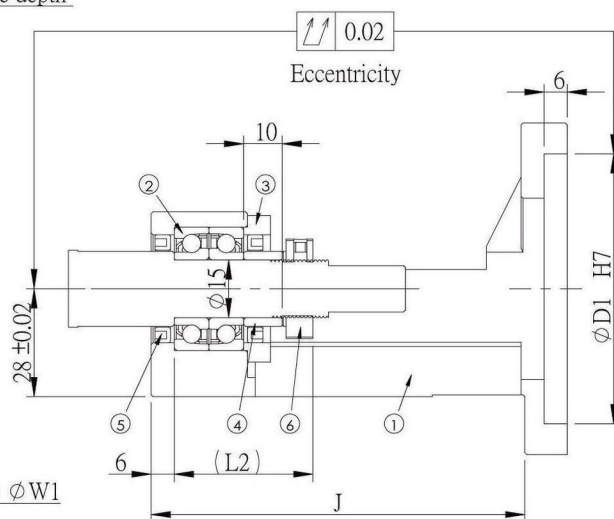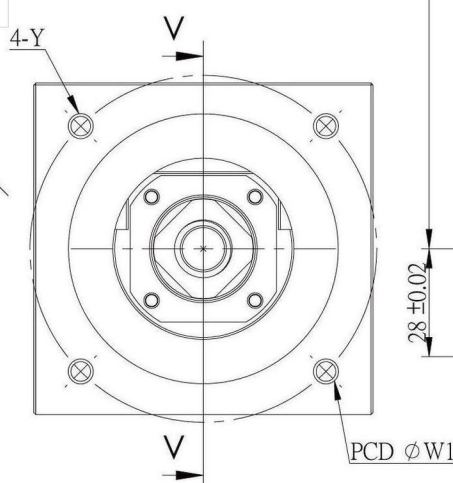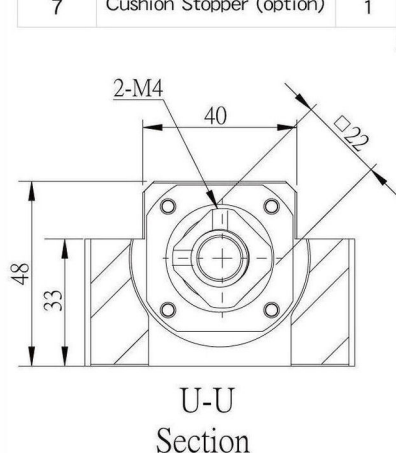

Unit : mm

Model No.	D1	W1	Y	L	L2	E	C2	J	Weight (Kgs)	Support unit	Suggest Coupling
										Supported-side	
MBCB15-D	50	70	M5	98	36	32	77	89	0.98	BF 15	SGS 34C SGS 40C
MBCB15-DP			M4						0.99		
MBCB15-E	70	90	M6	108		42	87	97	1.39		SGS 40C SGS 45C
MBCB15-EP			M5						1.45		
MBCB15M-E			M6	-							
MBCB15M-EP			M5	-							

Note :

1.Bearings made preload , and axial clearance is 0 mm.

2.DF type, P5 grade preloaded duplex angular contact ball bearing suitable for ballscrew use.