


HIWIN®

Motion Control & Systems

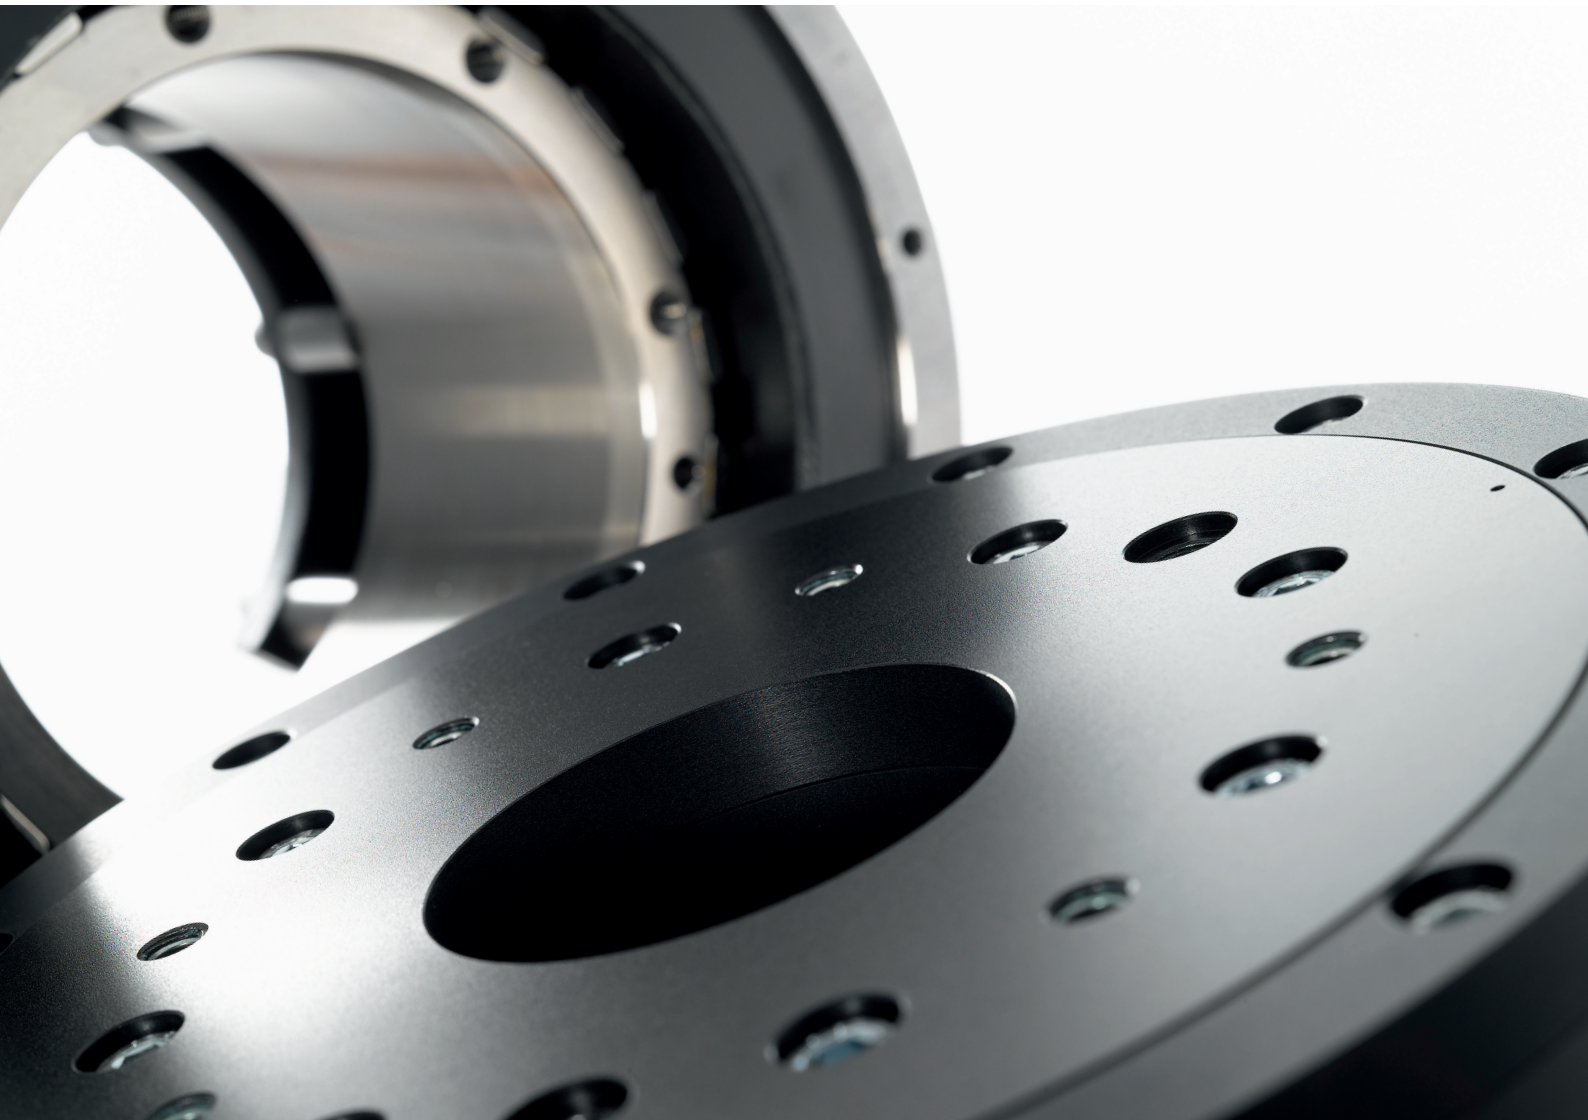

Rotary Tables

Motors, Drives & Accessories

Rotary Tables

Directly-driven rotary tables from HIWIN have a backlash-free and very rigid design, making them highly versatile. The compact design makes the tables easy to integrate and allows for a space-saving setup. Various diameters and heights simplify the process of selecting the right rotary table. On request, the rotary tables are also supplied as a complete system with drive.

Contents

1	Product overview	7
2	Sample applications	8
2.1	HIWIN rotary tables optimise transport processes	8
2.2	HIWIN rotary table in glass plate handling	8
3	HIWIN rotary tables DMS	9
3.1	Characteristics of the DMS rotary tables	9
3.2	Order code for DMS rotary tables	9
3.3	Technical data for DMS	10
3.3.1	Technical data for DMS0	10
3.3.2	Technical data for DMS1	12
3.3.3	Technical data for DMS3	14
3.3.4	Technical data for DMS7	16
4	HIWIN rotary tables DMN	18
4.1	Characteristics of the DMN rotary tables	18
4.2	Order code for DMN rotary tables	18
4.3	Technical data for DMN	19
4.3.1	Technical data for DMN42	19
4.3.2	Technical data for DMN71	21
4.3.3	Technical data for DMN93	23

Rotary Tables

Product overview

1. Product overview



HIWIN rotary tables DMS

[Page 9](#)

- Standard series
- Torques up to 450 Nm
- Integrated rotary encoder
- Outer diameter 110 – 300 mm
- With pneumatic clamping as an option



HIWIN rotary tables DMN

[Page 18](#)

- Extremely flat design
- Torques up to 39.6 Nm
- Outer diameter 118 – 230 mm
- Integrated rotary encoder

Rotary Tables

Sample applications

2. Sample applications


2.1 HIWIN rotary tables optimise transport processes

The specification

- Rapid positioning when transporting the work-pieces between the interlinked system parts on a vertical circular path = special requirements apply to acceleration and braking due to the short distances travelled
- Flexible solution, allowing changes or additions to be made during commissioning
- It should be possible for the system to be stopped in any position in order to inspect the parts

Our solution

- Swivel drive minimises the cycle times = saves time and money
- Centrifugal forces are reduced = transport components swiftly and gently to the next station with the gripper arm
- Precision bearing and optical distance measuring system = maximum reproducibility
- Design with hollow shaft = pass cables or mechanisms through with ease
- Direct drive = no gearbox backlash or gearbox mechanisms prone to wear

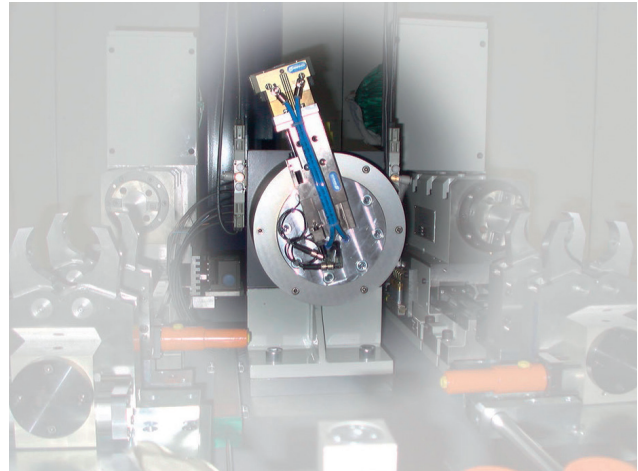


2.2 HIWIN rotary table in glass plate handling

The specification

- Lay-up station in which the finished strings are drawn in with special vacuum suckers after welding. The strings are then swivelled and deposited either in string boxes or on glass plates
- The current method of holding the Z-axis for the cross bar above toothed belt and servo motor is to be replaced because it takes up too much room and is too heavy
- A high level of torque and a compact design are needed due to the long swivel arm and high inherent weight of the arm
- High speed is needed because of the short cycle times required

Our solution

- Rotary indexing table = high torque and compact design = high throughput, space and cost savings
- Design with hollow shaft = pneumatic hoses and cables can pass through
- Direct drive = no gearbox clearance or gearbox mechanisms prone to wear
- Adaptation to existing control

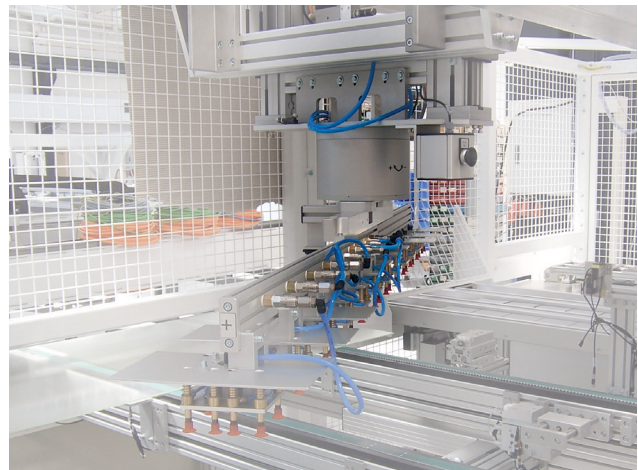

3. HIWIN rotary tables DMS

3.1 Characteristics of the DMS rotary tables

DMS rotary tables are directly driven rotary tables and do not therefore have a gearbox. The extremely rigid connection between the motor and load, coupled with a high-quality servo drive controller, ensures outstanding acceleration capabilities and movement with good uniformity. Due to the hollow shaft design, DMS rotary tables are especially well suited to automation tasks. Media, cable systems or mechanisms can pass through with ease.

Key features:


- Backlash-free and extremely dynamic
- Brush-less and high-torque
- Integrated optical rotary encoder

Typical applications:

- Automation technology
- Pick-and-place machines



3.2 Order code for DMS rotary tables

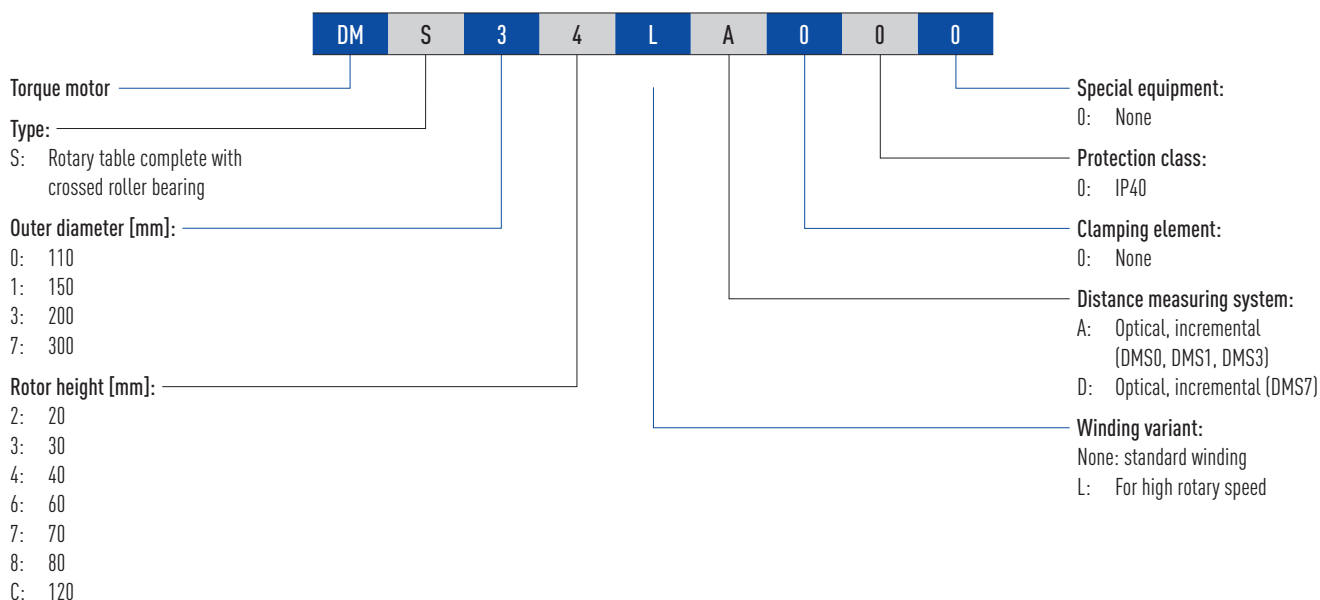

Rotary Tables

HIWIN rotary tables DMS

3.3 Technical data for DMS

3.3.1 Technical data for DMS0

Torque-speed curve (DC bus voltage: 560 VDC)

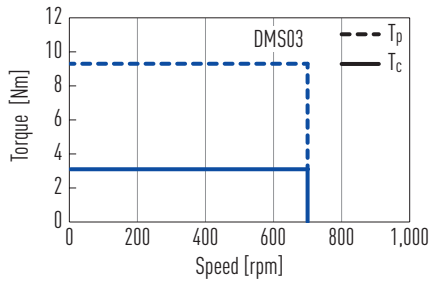


Table 3.1 Technical data for DMS0 HIWIN rotary tables

	Symbol	Unit	DMS03
Technical data of rotary table			
Peak torque (for 1 sec.)	T_p	Nm	9.3
Continuous torque	T_c	Nm	3.1
Stall torque	T_s	Nm	2.17
Inertia of rotating parts	J	kgm ²	0.003
Weight	M_m	kg	4
Max. axial load	F_a	N	3,700
Max. radial load	F_r	N	820
Max. moment of tilt	M_k	Nm	40
Nominal speed (at 400 VAC, 30 % duty cycle)	n	1/min	700
Position accuracy		arcsec	$\pm 45/\pm 10^{2)}$
Repeatability		arcsec	± 3
Radial run-out		mm	0.03
Axial run-out		mm	0.03
Protection class			IP40
Technical data of motor			
Peak current (for 1 sec.)	I_p	A_{eff}	6.0
Continuous current	I_c	A_{eff}	2.0
Motor constant	K_m	Nm/ \sqrt{W}	0.5
Resistance ¹⁾	R_{25}	Ω	7.1
Inductance ¹⁾	L	mH	15.2
Electrical time constant	T_e	ms	2.1
Torque constant	K_t	Nm/ A_{eff}	1.55
Back emf constant	K_u	$V_{eff}/(rad/s)$	0.82
Number of poles	$2p$		10
Thermal resistance	R_{th}	$^{\circ}C/W$	1.76
Thermal time constant	T_{th}	s	1,930
Thermal sensor			PTC SNM 100
Max. DC Bus		V	600

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

¹⁾ Line-to-line

²⁾ With error mapping

Encoder type A specifications (optical, incremental)

- 2,048 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

(For values, see [Table 3.1](#))



Rotary Tables

HIWIN rotary tables DMS

3.3.2 Technical data for DMS1

Torque-speed curves (DC bus voltage: 560 VDC)

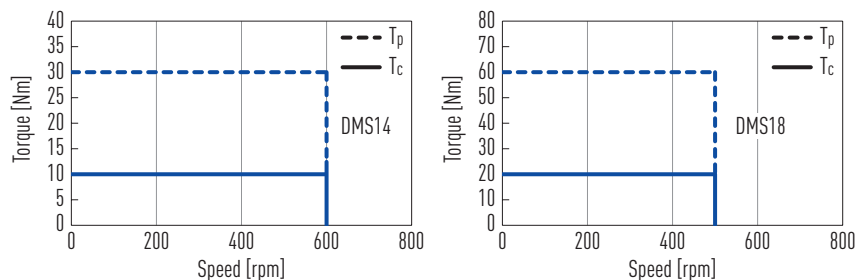


Table 3.2 Technical data for DMS1 HIWIN rotary tables

	Symbol	Unit	DMS14	DMS18
Technical data of rotary table				
Peak torque (for 1 sec.)	T _p	Nm	30	60
Continuous torque	T _c	Nm	10	20
Stall torque	T _s	Nm	7	14
Inertia of rotating parts	J	kgm ²	0.0065	0.0075
Weight	M _m	kg	7.0	9.5
Max. axial load	F _a	N	3,700	
Max. radial load	F _r	N	1,700	
Max. moment of tilt	M _k	Nm	60	
Nominal speed (at 400 VAC, 30 % duty cycle)	n	1/min	600	500
Position accuracy		arcsec	± 45/± 10 ²⁾	
Repeatability		arcsec	± 3	
Radial run-out		mm	0.03	
Axial run-out		mm	0.03	
Height	H	mm	120	160
Protection class			IP40	
Technical data of motor				
Peak current (for 1 sec.)	I _p	A _{eff}	12	
Continuous current	I _c	A _{eff}	4	
Motor constant	K _m	Nm/√W	1.0	1.6
Resistance ¹⁾	R ₂₅	Ω	3.9	6.5
Inductance ¹⁾	L	mH	14.0	26.0
Electrical time constant	T _e	ms	3.6	4.0
Torque constant	K _t	Nm/A _{eff}	2.50	5.00
Back emf constant	K _u	V _{eff} /(rad/s)	1.2	2.4
Number of poles	2p		22	
Thermal resistance	R _{th}	°C/W	0.80	0.48
Thermal time constant	T _{th}	s	2,290	2,520
Thermal sensor			PTC SNM 100	
Max. DC Bus		V	600	

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

¹⁾ Line-to-line


²⁾ With error mapping

Encoder type A specifications (optical, incremental)

- 3,600 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Dimensions of the DMS1 HIWIN rotary table

(For values, see [Table 3.2](#))

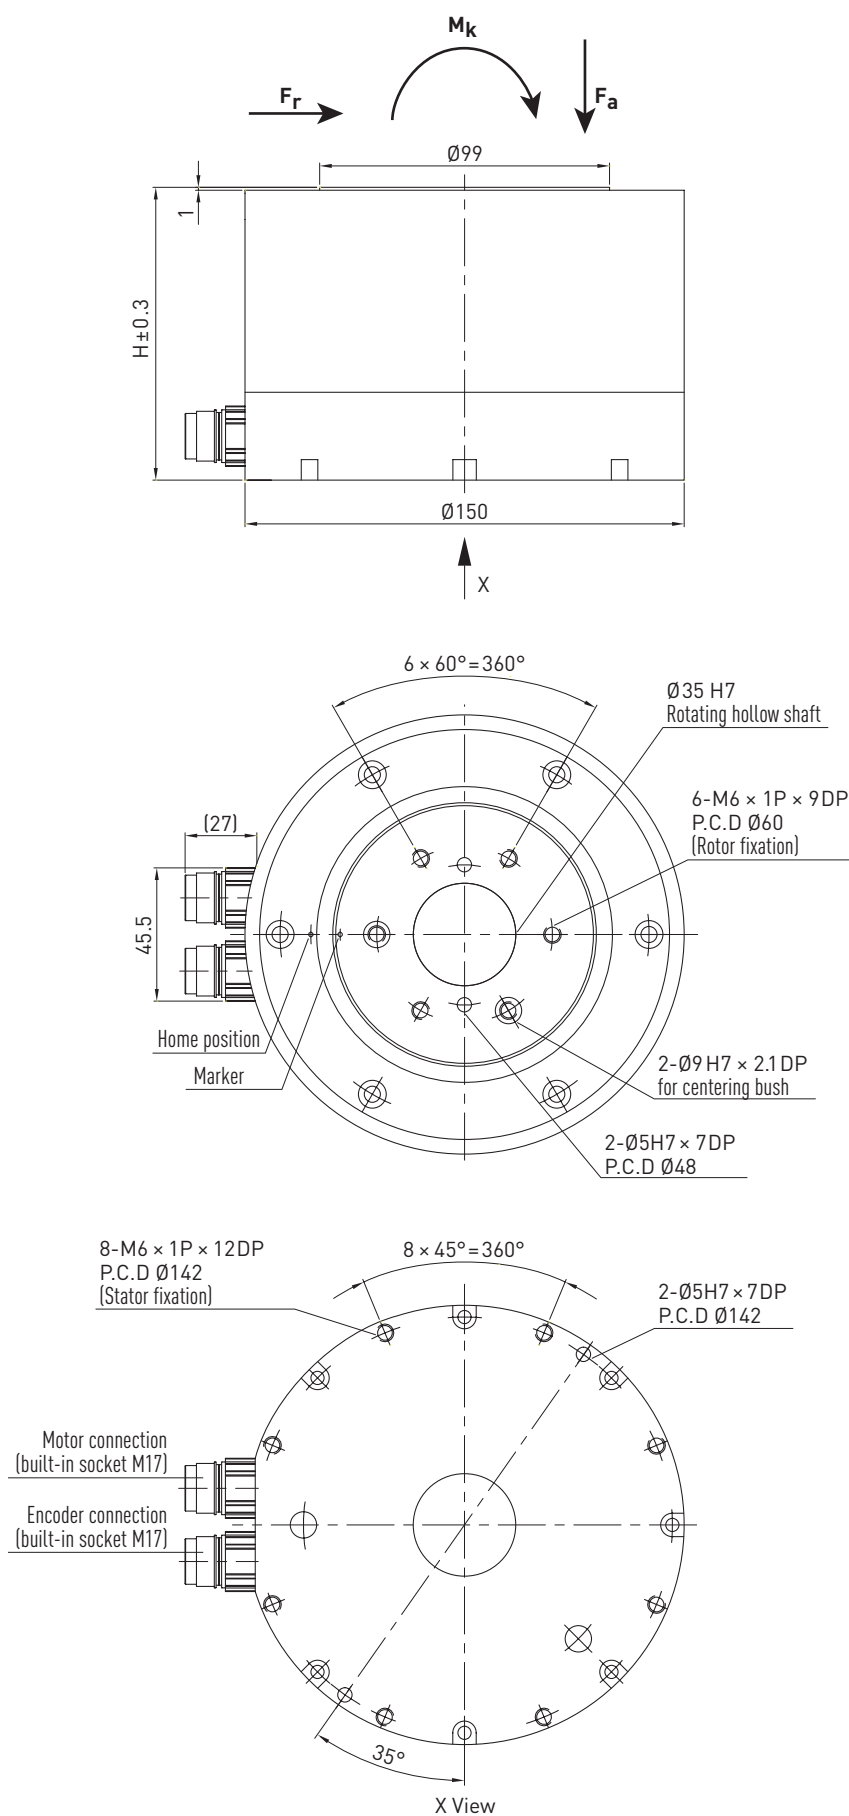

Rotary Tables

HIWIN rotary tables DMS

3.3.3 Technical data for DMS3

Torque-speed curves (DC bus voltage: 560 VDC)

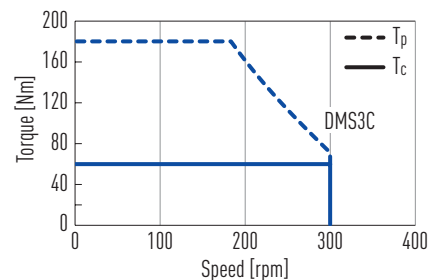
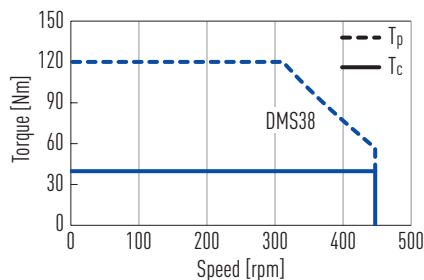
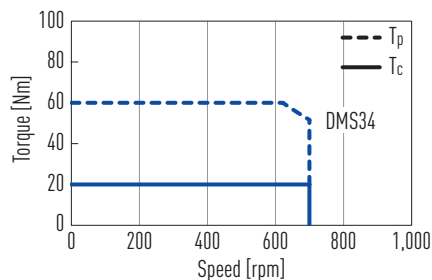


Table 3.3 Technical data for HIWIN rotary tables DMS3

	Symbol	Unit	DMS34	DMS38	DMS3C
Technical data of rotary table					
Peak torque (for 1 sec.)	T _p	Nm	60	120	180
Continuous torque	T _c	Nm	20	40	60
Stall torque	T _s	Nm	14	28	42
Inertia of rotating parts	J	kgm ²	0.020	0.026	0.035
Weight	M _m	kg	21	26	32
Max. axial load	F _a	N	8,000		
Max. radial load	F _r	N	6,500		
Max. moment of tilt	M _k	Nm	240		
Nominal speed (at 400 VAC, 30 % duty cycle)	n	1/min	700	450	300
Position accuracy		arcsec	± 25/± 10 ²⁾		
Repeatability		arcsec	± 2.5		
Radial run-out		mm	0.05		
Axial run-out		mm	0.05		
Height	H	mm	150	190	230
Protection class			IP40		
Technical data of motor					
Peak current (for 1 sec.)	I _p	A _{eff}	10.2		
Continuous current	I _c	A _{eff}	3.4		
Motor constant	K _m	Nm/√W	1.8	2.8	3.6
Resistance ¹⁾	R ₂₅	Ω	7.5	12.0	17.1
Inductance ¹⁾	L	mH	34.6	53.6	84.4
Electrical time constant	T _e	ms	4.6	4.5	4.9
Torque constant	K _t	Nm/A _{eff}	6	12	18
Back emf constant	K _u	V _{eff} /(rad/s)	3	6	9
Number of poles	2p		22		
Thermal resistance	R _{th}	°C/W	0.73	0.46	0.32
Thermal time constant	T _{th}	s	2,020	2,130	2,170
Thermal sensor			PTC SNM 120		
Max. DC Bus		V	600		

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

¹⁾ Line-to-line


²⁾ With error mapping

Encoder type A specifications (optical, incremental)

- 3,600 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Dimensions of the DMS3 HIWIN rotary table

(For values, see Table 3.3)

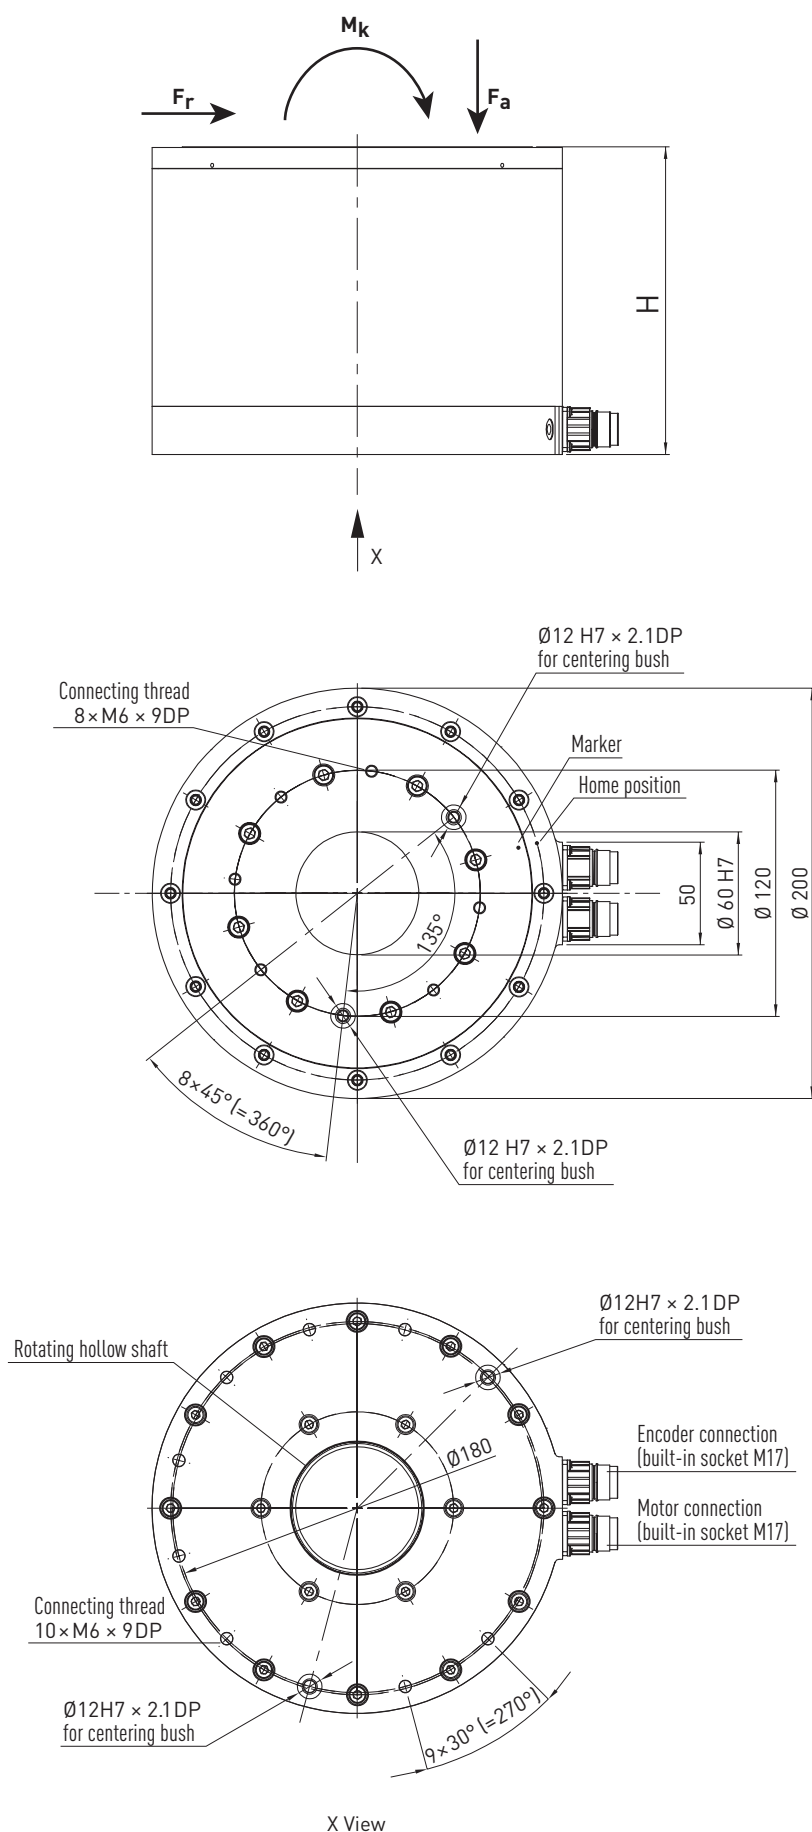

Rotary Tables

HIWIN rotary tables DMS

3.3.4 Technical data for DMS7

Torque-speed curves (DC bus voltage: 560 VDC)

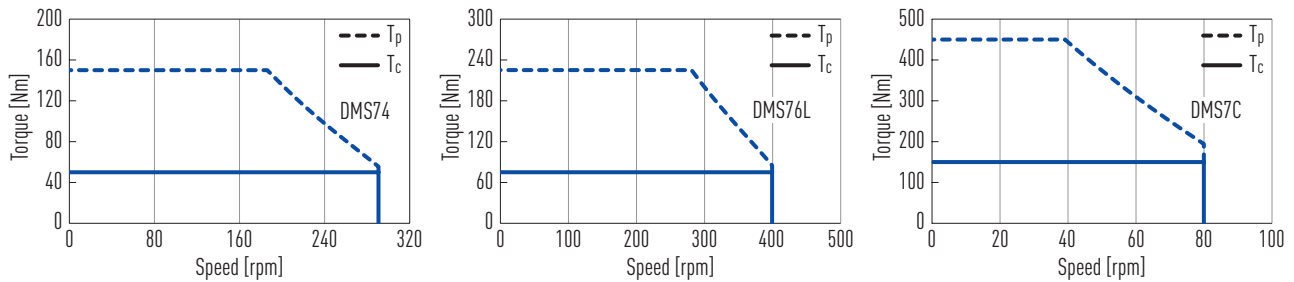


Table 3.4 Technical data for DMS7 HIWIN rotary tables

	Symbol	Unit	DMS74	DMS76L	DMS7C
Technical data of rotary table					
Peak torque (for 1 sec.)	T _p	Nm	150	225	450
Continuous torque	T _c	Nm	50	75	150
Stall torque	T _s	Nm	35.0	52.5	105.0
Inertia of rotating parts	J	kgm ²	0.152	0.174	0.241
Weight	M _m	kg	39.0	44.5	61.5
Max. axial load	F _a	N	8,000		
Max. radial load	F _r	N	6,500		
Max. moment of tilt	M _k	Nm	360		
Nominal speed (at 400 VAC, 30 % duty cycle)	n	1/min	290	400	80
Position accuracy		arcsec	± 25/± 10 ²⁾		
Repeatability		arcsec	± 2.5		
Radial run-out		mm	0.05		
Axial run-out		mm	0.05		
Height	H	mm	160	180	240
Protection class			IP40		
Technical data of motor					
Peak current (for 1 sec.)	I _p	A _{eff}	10.2	20.4	10.2
Continuous current	I _c	A _{eff}	3.4	6.8	3.4
Motor constant	K _m	Nm/√W	3.9	5.0	7.7
Resistance ¹⁾	R ₂₅	Ω	12.9	4.3	29.0
Inductance ¹⁾	L	mH	55	19	145
Electrical time constant	T _e	ms	4.3	4.4	5.0
Torque constant	K _t	Nm/A _{eff}	17.0	12.8	51.1
Back emf constant	K _u	V _{eff} /rad/s	9.8	7.4	29.5
Number of poles	2p		44		
Thermal resistance	R _{th}	°C/W	0.42	0.32	0.19
Thermal time constant	T _{th}	s	2,230	2,330	2,350
Thermal sensor			PTC SNM 120		
Max. DC Bus		V	600		

All the specifications in the table (except dimensions) are in $\pm 10\%$ of tolerance at 25 $^{\circ}C$ ambient temperature

¹⁾ Line-to-line


²⁾ With error mapping

Encoder type D specifications (optical, incremental)

- 11,152 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Dimensions of the DMS7 HIWIN rotary table

(For values, see Table 3.4)

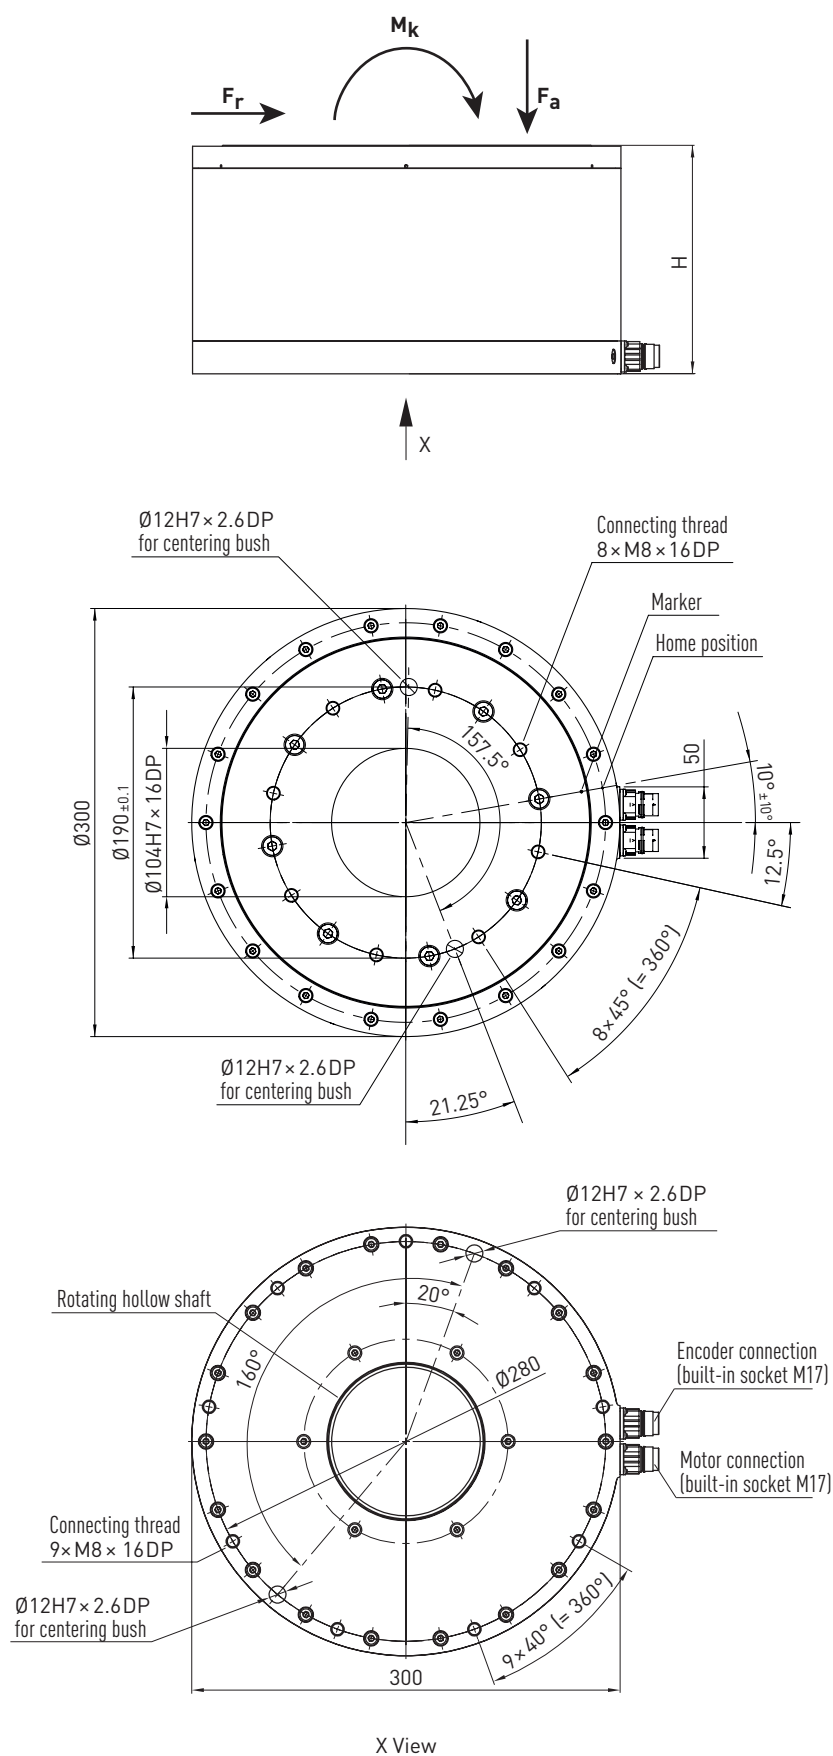

HIWIN rotary tables DMN

4.1 Characteristics of the DMN rotary tables

Key features:

- Typical applications:**

-

DM	N	7	1	E
----	---	---	---	---

Type:

Outer diameter [mm]:

– Rotor height [mm]:

```
1: 10
2: 20
3: 30
```

4.3 Technical data for DMN

4.3.1 Technical data for DMN42

Torque-speed curve (DC bus voltage: 320/560 VDC)

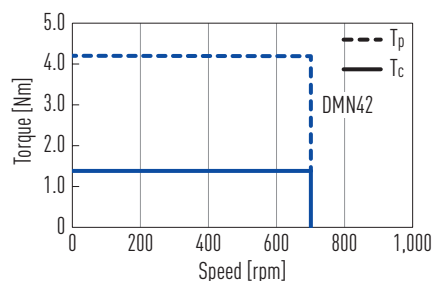


Table 4.1 Technical data for DMN42 HIWIN rotary tables

	Symbol	Unit	DMN42
Technical data of rotary table			
Peak torque (for 1 sec.)	T_p	Nm	4.2
Continuous torque	T_c	Nm	1.4
Stall torque	T_s	Nm	0.98
Inertia of rotating parts	J	kgm ²	0.003
Weight	M_m	kg	2
Max. axial load	F_a	N	600
Max. radial load	F_r	N	600
Max. moment of tilt	M_k	Nm	30
Nominal speed (at 400 VAC)	n	1/min	700
Position accuracy		arcsec	± 45
Repeatability		arcsec	± 2.5
Radial run-out		mm	0.03
Axial run-out		mm	0.03
Height	H	mm	45
Protection class			IP40
Technical data of motor			
Peak current (for 1 sec.)	I_p	A_{eff}	4.5
Continuous current	I_c	A_{eff}	1.5
Motor constant	K_m	Nm/√W	0.4
Resistance ¹⁾	R_{25}	Ω	4.59
Inductance ¹⁾	L	mH	8.18
Electrical time constant	T_e	ms	1.80
Torque constant	K_t	Nm/A _{eff}	0.97
Back emf constant	K_u	V _{eff} /(rad/s)	0.56
Number of poles	$2p$		16
Thermal resistance	R_{th}	°C/W	4.84
Thermal time constant	T_{th}	s	1,170
Thermal sensor			PTC SNM 100
Max. DC Bus		V	600

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

¹⁾ Line-to-line

Encoder specifications (optical, incremental)


- 2,048 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Rotary Tables

HIWIN rotary tables DMN

Dimensions of the DMN42 HIWIN rotary table

(For values, see [Table 4.1](#))

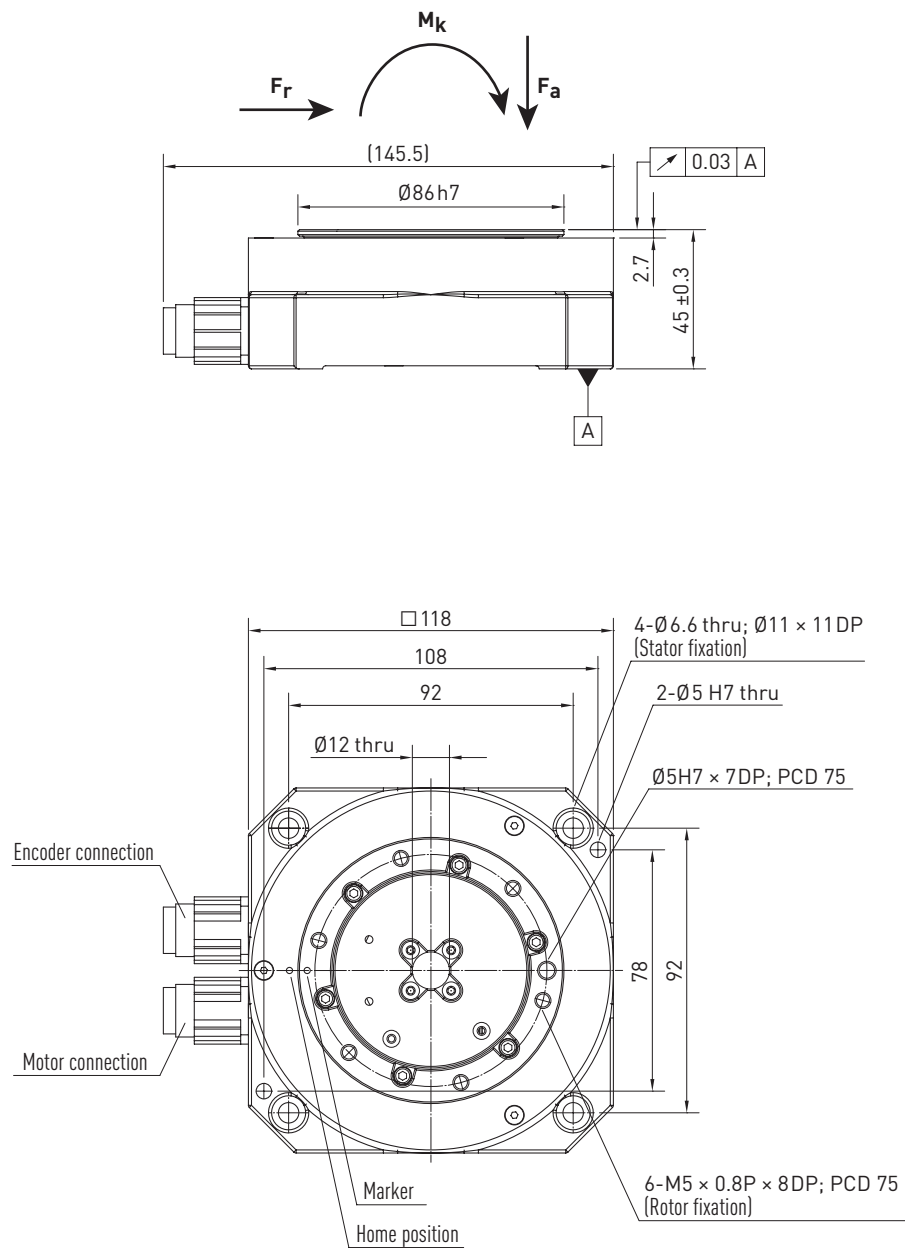

4.3.2 Technical data for DMN71

Torque-speed curve (DC bus voltage: 320/560 VDC)

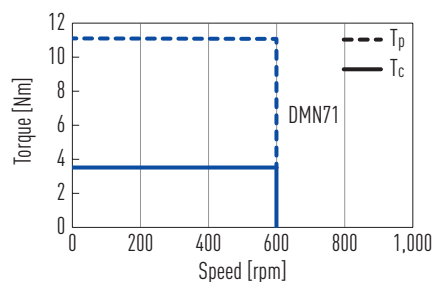


Table 4.2 Technical data for DMN71 HIWIN rotary tables

	Symbol	Unit	DMN71
Technical data of rotary table			
Peak torque (for 1 sec.)	T_p	Nm	11.1
Continuous torque	T_c	Nm	3.7
Stall torque	T_s	Nm	2.59
Inertia of rotating parts	J	kgm ²	0.008
Weight	M_m	kg	3.5
Max. axial load	F_a	N	1,000
Max. radial load	F_r	N	1,000
Max. moment of tilt	M_k	Nm	50
Nominal speed (at 400 VAC)	n	1/min	600
Position accuracy		arcsec	± 45
Repeatability		arcsec	± 2.5
Radial run-out		mm	0.03
Axial run-out		mm	0.03
Height	H	mm	50
Protection class			IP40
Technical data of motor			
Peak current (for 1 sec.)	I_p	A_{eff}	10.2
Continuous current	I_c	A_{eff}	3.4
Motor constant	K_m	Nm/√W	0.6
Resistance ¹⁾	R_{25}	Ω	2.55
Inductance ¹⁾	L	mH	9.02
Electrical time constant	T_e	ms	3.5
Torque constant	K_t	Nm/A _{eff}	1.09
Back emf constant	K_u	V _{eff} /rad/s	0.63
Number of poles	$2p$		16
Thermal resistance	R_{th}	°C/W	1.7
Thermal time constant	T_{th}	s	1,420
Thermal sensor			PTC SNM 100
Max. DC Bus		V	600

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

¹⁾ Line-to-line

Encoder specifications (optical, incremental)


- 2,048 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Rotary Tables

HIWIN rotary tables DMN

Dimensions of the DMN71 HIWIN rotary table

(For values, see [Table 4.2](#))

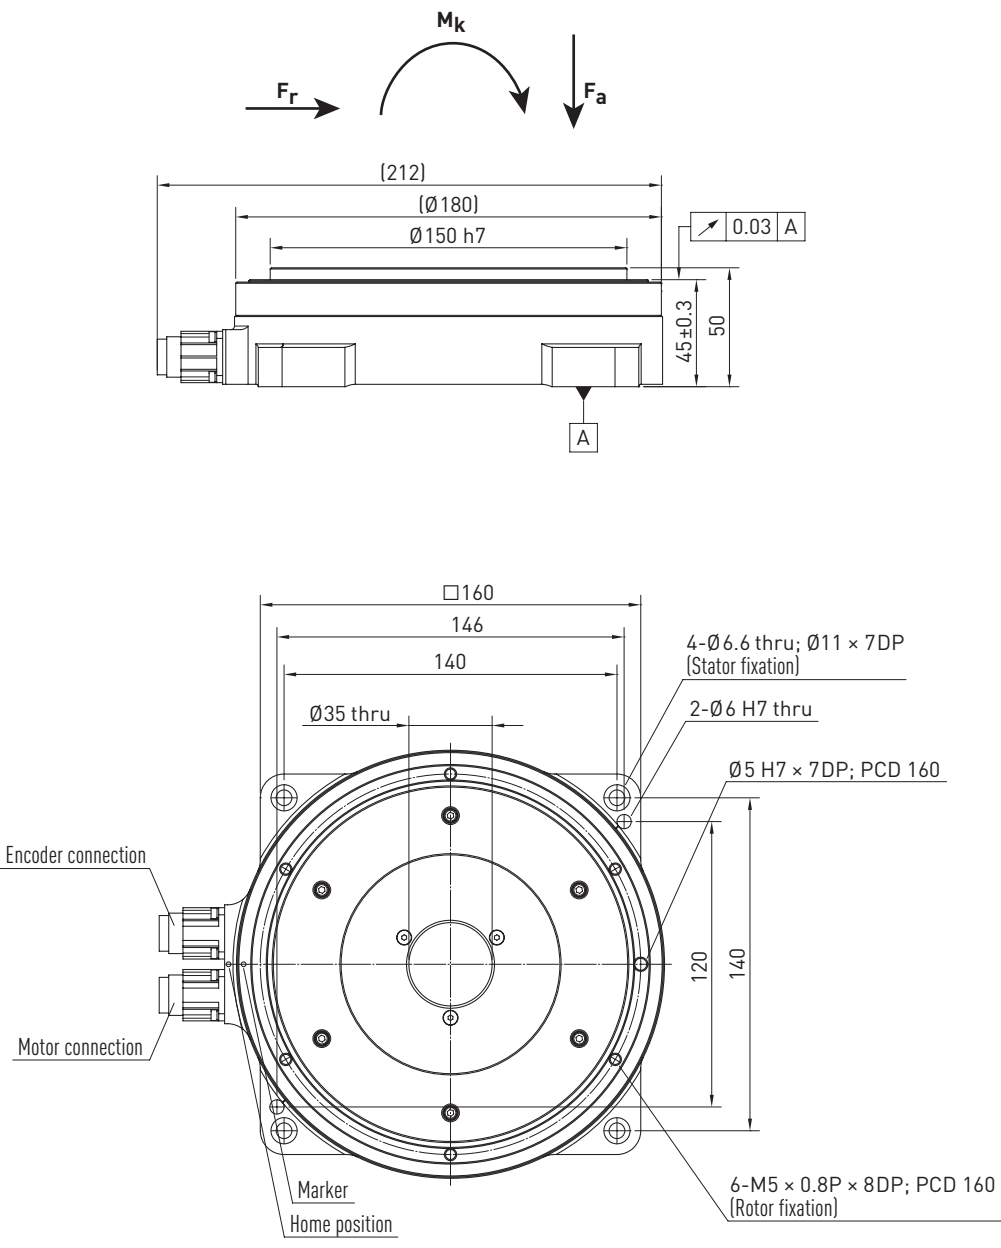

4.3.3 Technical data for DMN93

Torque-speed curve (DC bus voltage: 320/560 VDC)

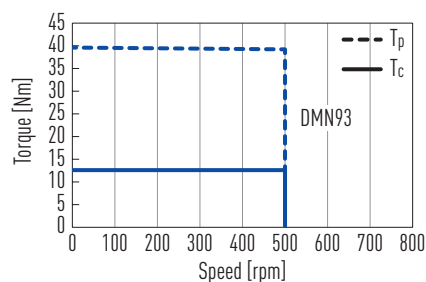


Table 4.3 Technical data for DMN93 HIWIN rotary tables

	Symbol	Unit	DMN93
Technical data of rotary table			
Peak torque (for 1 sec.)	T_p	Nm	39.6
Continuous torque	T_c	Nm	13.2
Stall torque	T_s	Nm	9.24
Inertia of rotating parts	J	kgm ²	0.012
Weight	M_m	kg	7.5
Max. axial load	F_a	N	1,000
Max. radial load	F_r	N	1,000
Max. moment of tilt	M_k	Nm	50
Nominal speed (at 400 VAC)	n	1/min	500
Position accuracy		arcsec	± 45
Repeatability		arcsec	± 2.5
Radial run-out		mm	0.03
Axial run-out		mm	0.03
Height	H	mm	55
Protection class			IP40
Technical data of motor			
Peak current (for 1 sec.)	I_p	A_{eff}	10.2
Continuous current	I_c	A_{eff}	3.4
Motor constant	K_m	Nm/√W	1.5
Resistance ¹⁾	R_{25}	Ω	4.3
Inductance ¹⁾	L	mH	23.2
Electrical time constant	T_e	ms	5.4
Torque constant	K_t	Nm/A _{eff}	3.9
Back emf constant	K_u	V _{eff} /rad/s	2.25
Number of poles	$2p$		22
Thermal resistance	R_{th}	°C/W	1.01
Thermal time constant	T_{th}	s	1,700
Thermal sensor			PTC SNM 100
Max. DC Bus		V	600

All the specifications in the table (except dimensions) are in ± 10 % of tolerance at 25 °C ambient temperature

¹⁾ Line-to-line

Encoder specifications (optical, incremental)


- 3,600 lines/cycle
- Index mark
- Signal output sin/cos 1 V_{pp}

Rotary Tables

HIWIN rotary tables DMN

Dimensions of the DMN93 HIWIN rotary table

(For values, see [Table 4.3](#))

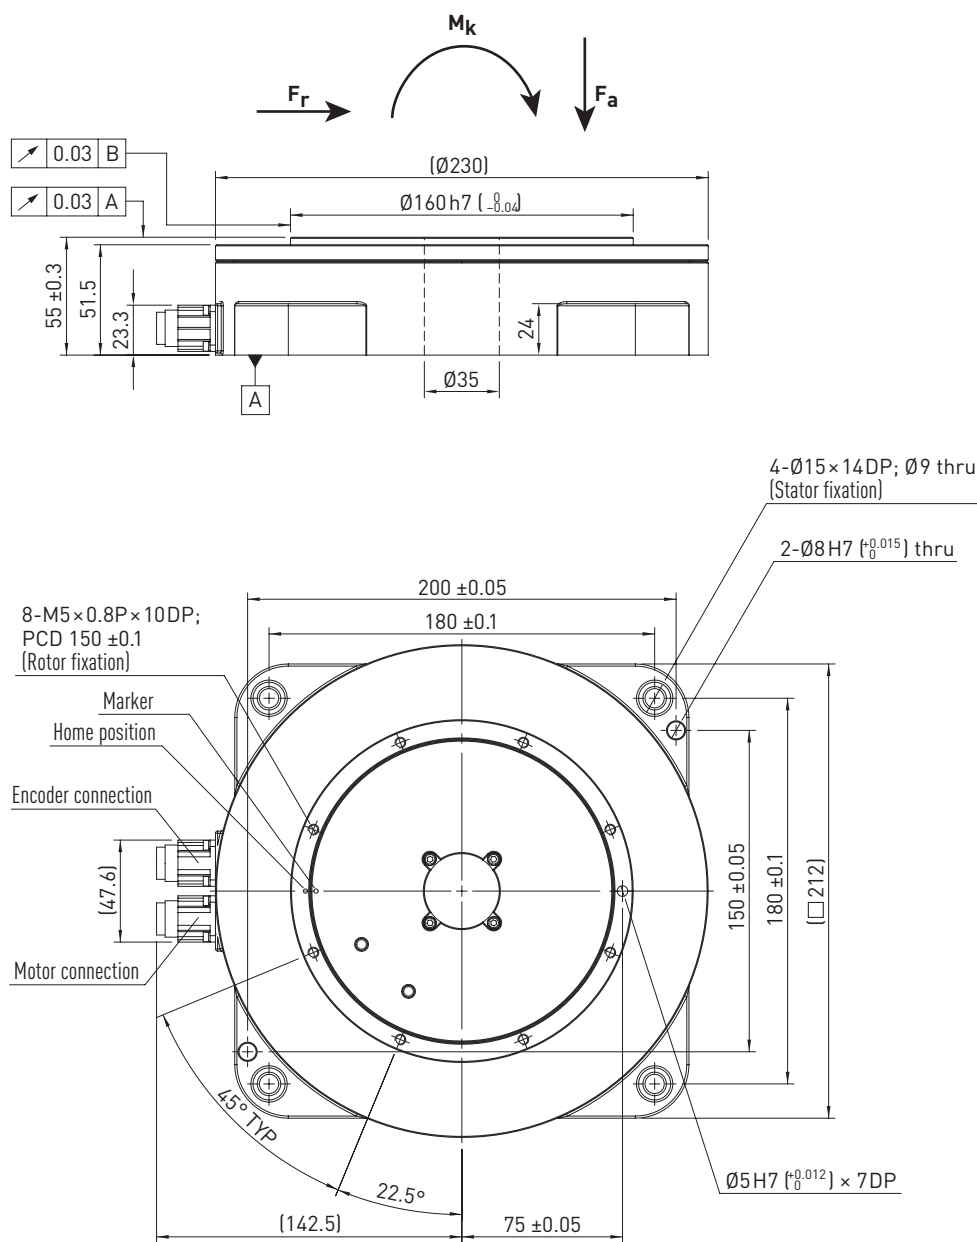


[illegible]

Rotary Tables

Notes

[illegible]


We live motion.



Linear Guideways



Ballscrews

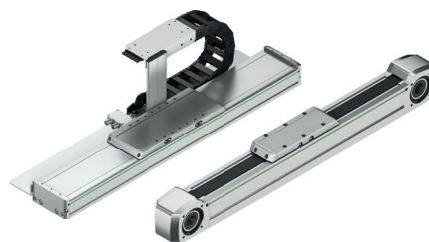

Linear Axes



Linear Axis Systems



Torque Motors



Robots



Linear Motor Components



Rotary Tables



Drives & Servo Motors

Germany

HIWIN GmbH
Brücklesbünd 1
D-77654 Offenburg
Phone +49 (0) 7 81 9 32 78 - 0
Fax +49 (0) 7 81 9 32 78 - 90
info@hiwin.de
www.hiwin.de

Taiwan

Headquarters
HIWIN Technologies Corp.
No. 7, Jingke Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2359-4510
Fax +886-4-2359-4420
business@hiwin.tw
www.hiwin.tw

Taiwan

Headquarters
HIWIN Mikrosystem Corp.
No. 6, Jingke Central Road
Taichung Precision Machinery Park
Taichung 40852, Taiwan
Phone +886-4-2355-0110
Fax +886-4-2355-0123
business@hiwinmikro.tw
www.hiwinmikro.tw

France

HIWIN GmbH
4, Impasse Joffre
F-67202 Wolfisheim
Phone +33 (0) 3 88 28 84 80
info@hiwin.fr
www.hiwin.fr

Italy

HIWIN Srl
Via Pitagora 4
I-20861 Brugherio (MB)
Phone +39 039 287 61 68
Fax +39 039 287 43 73
info@hiwin.it
www.hiwin.it

Poland

HIWIN GmbH
ul. Puławska 405a
PL-02-801 Warszawa
Phone +48 22 544 07 07
Fax +48 22 544 07 08
info@hiwin.pl
www.hiwin.pl

Switzerland

HIWIN Schweiz GmbH
Eichwiesstrasse 20
CH-8645 Jona
Phone +41 (0) 55 225 00 25
Fax +41 (0) 55 225 00 20
info@hiwin.ch
www.hiwin.ch

Slovakia

HIWIN s.r.o., o.z.z.o.
Mládežnícka 2101
SK-01701 Považská Bystrica
Phone +421 424 43 47 77
Fax +421 424 26 23 06
info@hiwin.sk
www.hiwin.sk

Czech Republic

HIWIN s.r.o.
Medkova 888/11
CZ-62700 Brno
Phone +42 05 48 528 238
Fax +42 05 48 220 223
info@hiwin.cz
www.hiwin.cz

Austria

HIWIN GmbH
info@hiwin.at
www.hiwin.at

Netherlands

HIWIN GmbH
info@hiwin.nl
www.hiwin.nl

Romania

HIWIN GmbH
info@hiwin.ro
www.hiwin.ro

Slovenia

HIWIN GmbH
info@hiwin.si
www.hiwin.si

Hungary

HIWIN GmbH
info@hiwin.hu
www.hiwin.hu

China

HIWIN Corp.
www.hiwin.cn

Japan

HIWIN Corp.
mail@hiwin.co.jp
www.hiwin.co.jp

USA

HIWIN Corp.
info@hiwin.com
www.hiwin.com

Korea

HIWIN Corp.
www.hiwin.kr

Singapore

HIWIN Corp.
www.hiwin.sg