



MBCS20





Fig→Fixed+Fixed

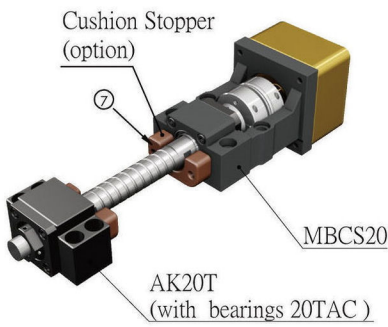

Fig→Fixed+Supported

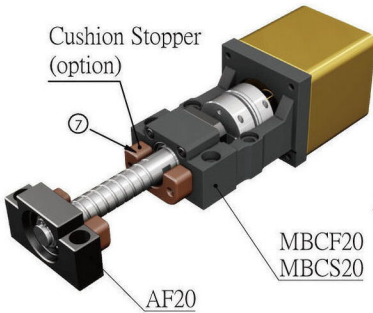

No.	Part name	Qty
1	Housing	1
2	Bearing MBCS20 with bearings 20TAC	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

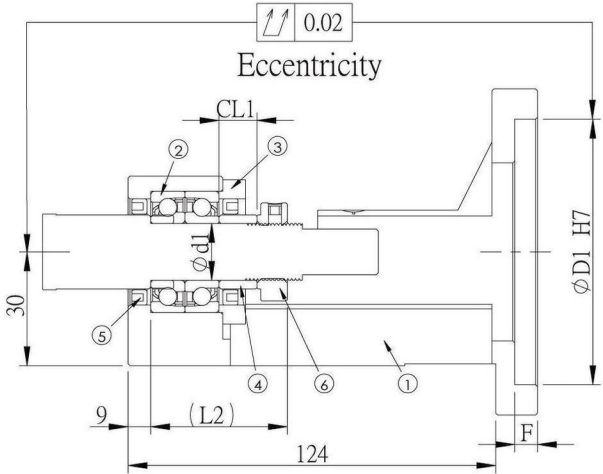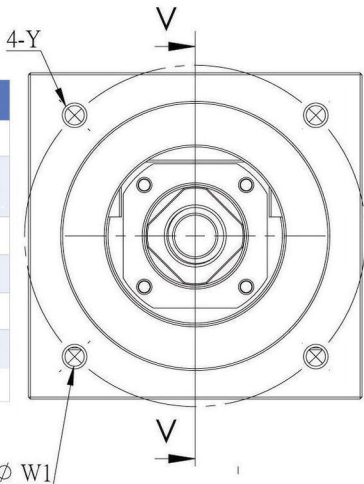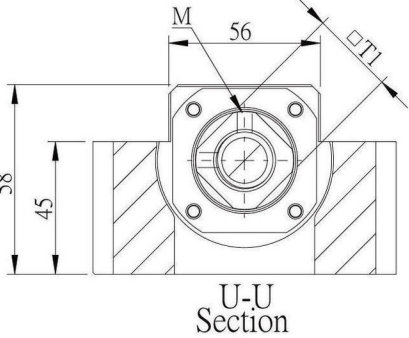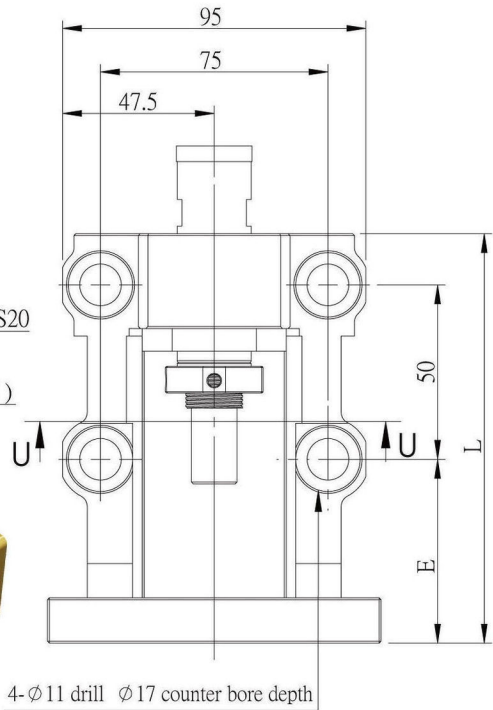

Unit : mm

Model No.	D1	W1	Y	L	Shaft diameter d1	CL1	L2	E	F	M	T1	Weight (Kgs)	Support unit Supported-side	Suggest Coupling
MBCS20-X	80	100	M6	140	20	9	57	70	8	4-M6	Ø 40	-	AK20T AF20 EF20	SGS 50C
MBCS20-Y	95	115	M8	141				71				2.81		SGS 50C
MBCS20-YP			M6	141				71				2.85		SGS 57C
MBCS20-S	110	130	M8	151				81				3.69		SGS 57C
MBCS20-G		145		153				83	10			3.92		

Note :

- 1.Bearings made preload , and axial clearance is 0 mm.
- 2.DF type, P4 grade preloaded duplex angular contact ball bearing suitable for ballscrew use.