


# MBCS25-30

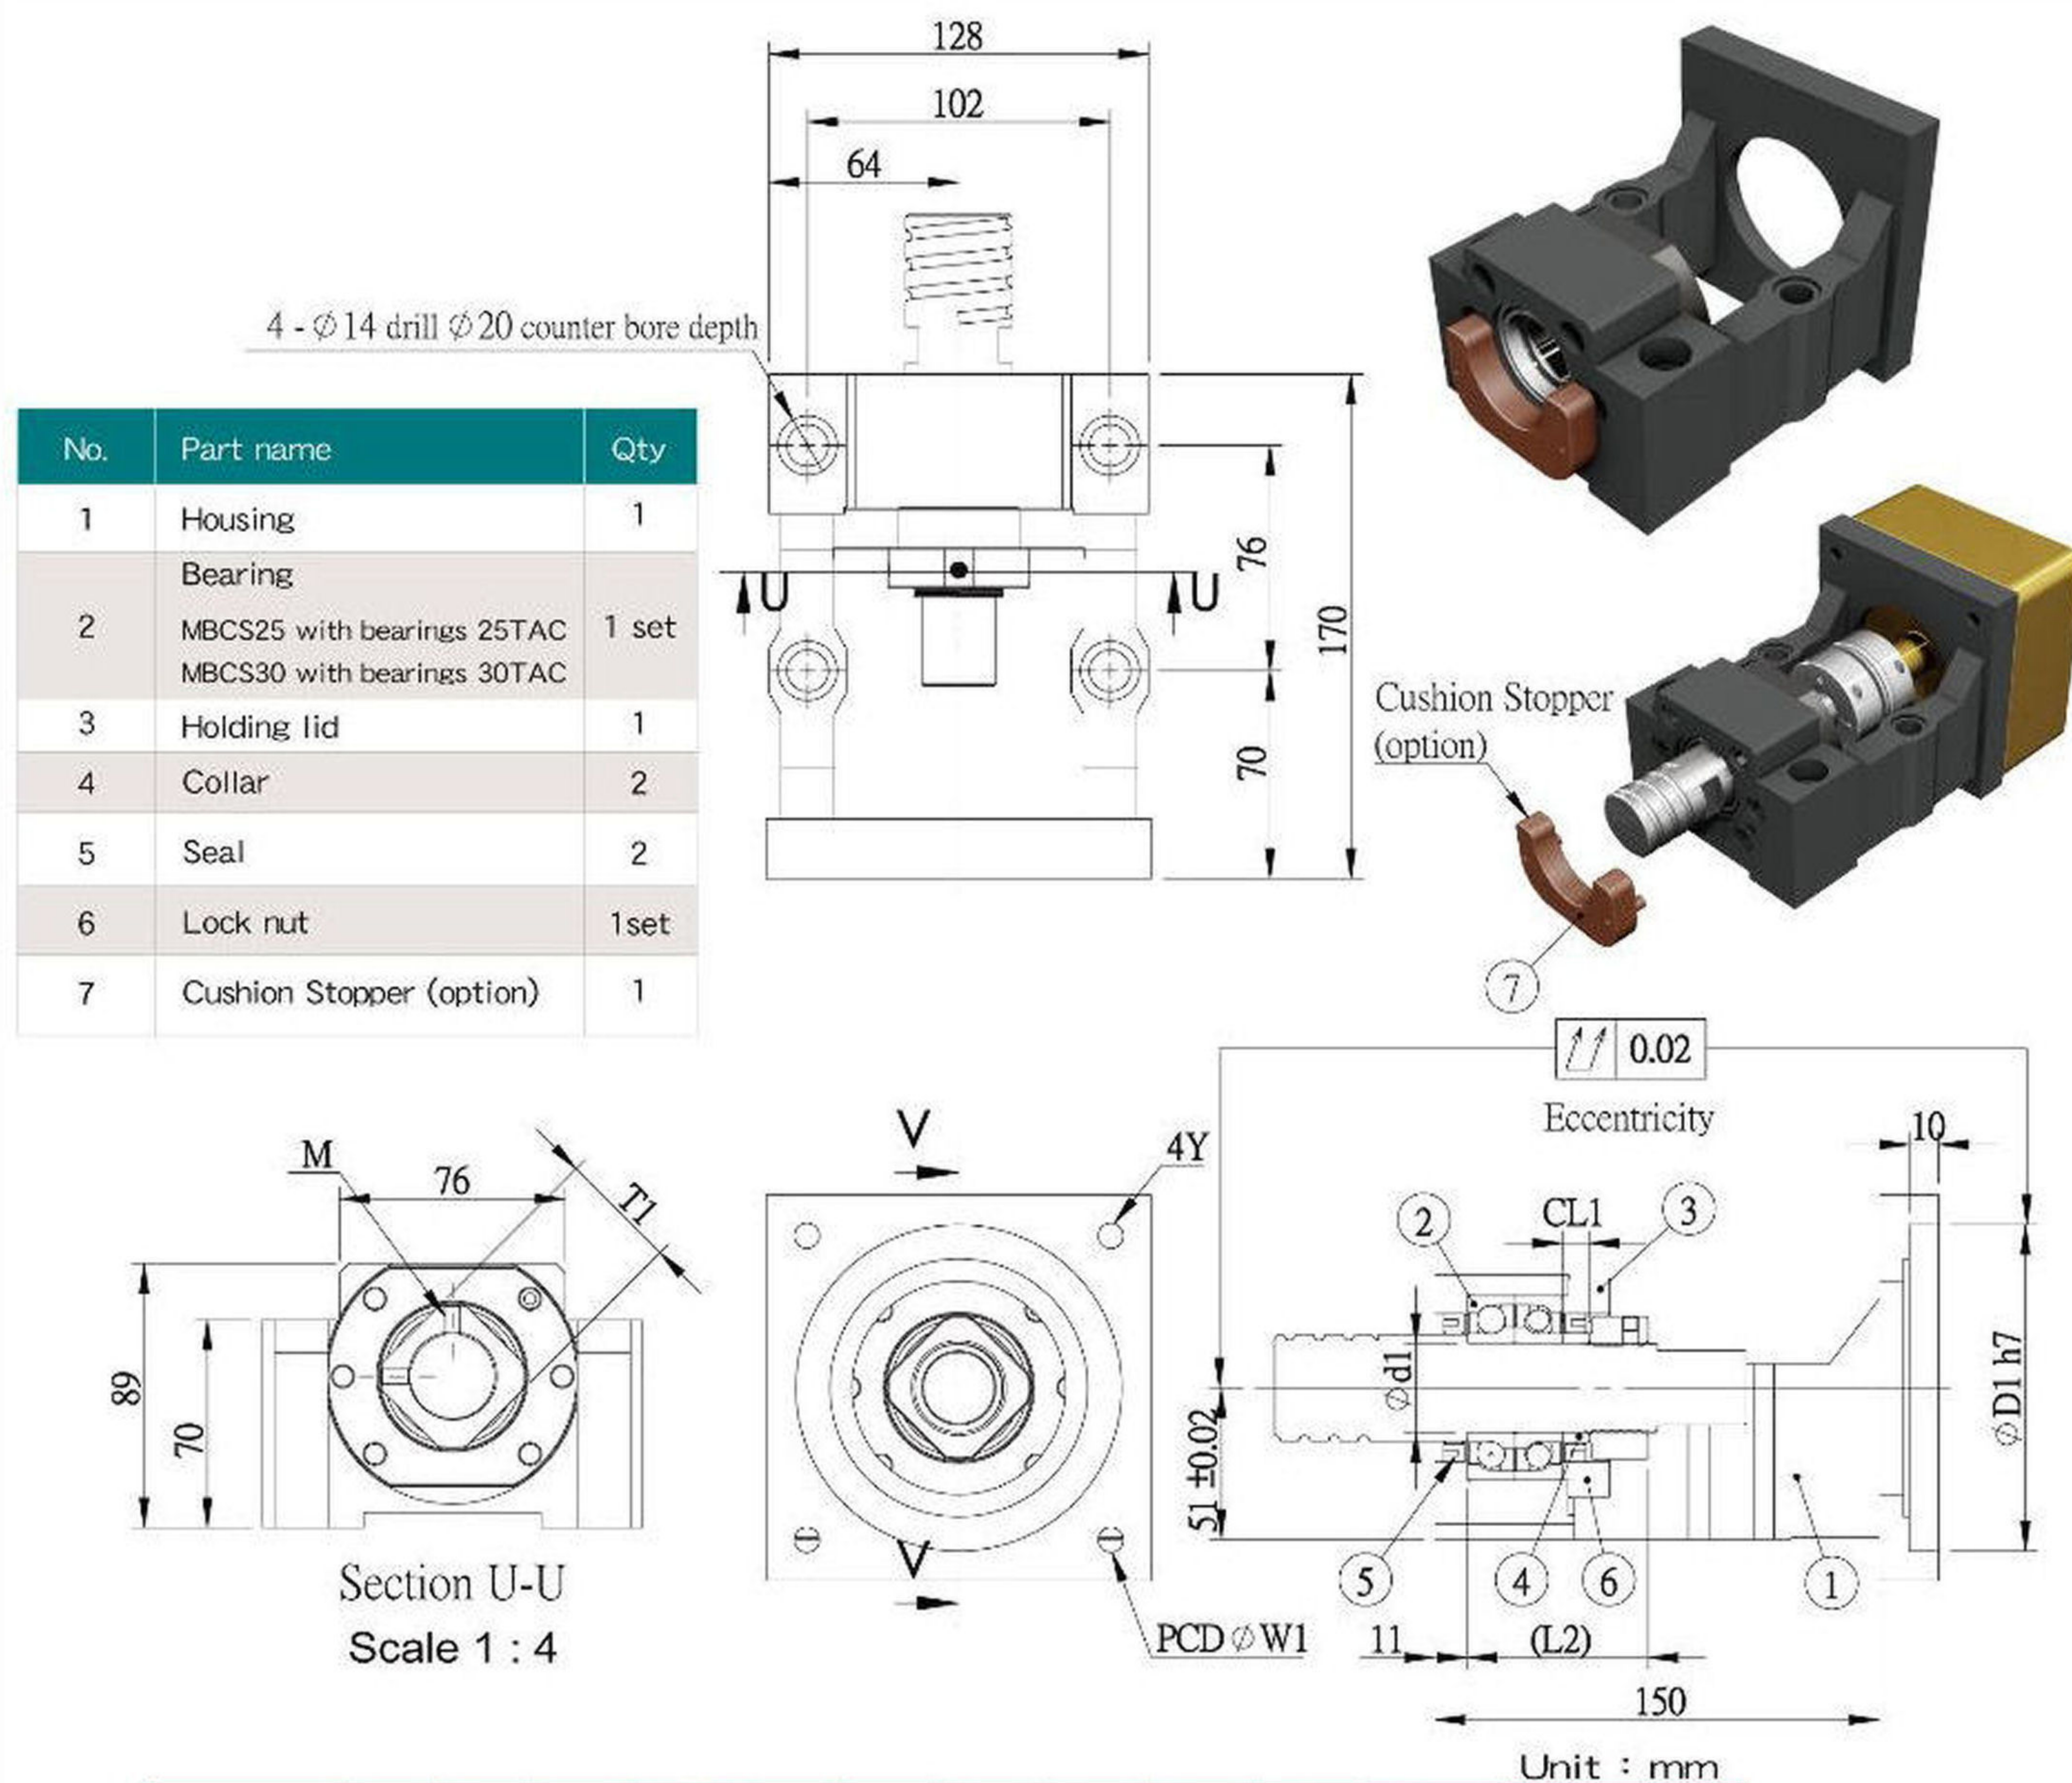

Unit : mm

Model No.	D1	W1	Y	Shaft diameter d1	CL1	L2	M	T1	Weight (Kgs)	Support unit Supported-side	Suggest Coupling
MBCS25-Y	95	115	M8	25	15	65	4-M6	ϕ 45	-	SBK25/SF25	SGL 65C
MBCS25-YP			M6						-		
MBCS25-S	110	130	M8						-		SGS 65C
MBCS25-G		145							-		
MBCS30-Y	95	115	M8	30	15	65	4-M6	ϕ 50	-	SBK30 BK30/BF30	SGL 65C
MBCS30-YP			M6						-		
MBCS30-S	110	130	M8						-		SGS 65C
MBCS30-G		145							-		

Note :

1.Bearings made preload , and axial clearance is 0 mm.

2.DF type,suitable for ballscrew use.