



# MBCA15

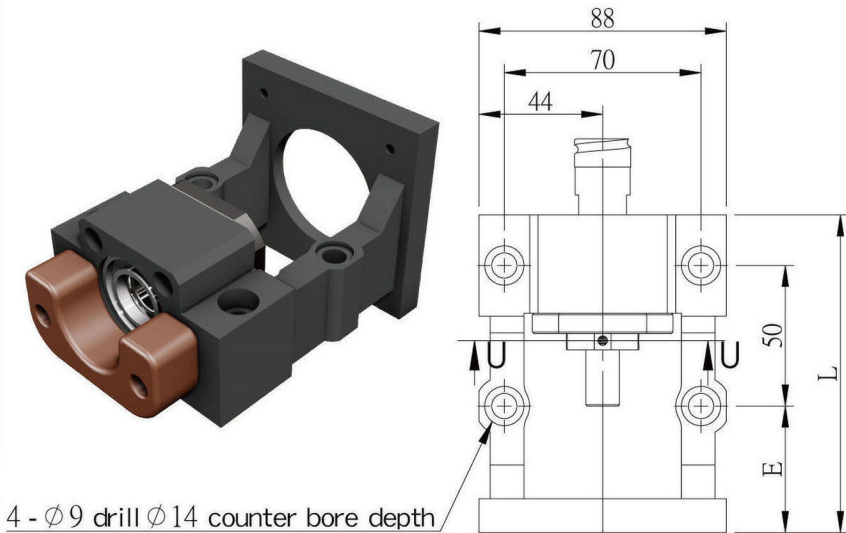



No.	Part name	Qty
1	Housing	1
2	Bearing MBCA15 (7302A)	1 set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

Heavy load


4 -  $\phi 9$  drill  $\phi 14$  counter bore depth

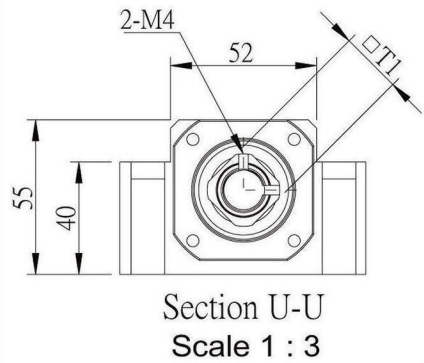

Section U-U  
Scale 1 : 3

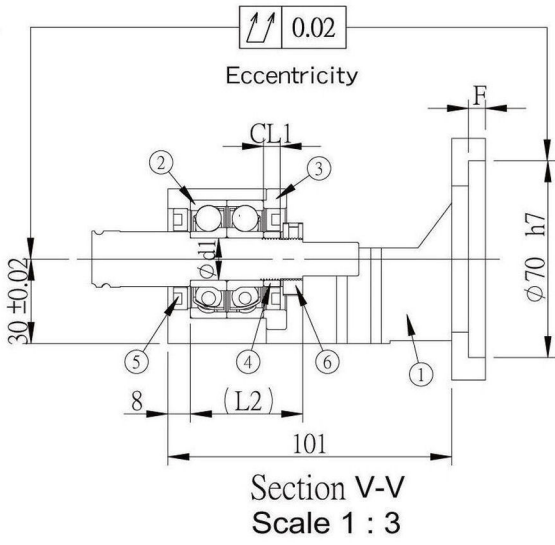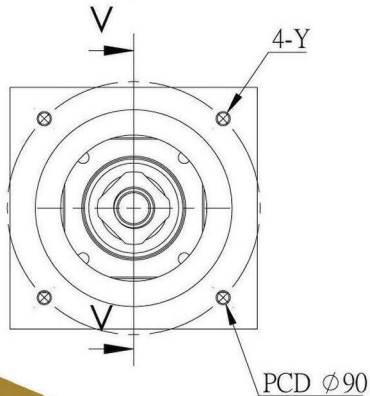

Section V-V  
Scale 1 : 3

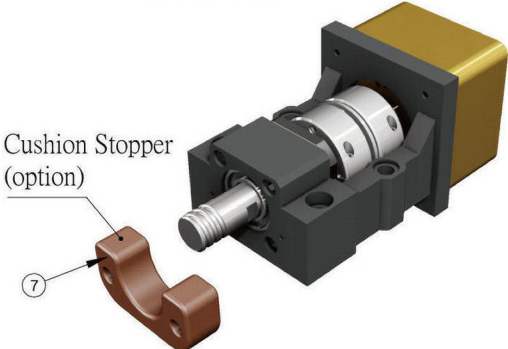

Unit : mm

Model No.	Y	L	Shaft diameter d1	CL1	L2	E	F	T1	Weight (Kgs)	Support unit / Supported-side	Suggest Coupling
MBCA15-E	M6	115	15	6	40	47	8	22	-	AK15 / AF15	SGB 50C
MBCA15-EP	M5	113				45	6		-		

Note :

- 1.Bearings made preload , and axial clearance is 0 mm.
- 2.DF type, P5 grade preloaded duplex angular contact ball bearing suitable for ballscrew use.