

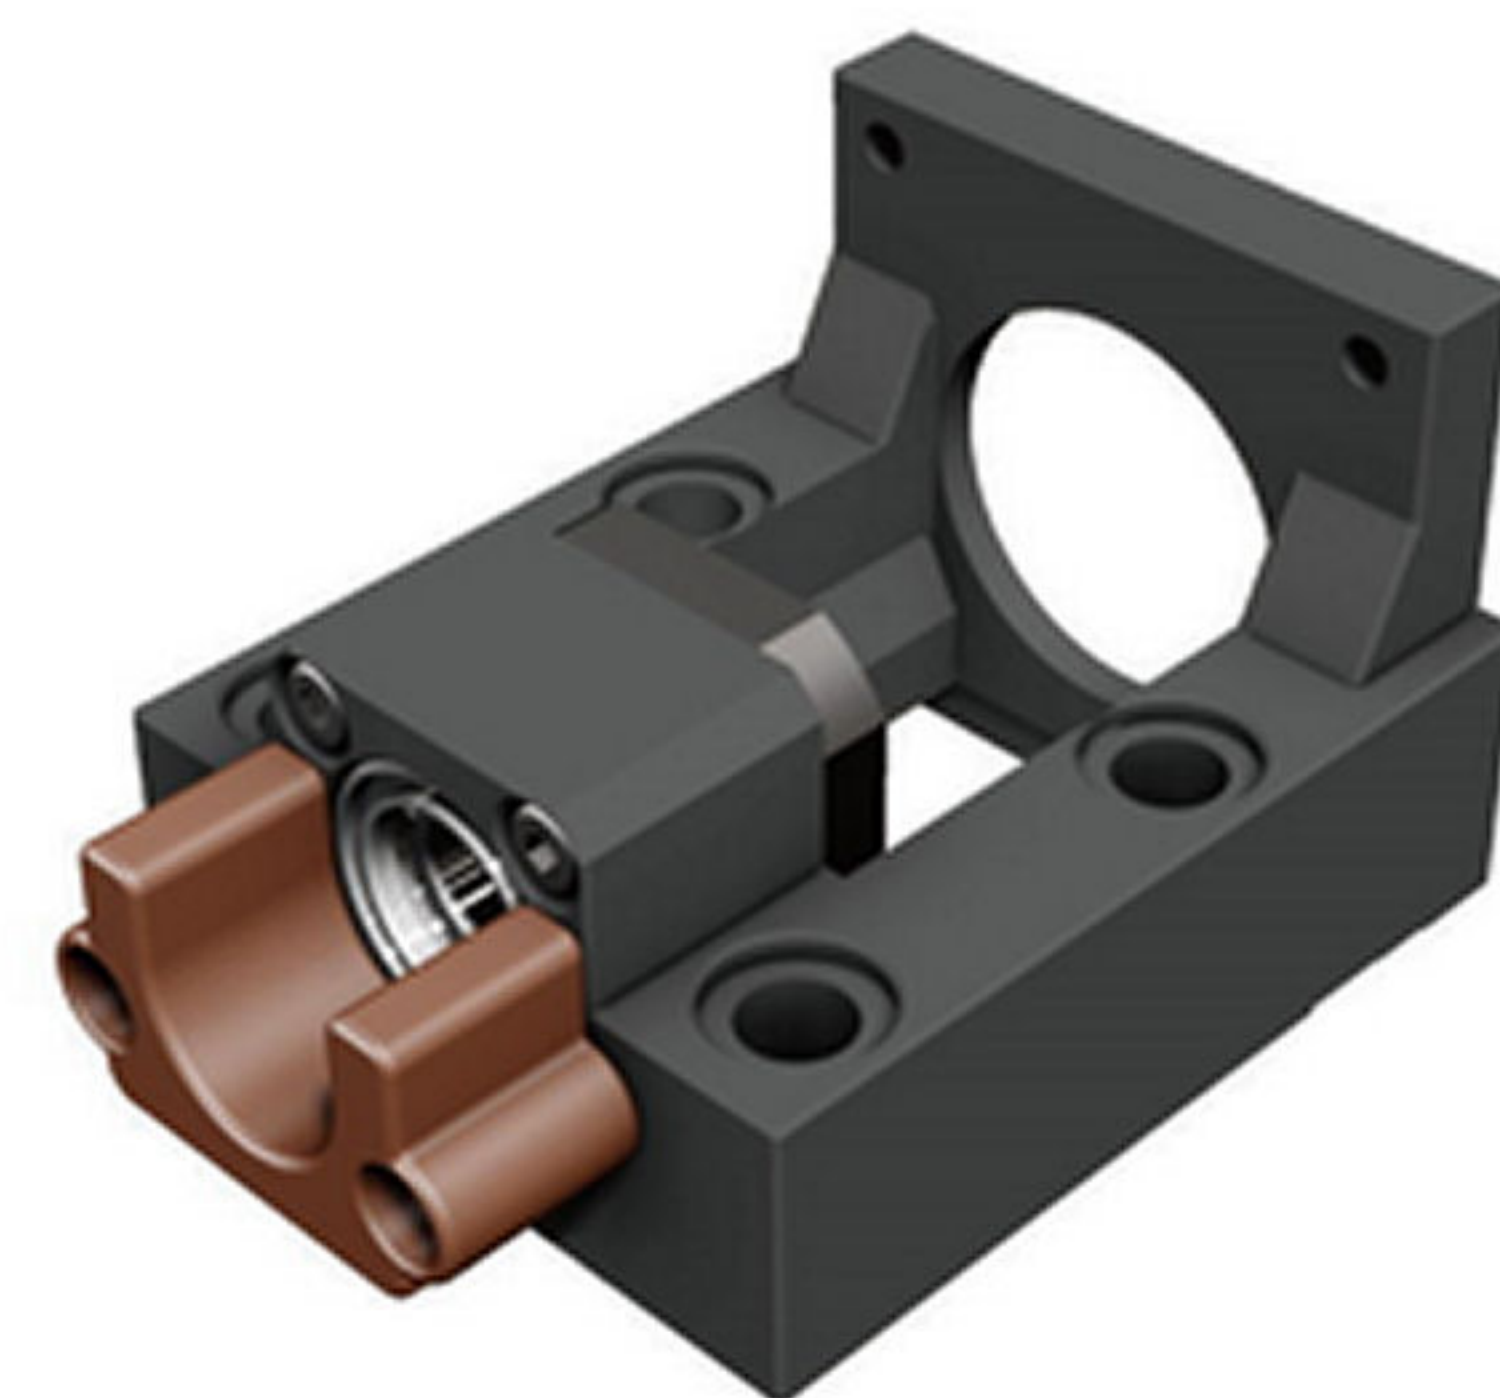
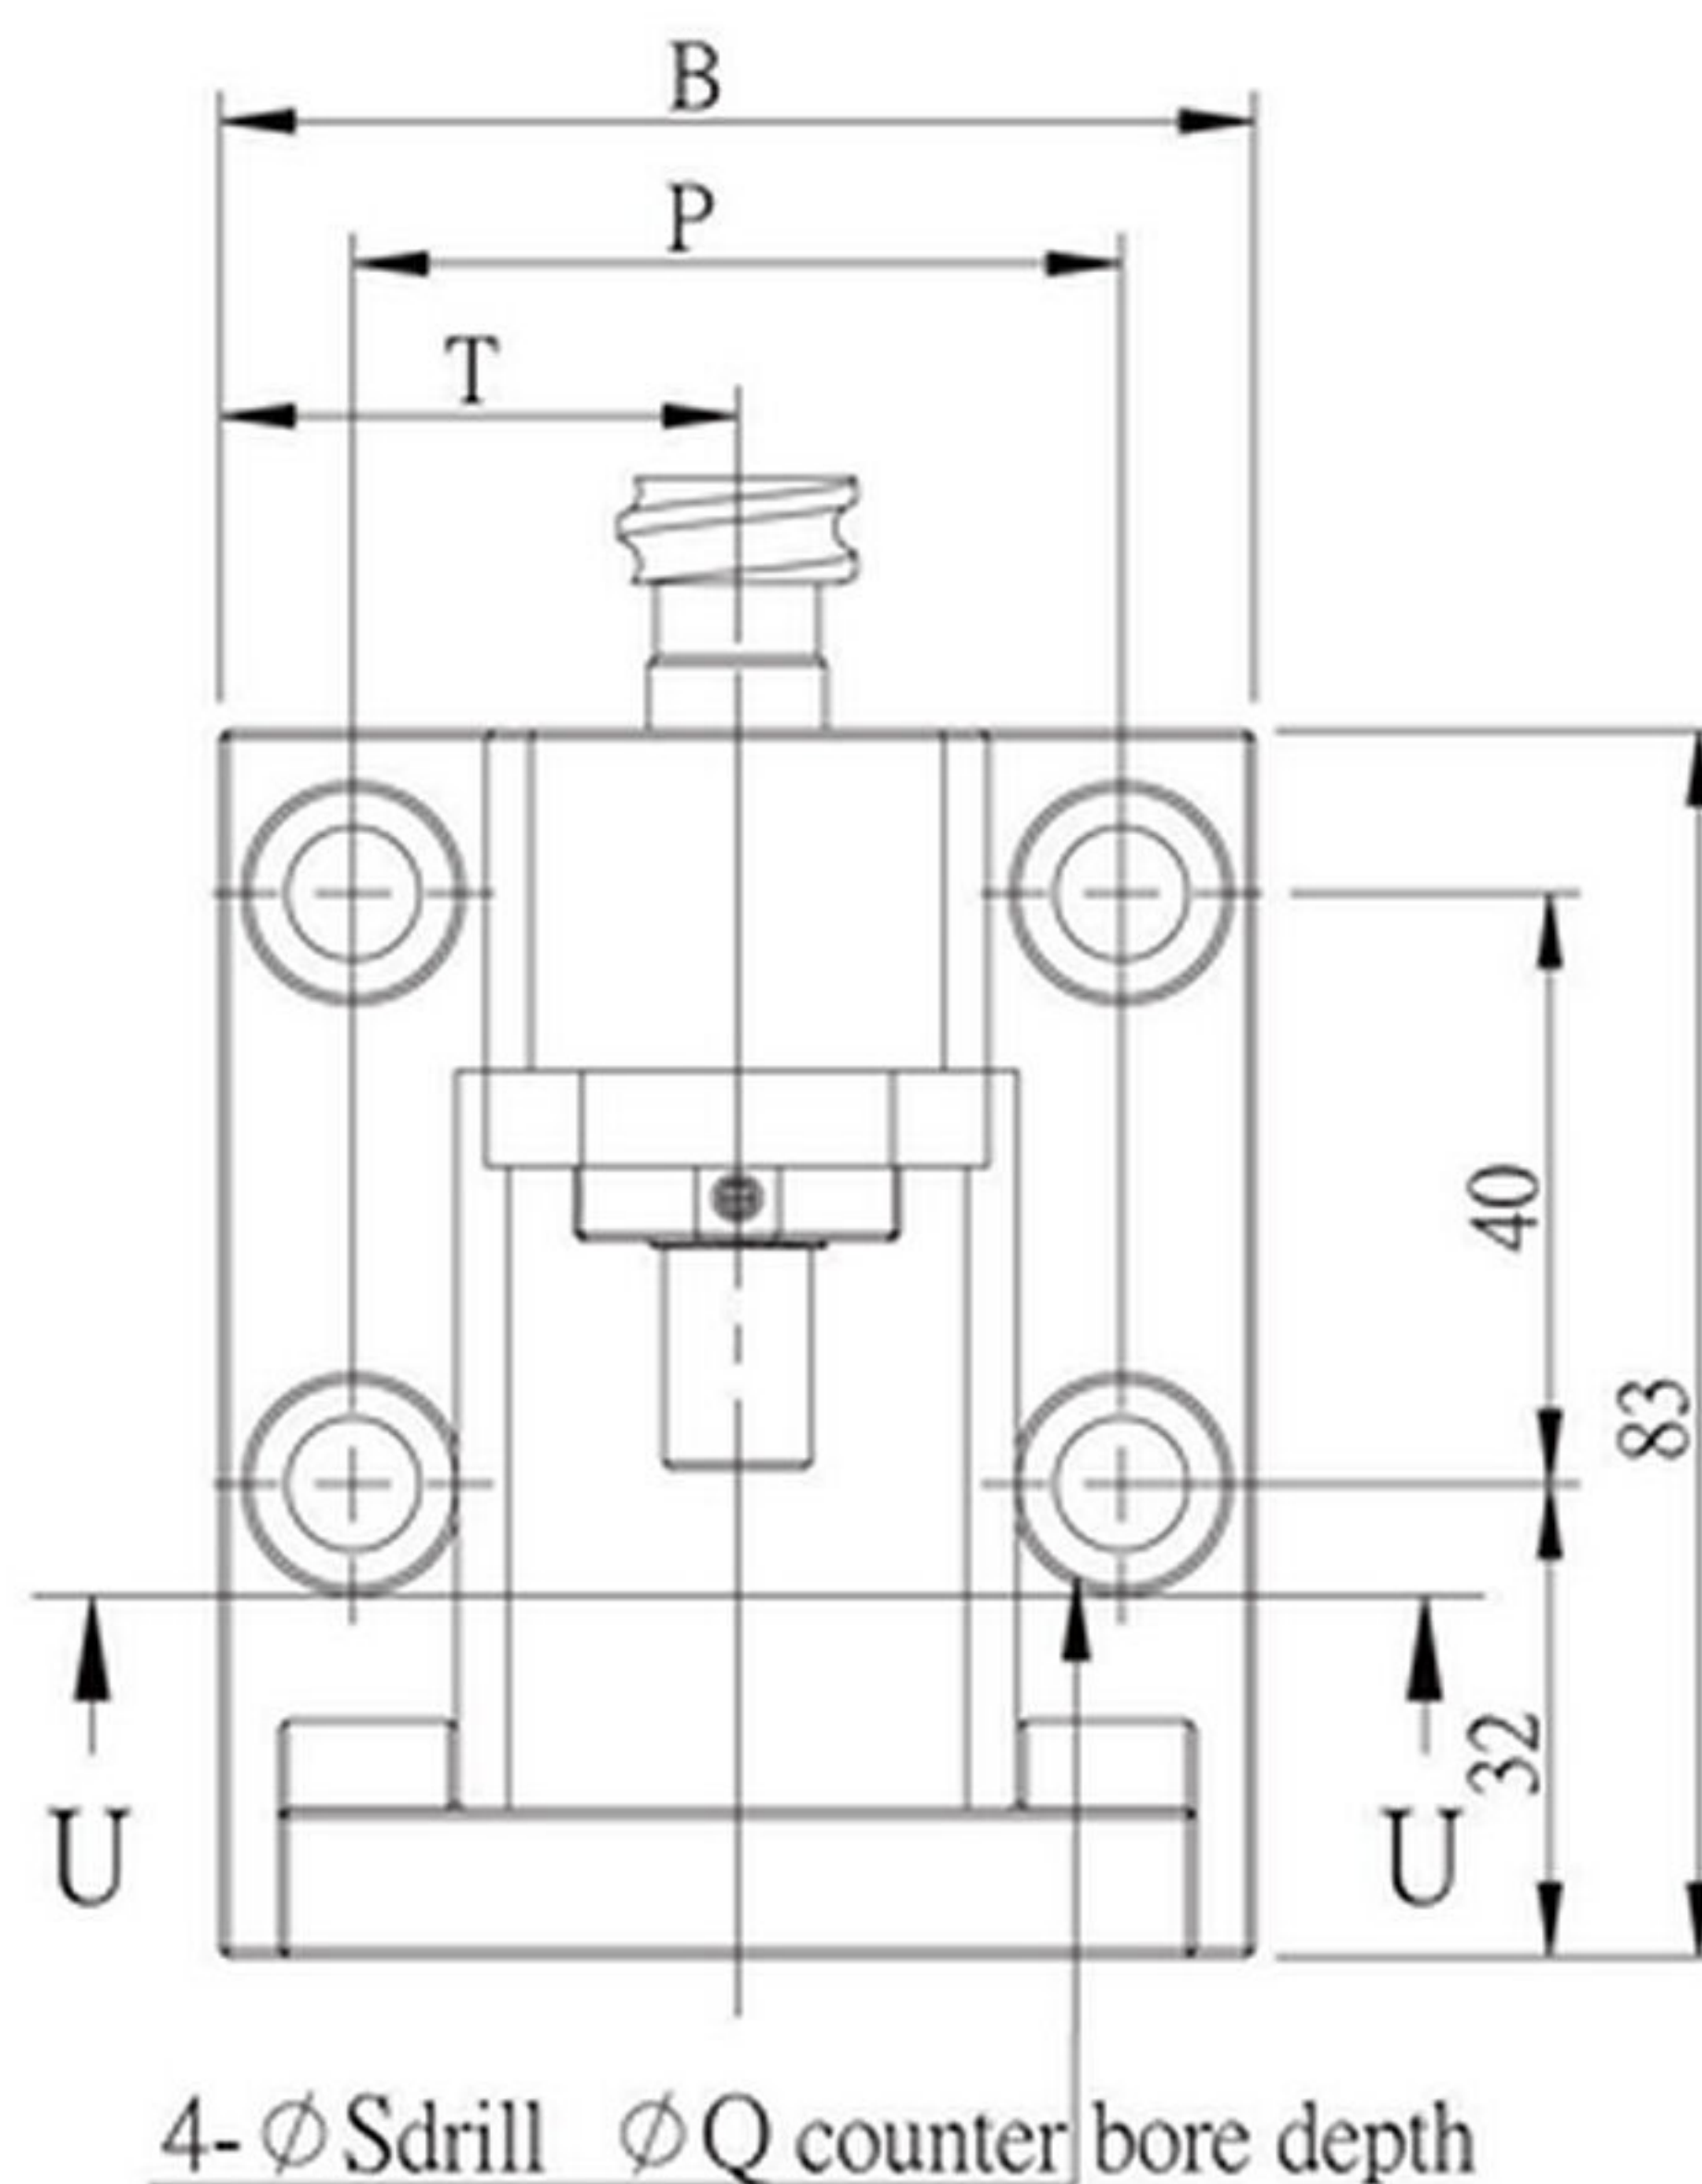
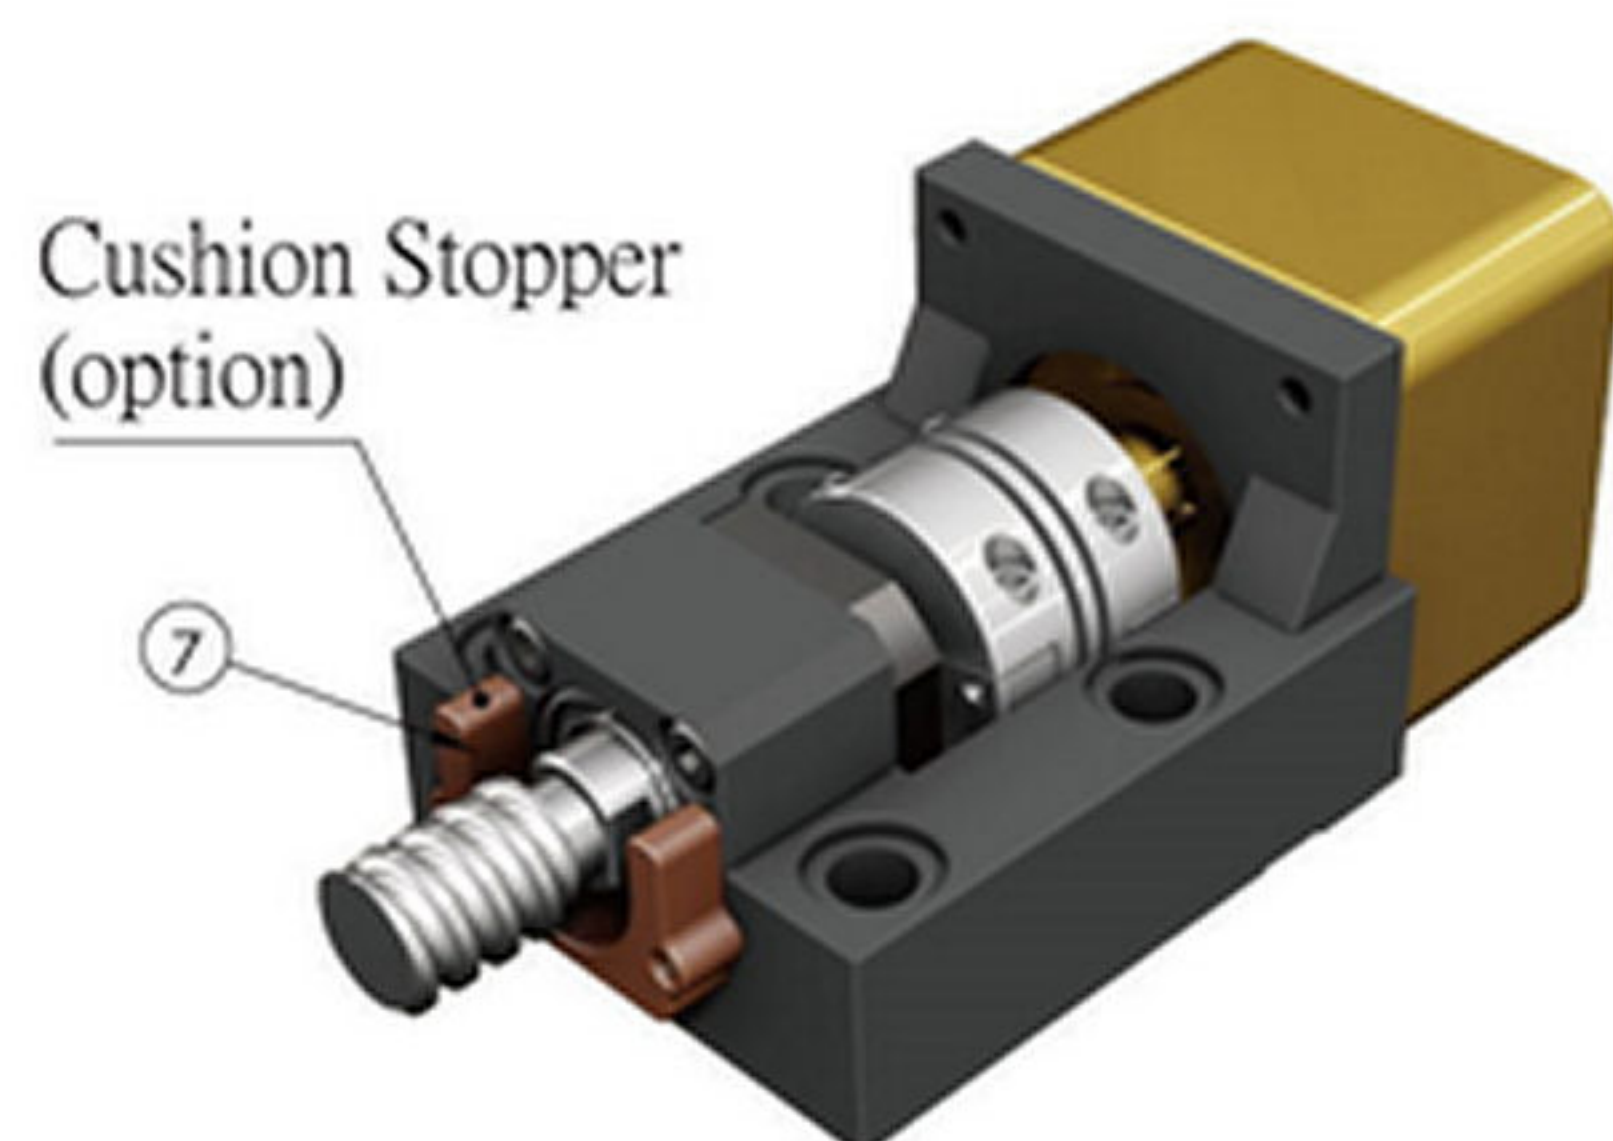
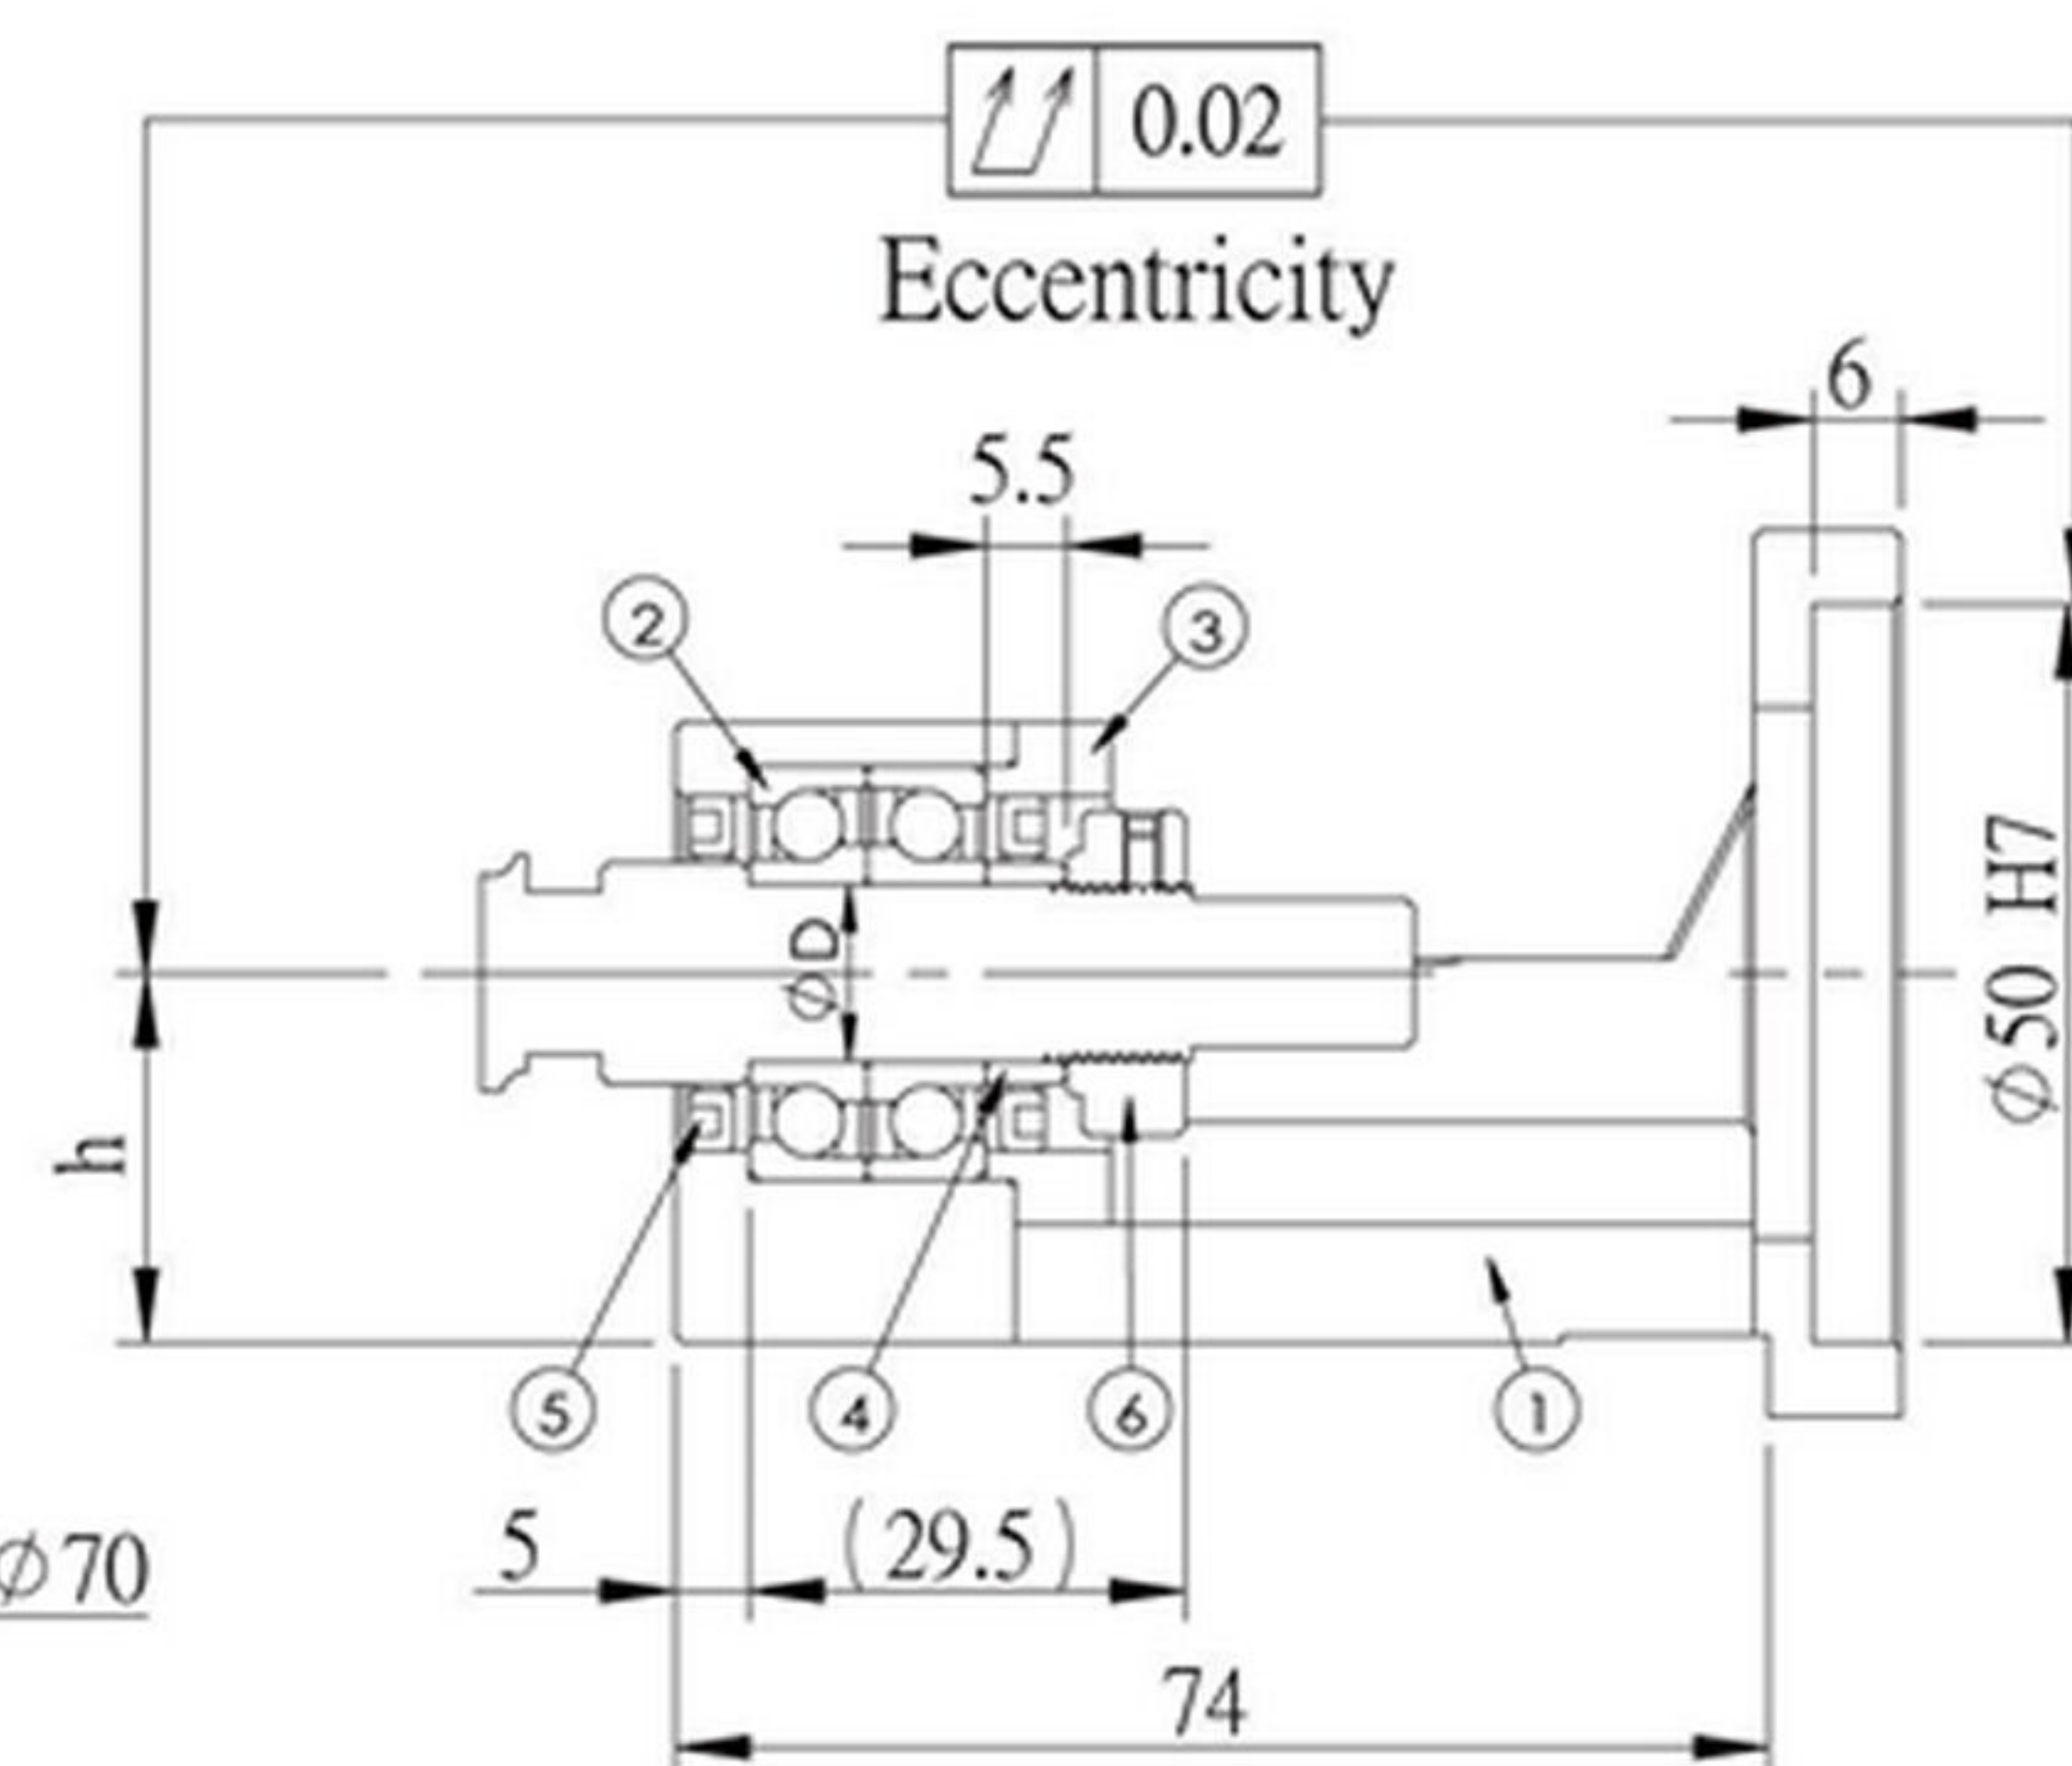


MBCF12

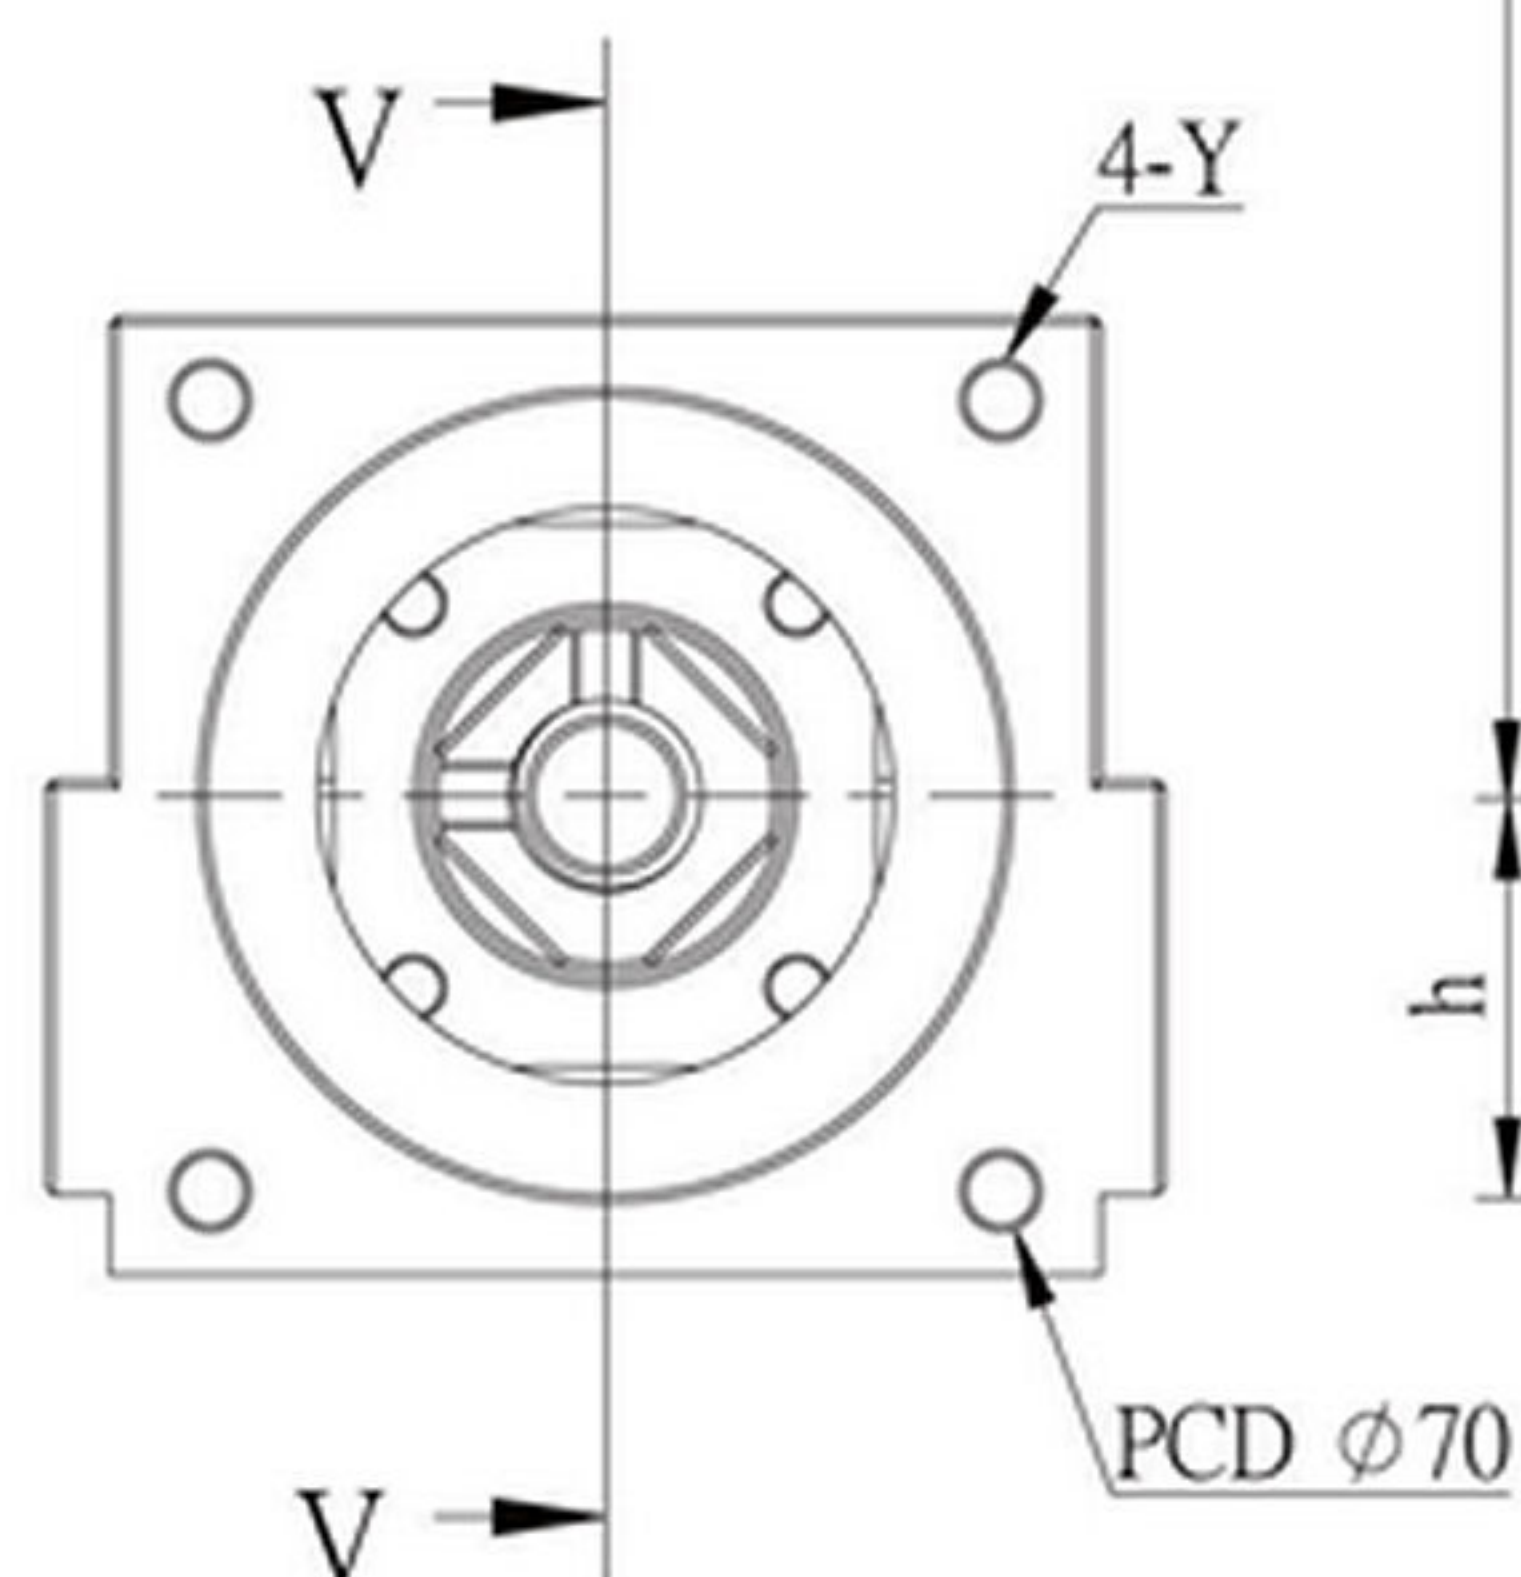

Surface treatment:
Black Oxide
/ Electroless Nickel Plating

No.	Part name	Qty
1	Housing	1
2	Bearing MBC*12 with bearings 7001	1 set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

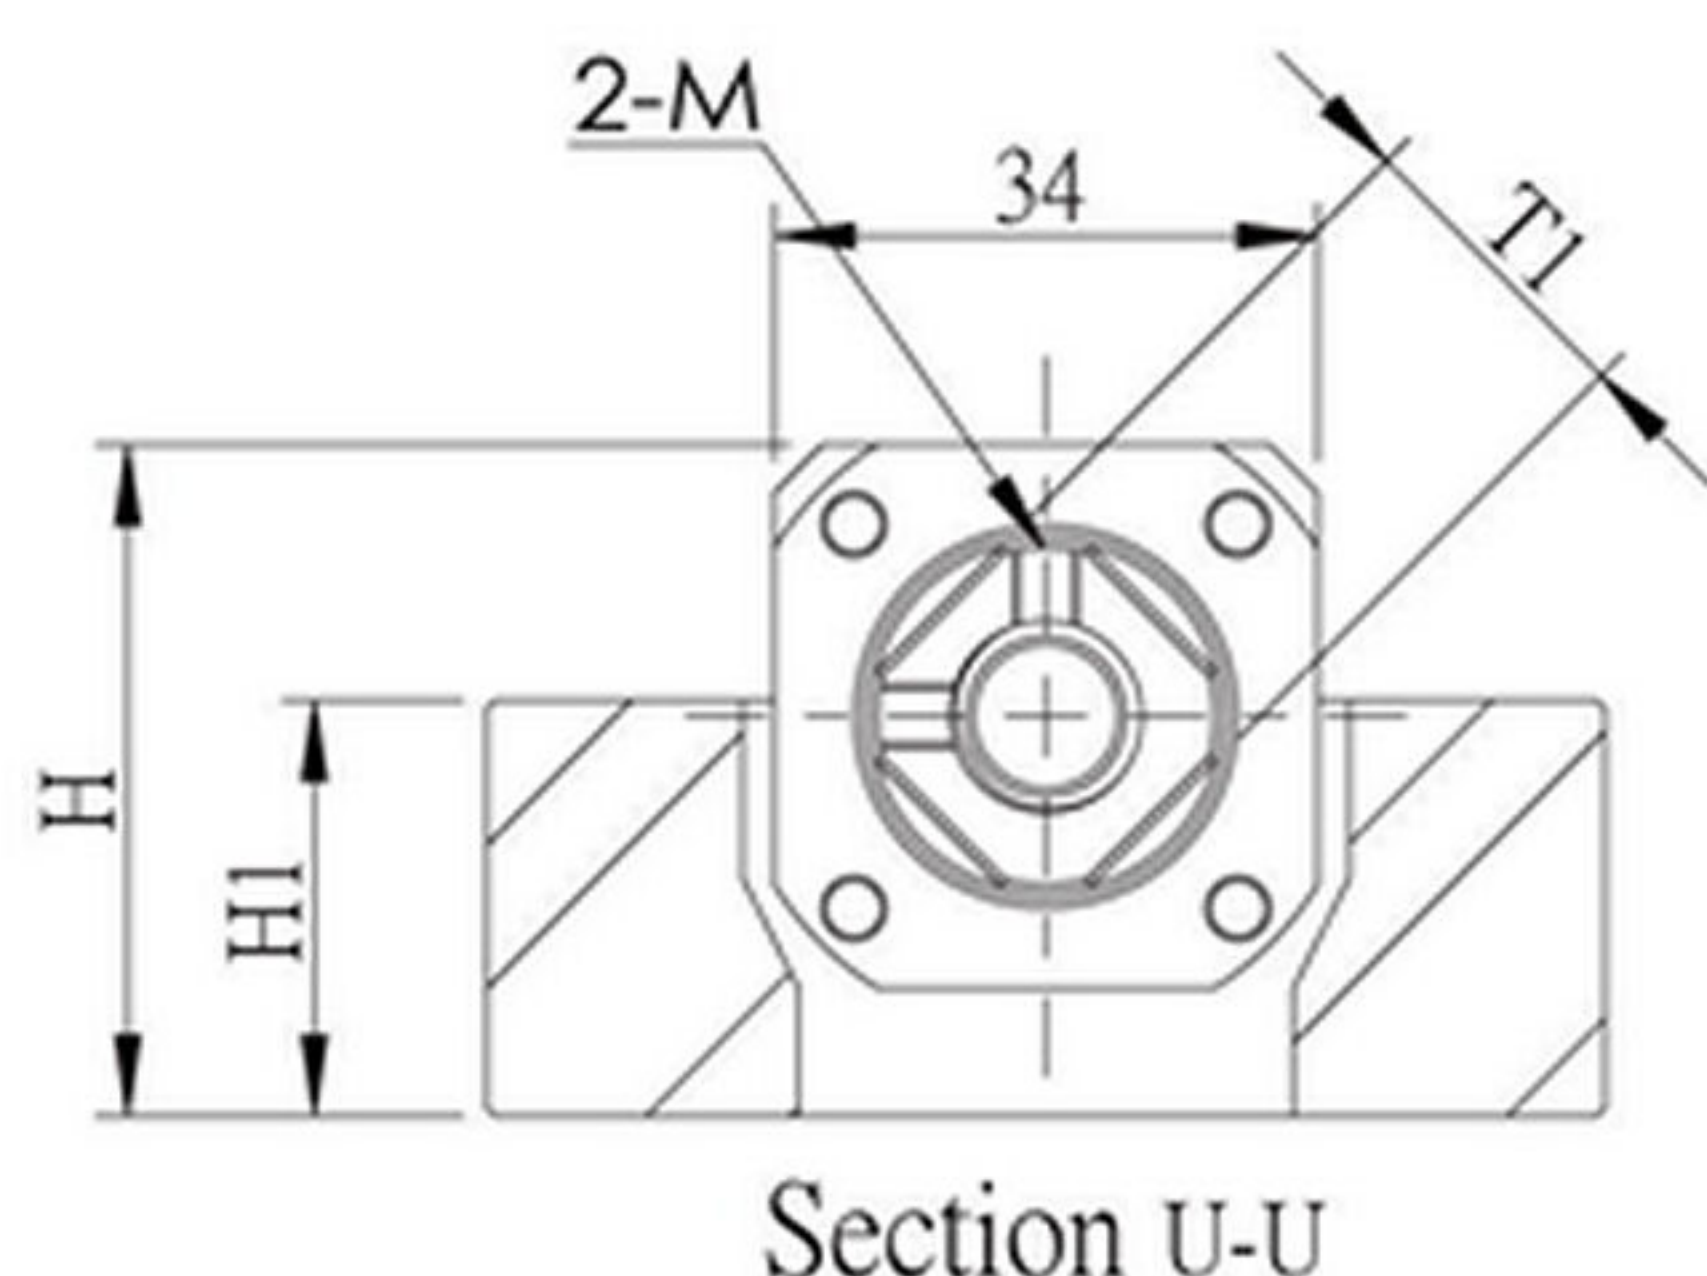

Unit : mm

Model No.	B	P	T	H	H1	$h_{\pm 0.02}$	ϕD	T1	M	Y	S	Q	Weight (Kgs)	Support unit Supported-side	Suggest Coupling
MBCF12-D	63	50	31.5	37	21	20	12	□19	M4	M5	6.6	11	-	LF12	SGS 34C
MBCF12-DP										M4			-	LFA 15	

Note :

1. The matched bearing in the support unit has already done the preload.
2. The matched P5 bearings are assembled in DF way, which is the most suitable for ball screw use.