

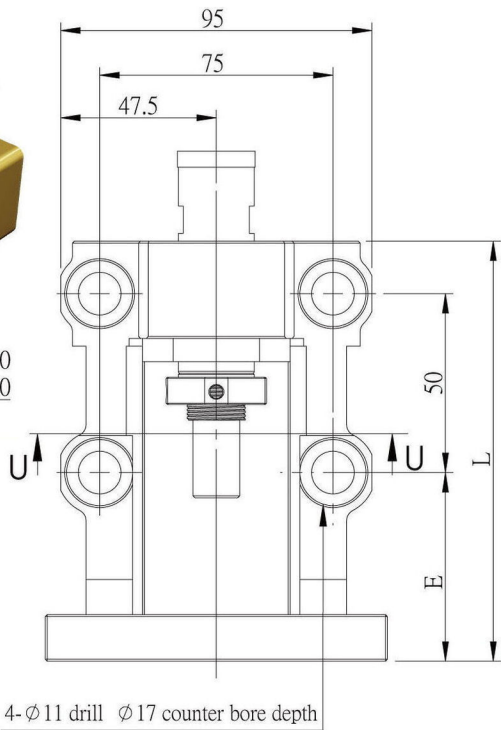


MBCF20



Fig→Fixed+Supported

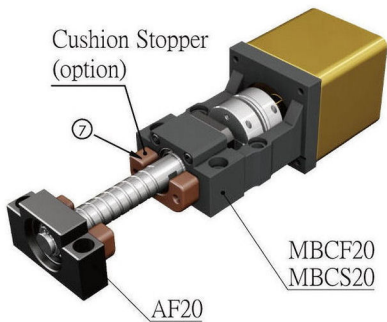

Surface treatment:
Black Oxide / Electroless Nickel Plating

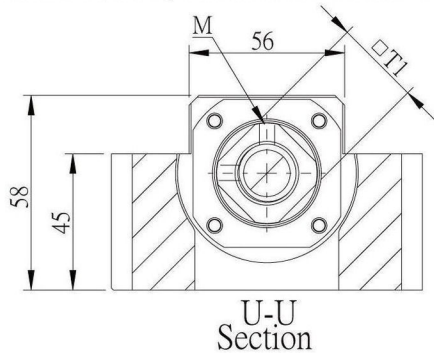

No.	Part name	Qty
1	Housing	1
2	Bearing MBCF20 with bearings 7204	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

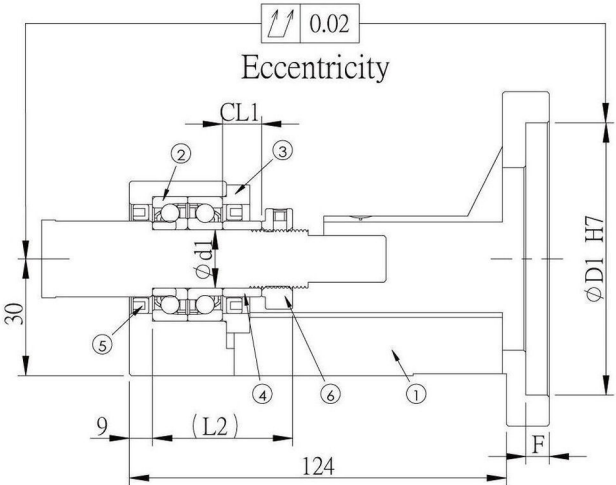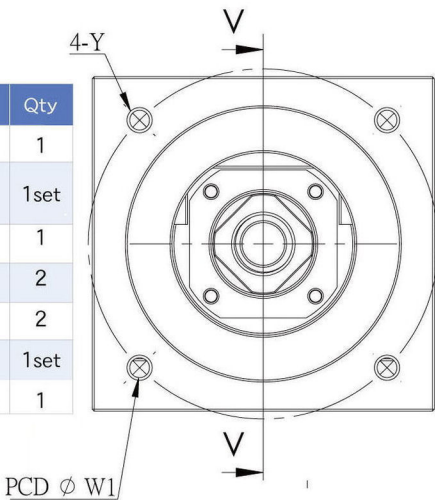

Unit : mm

Model No.	D1	W1	Y	L	Shaft diameter d1	CL1	L2	E	F	M	T1	Weight (Kgs)	Support unit	Suggest Coupling	
													Supported-side		
MBCF20-X	80	100	M6	140	20	11	50	70	8	2-M4	□30	2.76	EF 20 AF 20	SGS 50C	
MBCF20-Y	95	115	M8	141				71				2.71		SGS 50C	
MBCF20-YP			M6	141				71				2.73		SGS 57C	
MBCF20-S	110	130	M8	151				81	10			3.6	SGS 57C		
MBCF20-G		145		153				83				3.77			

Note :

- 1.Bearings made preload , and axial clearance is 0 mm.
- 2.DF type, P4 grade preloaded duplex angular contact ball bearing suitable for ballscrew use.